


TCT07056

Tubing Dispenser NPD Series

- Multipoint discharging tube dispenser
- Teflon or Silicone tube can be used
- Maximum channels for Teflon tube: 4
- Maximum channels for Silicone tube: 10
- Purpose: Dispensing of Instant adhesive, epoxy, silicone, UV grew, oil, etc

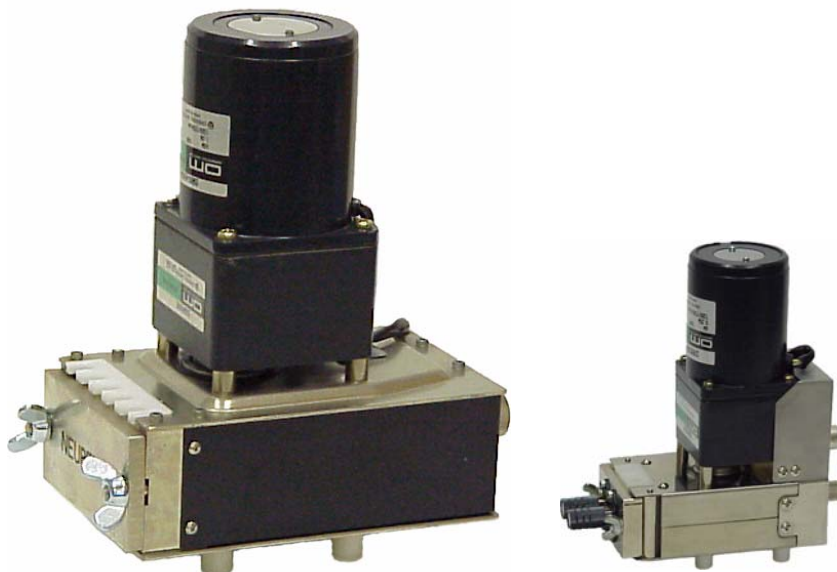

1) Standard specifications (Teflon[®] tube):

Specs.	Model	306MDC	340MDC
Width of center keyboard		8mm	12mm
Number of channel(position)		1 Ch	4 Ch
Cycle time	Sec/Cycle	1.2 sec	1.2 sec
Max. discharging per channel		40 μ l	46 μ l
Examples for Tube ϕ & discharging volume (Inside ϕ x Outside ϕ)	0.5mm x 1.0mm	0.9 μ l	1.2 μ l
	1.4mm x 2.0mm	8 μ l	12 μ l
	2.4mm x 3.0mm	22 μ l	32 μ l
	3.3mm x 3.9mm	40 μ l	46 μ l

TIC Corporation Ltd.
 3-7-3 Horyu Bldg. 3F, Asakusabashi, Taito-Ku
 Tokyo, Japan, 111-0053
 Tel: +81-3-3862-3010
 Fax: +81-3-3862-3614

2) Standard specifications (Silicone tube):

Model	306MD		340MD	
Width of center keyboard	8mm		12mm	
Cycle time	1.2 sec		1.2 sec	
Tube diameter(ID x OD)	Ch	$\mu\ell$	Ch	$\mu\ell$
$\phi 0.5 \times \phi 3.0$	4	2	10	2.8
1 x 3	4	8	12	12
1.5 x 4	3	18	10	26
2 x 4	3	34	10	46
2 x 6	none	none	6	46
3 x 5	3	75	10	100
3 x 6	none	none	6	100

☆ Please contact us for more detailed information.