

**ENGINEERING  
YOUR SPRAY SOLUTION**



## **Precision Spray Nozzles for Tank and Equipment Cleaning**



# **Tank and Equipment Cleaning**

# LECHLER NOZZLES FOR TANK AND EQUIPMENT CLEANING – ECONOMICAL, SAFE AND PROVEN OVER TIME

Lechler is a world leader in nozzle technology. For over 140 years, we have pioneered numerous groundbreaking developments in this field. Comprehensive nozzle engineering and a deep understanding of application-specific requirements to create products that offer outstanding performance and reliability.



## Optimized cleaning processes

Companies all over the world in a wide range of industries rely on Lechler tank and equipment cleaning nozzles for thorough cleaning of all kinds of tank sizes, machines and equipment.

### Your advantages

- None of the risks, restrictions and costs related to manual tank cleaning
- Modern nozzle technology cuts cleaning fluid consumption and reduces downtimes
- The cleaning process is trouble-free, repeatable and verifiable

## New products for practically any application

The Lechler tank and equipment cleaning nozzle range features innovative drive concepts, state-of-the-art nozzle design as well as a large choice of sizes and materials. The scope of our portfolio is unique to the market and offers the perfect solution for every application.

### High cleaning performance at low pressure

Thanks to their sophisticated technology, Lechler tank and equipment cleaning nozzles already achieve high cleaning performance even at low pressures. This saves on high energy costs. The nozzles are driven and lubricated by the cleaning fluid and are therefore maintenance-free and reliable.


## Your experienced specialist – anywhere in the world

With subsidiaries in Hungary, the USA, England, India, China, France, Belgium, Sweden, Finland and Spain as well as qualified agents in over 40 countries, Lechler is represented all over the world. We will help you solve your cleaning problems – wherever you are.

## Industries


- Chemical industry
- Food & beverage industry
- Tank and equipment engineering
- Machine tool engineering
- Cosmetics industry
- Pharmaceutical industry
- Biotechnology
- Agricultural engineering

# THE ART OF MAKING THE RIGHT CHOICE

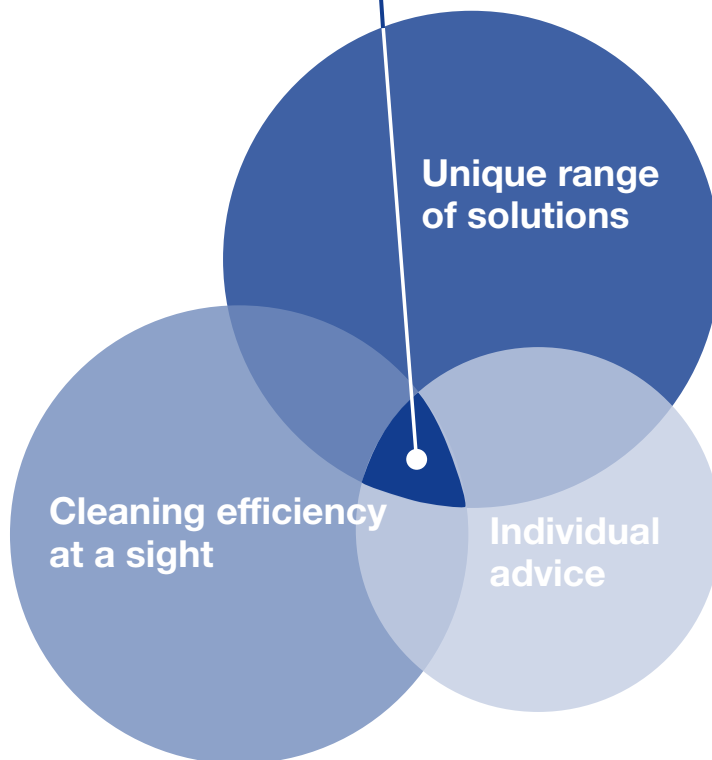

## Unique range of solutions

There is no one single perfect tank and equipment cleaning nozzle. That is because requirements differ greatly in each individual application. Over the course of the years, we have developed specialized nozzles for a wide variety of different purposes. Today we offer the world's largest nozzle range. This includes everything from standard nozzles to individual nozzles for very specific tasks.



## Cleaning efficiency at a sight

At first sight, finding the right nozzle for your particular application from the variety of nozzles we offer may appear overwhelming. That is why we have defined five cleaning efficiency classes - from a simple rinse to removing the most difficult soil. These individual efficiency classes, information on the tank size and recommended operating pressure allows you to quickly find the most suitable nozzle for your application.

**You will find a detailed description of the cleaning efficiency classes on page 18.**



## Individual advice

It goes without saying that we provide you with personal service on the subject of tank and equipment cleaning and explain the different possibilities to you. Contact us and let us define the best possible solution for the most efficient cleaning.

CONTENT	Page
Applications	4-5
<b>Planning aids</b>	<b>6-18</b>
Cleaning efficiency class 1	19
Series 527	20
Series 540/541	22
Series 5B2/5B3	24
Cleaning efficiency class 2	29
»PicoWhirly«	30
»MicroWhirly«	32
»MiniWhirly«	34
»PVDF MicroWhirly«	36
»NanoSpinner«	38
»MicroSpinner«	40
»MiniSpinner«	42
»PTFE Whirly«	44
»PopUp Whirly«	46
»PopUp Whirly« ATEX	49
Cleaning efficiency class 3	53
»HygienicWhirly«	54
»Whirly«	56
»Gyro«	58
Cleaning efficiency class 4	61
»XactClean® HP«	62
Rotation monitoring	65
»XactClean® HP+«	66
Cleaning efficiency class 5	69
»IntenseClean Hygienic« 5TA	70
»IntenseClean Hygienic« 5TB	72
»IntenseClean« 5TM	74
Rotation monitoring	76
Spray shadow remover	77
»PopUp Clean«	78
Series 490/491	80
Series 524/525	81
Series 632/633	82
Series 676	84
Other nozzles	86


# LECHLER NOZZLES FOR TANK AND EQUIPMENT CLEANING

## For every application



From the easiest to most difficult soils – Lechler has the optimum solution for removing soils of all kinds.

## Cleaning in Place (CIP)

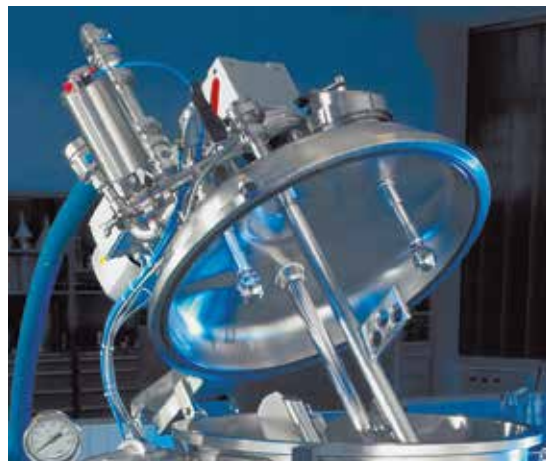

Many of Lechler's precision nozzles for tank and equipment cleaning are CIP-capable and can remain in the installation during the production process.



## Hygienic equipment cleaning



Even difficult cleaning tasks with special requirements, such as in the food and beverage industry, can be performed easily with Lechler nozzles.

## The right nozzle for every tank



Our extensive product range includes the right nozzle size for every application – from a small test tube to a large fermentation tank for bioethanol production.

# WHAT YOU SHOULD KEEP IN MIND WHEN PLANNING

## ① The fundamentals of cleaning technology

Sinner's circle  
 Cost reduction by efficient cleaning processes

## ② Mechanical cleaning effects with Lechler rotating cleaning nozzles

Mechanical cleaning  
 Impact  
 Comparison of rotating cleaning nozzles and static spray balls  
 Influence of chemistry and temperature  
 Foam cleaning with nozzles  
 CIP- and SIP-cleaning

## ③ Lechler rotating cleaning nozzles designs

Operating principles  
 Connection options  
 Materials  
 Hygienic requirements  
 Nozzle wear  
 Material certificates  
 ATEX

## ④ Conversion tables

## ⑤ Cleaning efficiency classes

## ① The fundamentals of cleaning technology

### Sinner's circle

The Sinner's circle illustrates the interplay between the four main factors for successful cleaning:

- Chemistry (choice of cleaning agent)
- Mechanical (removal of soil via pressure or friction)
- Temperature (at which cleaning is performed)
- Time (duration of the total cleaning processes)

The proportion of the individual factors as a part of the entire cleaning can be varied, provided that the total is 100 per cent. This results in significant savings potentials.

As a result, the intensification of mechanical cleaning enables the consumption of cleaning agents or the duration of cleaning to be reduced. Consequently, the mechanical factor that takes up a greater part of the Sinner's circle, while the other factors can end up being reduced.

### Cost reduction by efficient cleaning processes

This is precisely where our nozzles and rotating cleaning nozzles come into play, having been specially developed for delivering a high mechanical cleaning action. Their greater efficiency helps to permanently reduce on going costs for energy and cleaning agents, and also the duration of cleaning. Consequently a one-off investment in improved nozzle technology pays for itself after only a short time.

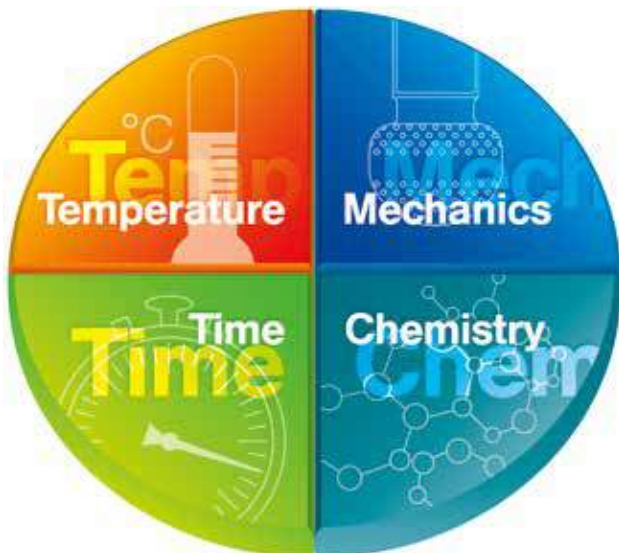


Figure 1: Sinner's circle with equal proportions of the temperature, time, chemistry and mechanical factors.

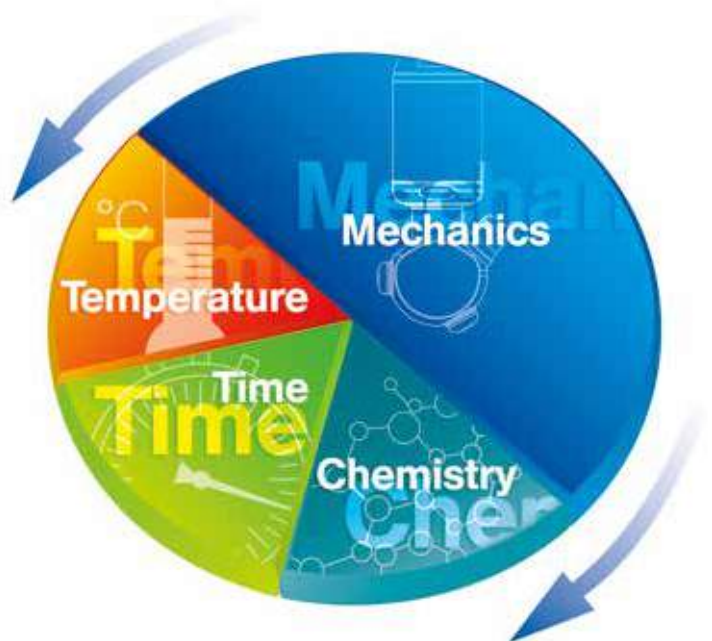


Figure 2: Lechler nozzles and rotating cleaning nozzles have high mechanical cleaning efficiency. This reduces the proportion of the other factors, as well as the resulting costs.

② Mechanical cleaning effects with Lechler rotating cleaning nozzles

Mechanical cleaning

Rotating cleaning nozzles deliver the greatest impact when cleaning the surface area of the tank. To achieve this, large droplets must strike at high speed. This enables thick soil to be removed that cannot dissolve in the cleaning fluid. Important influencing factors are the distance between the nozzle and wall, and the operating pressure.

If either are too great the fluid will break down into smaller droplets (see Figs. 3 and 4) and the impact will be reduced.

Besides the impact, the fluid running down the tank wall also has a significant cleaning effect. If the formed film is thick enough, the resulting shear stresses can remove light to moderate soil. In that case, unsprayed patches are less of an issue than is the case during impact cleaning (see Fig. 5).

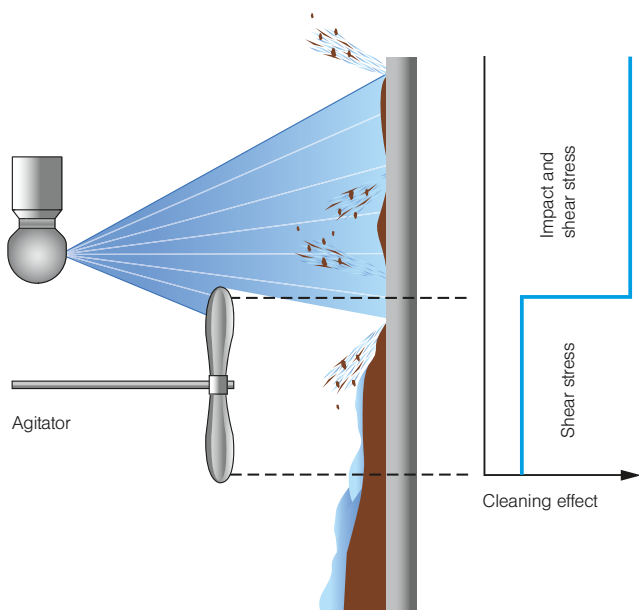


Figure 5: Cleaning mechanisms, impact and shear stress

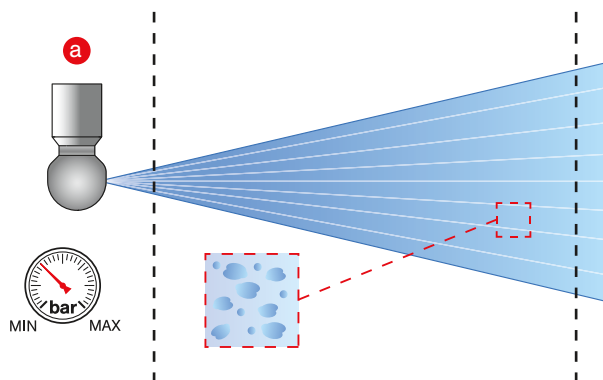


Figure 3: Rotating cleaning nozzles with recommended operating pressure

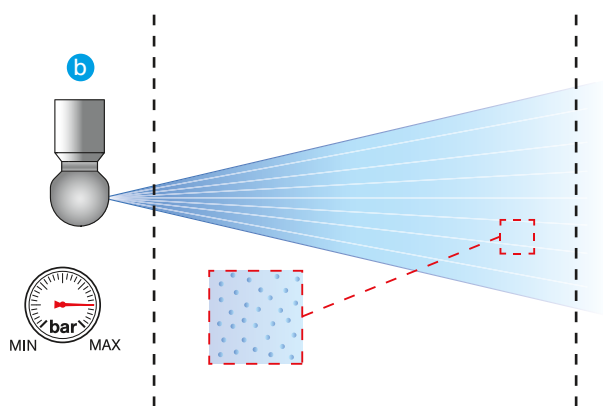


Figure 4: Rotating cleaning nozzles with operating pressure too high

# WHAT YOU SHOULD KEEP IN MIND WHEN PLANNING

## Impact

The force of impact when using of a liquid jet on a surface plays an important role in cleaning technology. The ratio of the force (F) to the surface (A) is referred to as the Impact (I).

$$I = \frac{\text{Impact force}}{\text{Impact surface}} = \frac{F}{A} \left[ \frac{\text{N}}{\text{m}^2} \right]$$

It can be controlled via the following parameters:

## Impact surface and spray angle (a)

The impact surface is the area where the droplet strikes. The smaller the surface area, the greater the impact values. Nozzles with high impact are, for example, solid stream nozzles and flat fan nozzles with a narrow spray angle (see Fig. 6).

## Flow rate (b)

Increasing the flow rate by using a larger nozzle increases the impact, assuming that the other parameters (spray angle, pressure and medium) remain the same (see Fig. 6).

## Pressure

With rotating nozzles, the supply pressure normally influences the rotation speed. The higher the rotation speed, the greater the tendency of rotating nozzles to atomize the fluid into much smaller droplets.

This effect has a negative influence on impact. Lechler rotating cleaning nozzles should therefore be used at the recommended operating pressure range.

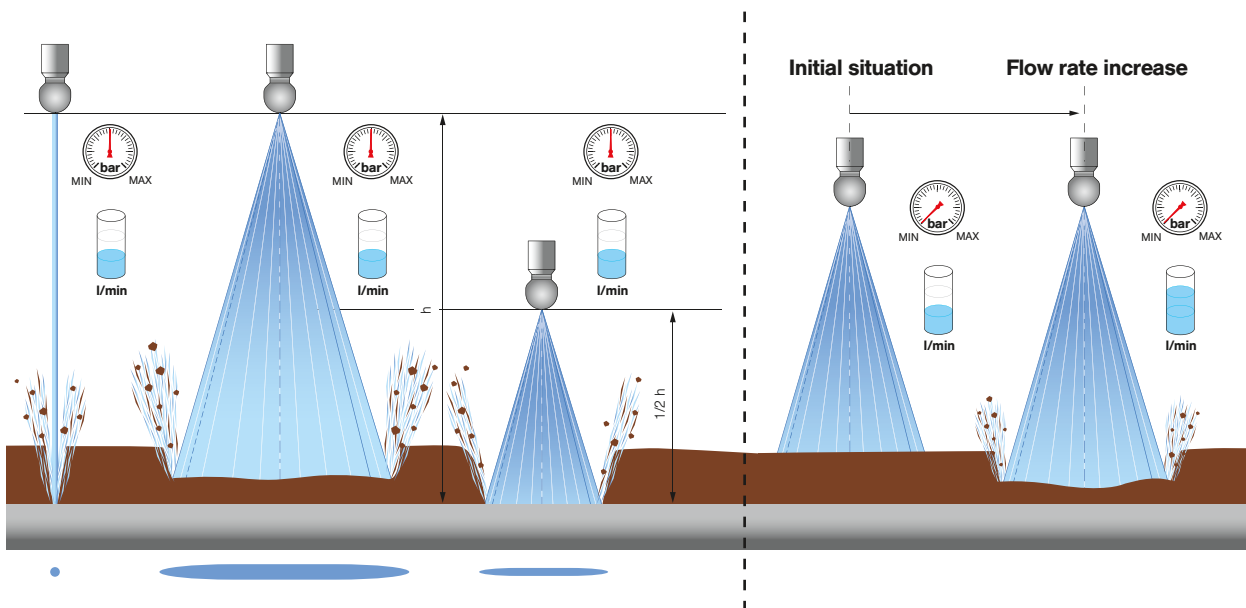


Figure 6:

a) Constant pressure and flow rate, variable spray shape and spray distance

b) Constant pressure, spray shape and spray distance, variable flow rate



### Comparison of rotating cleaning nozzles and static spray balls

Due to their simple construction, static spray balls are economical and are likely to miss important areas. Whereas rotating cleaning nozzles spray the entire tank wall in a fan-like pattern, the

jets from spray balls strike only in concentrated spots. The remaining surface is simply cleaned by the shear stresses of the fluid running off (see Fig. 7). The fluid consumption is therefore significantly greater in comparison with rotating cleaning nozzles.

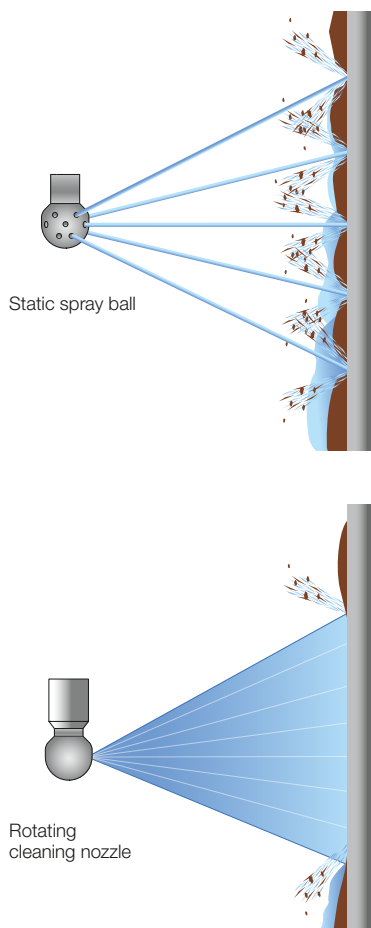


Figure 7: Comparison of rotating cleaning nozzles and static spray balls

### Influence of chemistry and temperature

The chemical cleaning effect takes part in almost all tank cleaning applications when the soil is dissolved in the cleaning medium or the bonding between soil and tank surface is reduced. Higher temperatures can support the chemical cleaning effect.

### Foam cleaning with nozzles

Foam cleaning is primarily based on the chemical cleaning effect. Since the foam sticks more firmly to the surface, it can be more effective than cleaning fluids that drip off quickly. The mechanical cleaning effect plays a correspondingly subordinate role. Here, the task of the nozzle is to distribute the foam evenly. Your end result for this application depends on the type of foam.

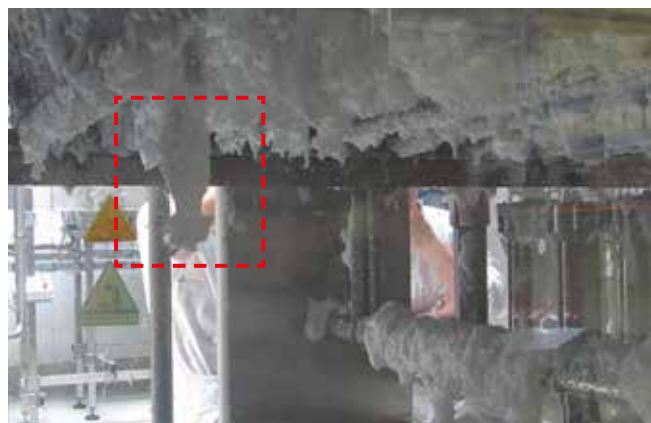


Figure 8: Foam cleaning with a Lechler PVDF MicroWhirly

### CIP- and SIP-cleaning

Cleaning in Place (CIP) is one of the standard cleaning methods in the food and pharmaceutical industries. This is a process where the cleaning and disinfectant solutions circulate in the production systems during the cleaning process. The nozzles installed in the systems and do not need to be dismantled during the process.

The correct combination of steps from Sinner's circle leads to a reliable and reproducible process. Almost all Lechler rotating cleaning nozzles and static spray nozzles are capable of CIP.

If sterilization is performed after CIP-cleaning with hot water or saturated steam, this is referred to as SIP-cleaning (Sterilization in Place).

# WHAT YOU SHOULD KEEP IN MIND WHEN PLANNING

## ③ Lechler rotating cleaning nozzles designs

### Operating principles




#### Static

Static spray balls do not rotate and therefore require considerably more fluid. They are used primarily for rinsing tanks. They are inexpensive to purchase and are very robust (trouble-free).




#### Free-spinning

The cleaning fluid drives the spray head by means of specially positioned nozzles. The rapidly repeated impacts remove the soil and rinses it from the tank surface. This results in optimum cleaning efficiency at low pressures in small to medium-sized tanks.



#### Controlled rotation

The rotating head is driven by the fluid. A turbine wheel with an internal gear is used to control the rotation. This ensures that the speed remains in the optimum range even at higher pressures. The droplets produced are larger and strike the tank wall at higher speed. These rotating cleaning nozzles thus achieve an even higher impact which is especially for large tanks important.



#### Gear-controlled


The cleaning fluid drives an internal gear by means of a turbine wheel so that the spray head rotates by two axes. The solid jet nozzles mounted on the spray head produce powerful jets. These jets sweep the entire tank surface in a pre-programmed, model-specific pattern during a spray cycle. This requires a certain minimum time. These models generate the highest impact and are therefore ideal for very large tanks and the toughest cleaning tasks.

## Connection options

Lechler offers various options for connecting the rotating cleaning nozzles to the supply line:


### Threaded connection

Most nozzles have a female thread that is screwed onto a male thread on the pipe.

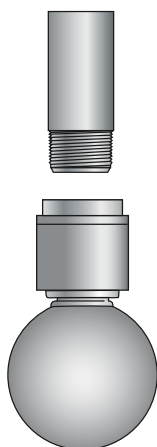


### Slip-on connection

Slip-on connections without threads are often preferred in applications with high sanitary requirements. Here, the nozzle is slipped onto the outer pipe and secured through a horizontal hole by a pin or clamp.

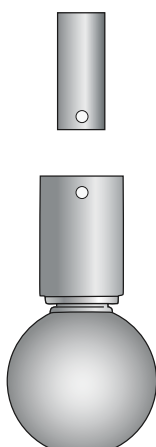


### Tri-Clamp

Tri-Clamp fittings are frequently used in the food and beverage industry. Some rotating cleaning nozzles can be supplied with a compatible adapter.

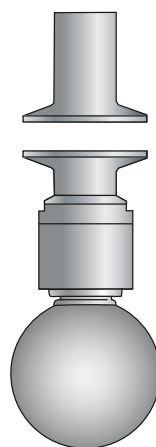

### Welded connection

Almost all nozzles are also available with welded connection on request. These are particularly suitable for applications where sanitary requirements have to be taken into account. Please contact us for further information.

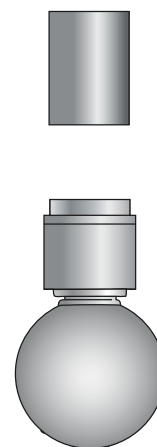

# WHAT YOU SHOULD KEEP IN MIND WHEN PLANNING

## Materials

Lechler tank and equipment cleaning nozzles are made of extremely high-grade materials that are designed to meet high requirements such as resistance to cleaning chemicals or temperature influences. The large choice of different materials – e.g. 316L SS, PVDF, PEEK or PTFE – allows nozzle selection customized to the individual application and operating conditions. In addition, the materials used for the tank and equipment cleaning nozzles are perfectly matched to each other and are thus characterized by very low wear.

The product pages for the individual nozzles provide information on the materials available for the different nozzle types.

In addition to the requirements for material resistance and wear, the materials must also be food grade for use in the beverage, food and pharmaceutical industries. Depending on the application area, the materials must meet different demands.

A large number of the materials used for Lechler tank and equipment cleaning nozzles

comply with the requirements of the FDA or conform to (EC) 1935/2004.

Further information on conformity is provided on the product pages.



The FDA, the U.S. Food & Drug Administration, is a federal agency which oversees those two industries. Materials used in making Lechler products are compliant with the requirements of FDA regulation 21 CFR for use in food applications.



The regulation (EC) No. 1935/2004 of the European Parliament regulates general safety requirements to all food and beverage contact materials.

**The respective logo on the product pages indicates which requirements are met.**

## Hygienic requirements

Lechler's tank and equipment cleaning nozzles are designed so that they meet hygiene requirements.

This is reflected, for example, in the self-draining function, minimized dead space in the nozzles as well as an external design without unnecessary gaps and edges. At the same time, the nozzles are designed with the lowest possible surface roughness.

Lechler also offers specially certified nozzles for particular hygiene requirements. The »PTFE Whirly« and 527 series are conforming to 3-A, for example.



»3-A Sanitary Symbol Council Administrative Council for Spray Cleaning Devices (78-01)«

The 3-A council is an organization in the USA that defines criteria for the cleanability of components in the dairy and food industry. Components and systems are examined to establish whether germs adhere to surfaces or existing soiling can be removed.

Components and systems are awarded a »3-A certificate« only if they are easy to clean

or if soil cannot be deposited in the first place.

**The respective logo on the product pages indicates which requirements are met.**

## Nozzle wear

Nozzle wear depends mainly on the operating conditions.

Like with all rotating parts, the bearing assembly is subjected to the highest amount of stress. The following operating conditions accelerate wear:

- Solids in the fluid and hard particles
- Use in a chemically aggressive environment
- Spraying of chemically aggressive substances
- Operating the nozzle above the recommended pressure range or temperature

## Material certificates

Material certificates in accordance with DIN EN 10204 can be issued on request for almost all Lechler tank and equipment cleaning nozzles.

## ATEX



Lechler offers specially designed nozzle series for use in explosive atmospheres. Different nozzle series have an ATEX approval that was issued by an external certification institute.

**The respective logo on the product pages indicates which requirements are met.**



#### ④ Conversion tables

##### p Pressure

Unit	Conversion			
	bar	Pascal [Pa] = N/m <sup>2</sup>	psi	lb/sq ft
<b>1 bar</b>	1	1·10 <sup>5</sup>	14.5	2089
<b>1 Pascal [Pa]</b>	1·10 <sup>-5</sup>	1	14.5·10 <sup>-5</sup>	0.0209
<b>1 psi</b>	0.06895	6895	1	144
<b>1 lb/sq ft</b>	0.479·10 <sup>-3</sup>	47.9	6.94·10 <sup>-3</sup>	1

##### V Volume

Unit	Conversion			
	l	m <sup>3</sup>	Imp. gal	US gal
<b>1 l (1 dm<sup>3</sup>)</b>	1	1·10 <sup>-3</sup>	0.22	0.264
<b>1 m<sup>3</sup></b>	1000	1	220	264.2
<b>1 Imp. gallon</b>	4.546	4.546·10 <sup>-3</sup>	1	1.201
<b>1 US gallon</b>	3.785	3.785·10 <sup>-3</sup>	0.8327	1

##### V Flow rate

Unit	Conversion				
	l/min	l/s	m <sup>3</sup> /h	US gal/ min	Imp. gal/ min
<b>1 l/s</b>	60	1	3.6	15.85	13.20
<b>1 l/min</b>	1	0.01667	0.06	0.2642	0.22
<b>1 m<sup>3</sup>/h</b>	16.67	0.28	1	4.40	3.66
<b>1 US gal/min</b>	3.785	0.0631	0.227	1	0.8327
<b>1 Imp. gal./min</b>	4.546	0.076	0.273	1.201	1

##### ρ Change in specific weight


$\dot{V}_w = \frac{\dot{V}_R}{X}$	$\dot{V}_w =$ Flow rate (water) [l/min, l/h]
$\dot{V}_R = \dot{V}_w \sqrt{\frac{\rho_w}{\rho_R}} = \dot{V}_w \cdot X$	$\dot{V}_R =$ Flow rate of liquid, with a specific weight that differs from 1
$X = \sqrt{\frac{\rho_w}{\rho_R}}$	X = Multiplier ρ = Specific weight [kg/m <sup>3</sup> ]
$\frac{\rho_R}{X}$	500   600   700   800   900   1000   1100   1200
$\frac{\rho_R}{X}$	1.41   1.29   1.20   1.12   1.06   1.0   0.95   0.91
$\frac{\rho_R}{X}$	1300   1400   1500   1600   1700   1800   1900   2000
$\frac{\rho_R}{X}$	0.88   0.85   0.82   0.79   0.77   0.75   0.73   0.71

##### p/Ṃ Pressure/Flow rate

Valid for <b>single-fluid nozzles and rotating nozzles</b> except for axial-flow full cone nozzles	$\dot{V}_2 = \sqrt{\frac{p_2}{p_1}} \cdot \dot{V}_1$ [l/min]	Ratio of both, given and required pressure – flow rate values
	$p_2 = \left(\frac{\dot{V}_2}{\dot{V}_1}\right)^2 \cdot p_1$ [bar]	
Valid for <b>axial-flow full cone nozzles</b>	$\dot{V}_2 = \left(\frac{p_2}{p_1}\right)^{0.4} \cdot \dot{V}_1$ [l/min]	
	$p_2 = \left(\frac{\dot{V}_2}{\dot{V}_1}\right)^{2.5} \cdot p_1$ [bar]	

**All flow rate data of this brochure have been measured with water and consider the individual flow parameters of the nozzle designs.**

# WHAT YOU SHOULD KEEP IN MIND WHEN PLANNING

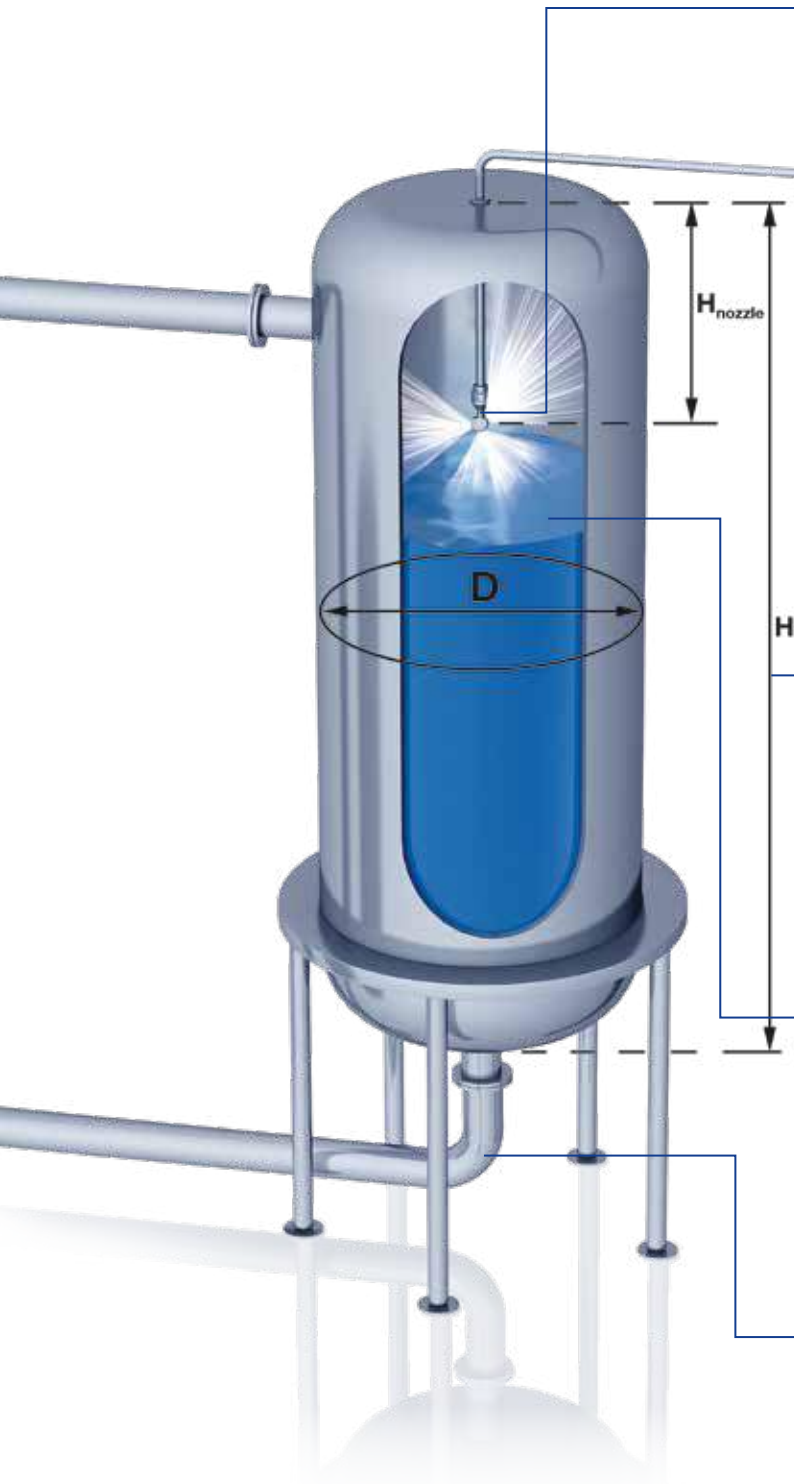

## Nozzle selection

The choice of the right Lechler rotating cleaning nozzle or static spray ball is determined primarily by the type of soil to be cleaned and the tank diameter. You can find this information on the product pages. It must be guaranteed that the diameter of the tank to be cleaned is smaller than the specified maximum possible tank diameter of the nozzles.

## Pump and pipes

The pipe size used depends mainly on the required flow rate and should be chosen so that the pressure losses in the pipe system are as low as possible. It must be guaranteed that the required static operating pressure is available directly at the nozzle. The pump power must be matched to this.

## Arrangement

The nozzles must be positioned in the upper part of the tank where possible. The following recommendation applies:

$$H_{\text{nozzle}} = 1/3 \cdot H_{\text{tank}}$$

In addition, it must be ensured that sufficient cleaning fluid strikes the tank top.

## Filling level

If possible, the nozzle should not come into contact with the product during production. The nozzle should be positioned above the maximum product level in the tank.

## Tank drainage rate

The tank drainage rate is to be selected to prevent the level of liquid from rising during the cleaning process. Make sure the drain can handle whatever volume you put into the tank. (See chart on the right.)

1"	23 l/min
1 1/2"	50 l/min
2"	87 l/min
2 1/2"	132 l/min
3"	190 l/min
4"	330 l/min

### Number of nozzles

When cleaning large tanks or complex installations, you will need to install several nozzles. The nozzles must be positioned for the spray jets to overlap. These nozzles effectively clean the tank surface area.



### Avoidance of spray shadows

Installations such as agitators, baffle plates or pipes prevent the areas behind them from being reached directly by the spray jet. Impact cleaning is not possible in these locations. For this reason, several nozzles must be installed if the tank contains equipment such as agitators or pipes. The number of nozzles should be chosen so that the spray shadows of the individual nozzles are eliminated. In addition, static spray nozzles can also be used for targeted removal of deposits left as a result of spray shadows or in areas that are difficult to clean.


# PERFECT FOR RELIABLE PLANNING

## TankClean SIMULATION SOFTWARE

Planing for a perfect clean tank can be a challenge. Many tanks have built-in equipment such as agitators or baffles which can create spray shadows. Whether a certain nozzle is able to reliably clean all surfaces of the tank under these conditions cannot be decided with certainty on the basis of just a visual inspection.

With our new and unique TankClean software, we can help you to find the optimum solution for perfectly cleaning your tank. To do this, we replicate the tank geometry in the software and then simulate the spraying operation. Operation of all Lechler tank cleaning nozzles can be simulated – from the static spray ball to the high-impact tank cleaning machine. The result of the simulation is documented and provided in a PDF or video file. Simulation with TankClean can already be used as the basis for optimum cleaning in the planning phase of new tanks, but is also suitable for optimizing existing tank cleaning processes.

### Our unique service – your individual benefit



#### Planning certainty

We assist you in planning your tank cleaning solution to ensure cleaning without any gaps.



#### Process optimization

By simulating the existing cleaning processes, we show you the optimization potentials for these processes.




#### Process reliability

Thanks to realistic and individually customized process simulation, we can offer you individual solution concepts.



#### Cost and time savings

Simulation makes it possible to detect any potential problem areas before final definition of the cleaning concept. This makes it possible to significantly reduce the number of time- and cost-intensive practical cleaning tests.

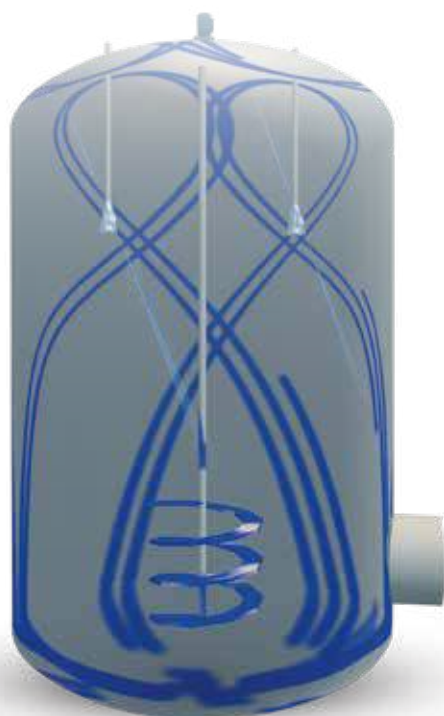

# TankClean



Function video

Scan the QR-code or go to:  
[www.lechler.com/tankclean](http://www.lechler.com/tankclean)





**Individual adaptation  
of tank geometries and  
built-in equipment**



**Selection of the right  
tank cleaning nozzles**



**Realistic simulation of  
the cleaning process**



**Documentation of the  
simulation results, including  
additional planning aids**



### Talk to us

Are you interested in tank cleaning simulations with TankClean? Ask your Lechler contact person for further information or give us a call. We will gladly help you in planning your tank cleaning solution.

# WHAT YOU SHOULD KEEP IN MIND WHEN PLANNING



## ⑤ Cleaning efficiency classes

Lechler precision nozzles for tank and equipment cleaning are divided into different cleaning efficiency classes. A distinction is made between five different cleaning efficiency classes.

The subdivision into cleaning efficiency classes 1–5 is intended to facilitate nozzle selection for users. These classes make it possible to find the right nozzle for the respective application.

Every nozzle from Lechler is assigned to a class. The respective class is suitable for specific cleaning tasks.

First, the required cleaning efficiency class is defined on the basis of the soil type – rinsing, light to medium soil, persistent soil. Several classes are generally always suitable for one type of soiling. It is not possible or expedient to differentiate exactly between the soil types or recommended nozzle types since there are a large number of different applications. The information should be seen as recommendations intended to make it easier to choose the right nozzle.

If your application is to clean a non-adhering powder material from a tank surface, for example, the cleaning task can be defined as “rinsing”.

The nozzle series in cleaning efficiency class 1, e.g. static spray ball, or class 2, e.g. »MicroWhirly« or »MiniSpinner«, are suitable for this.

In the next step, the maximum possible tank diameter and the flow rate range of the individual series are considered. Lechler static spray balls are very economical. For cleaning medium soil, Lechler MicroSpinners or MiniSpinners are recommended.

However, it is also possible that there will be no nozzle series from the two cleaning efficiency classes that is suitable at first sight in the case of very large tanks. To check this, it is recommended to refer to the overview page of the respective cleaning efficiency class. Using the number line, it is possible to see at a glance whether there is a suitable series for

the specific tank diameter in the corresponding cleaning efficiency class. The following possibilities exist if there is no recommended series for the required tank diameter:


- Several nozzles are positioned in the tank so that the distance between nozzle and tank is within the required dimensions.
- By referring to the overview pages of the different cleaning efficiency classes, choose a suitable nozzle series for the respective tank diameter.

### Static cleaning nozzles

In addition to the classes described above, there is also an additional subdivision into static cleaning nozzles. These include flat fan or full cone nozzles, for example. These can be used for the shadowing effect to provide complete spray coverage.



# RELIABLE RINSING OF TANKS AND EQUIPMENT INSTALLATIONS

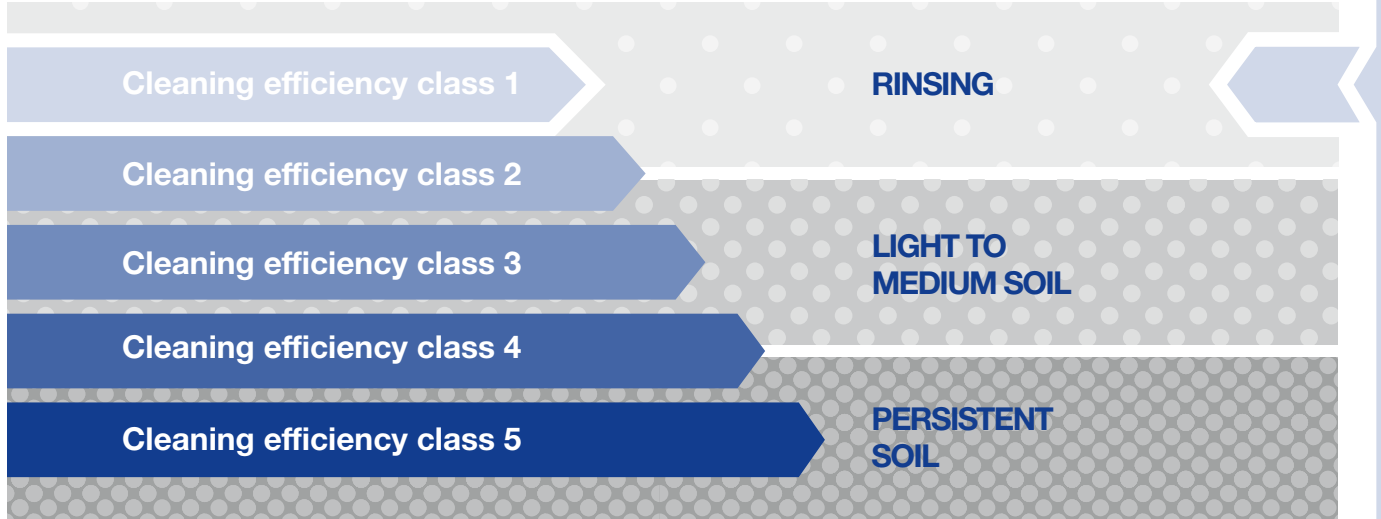

1  
Cleaning efficiency class

## Cleaning efficiency class 1


These static spray balls of cleaning efficiency class 1 are designed for hygienic rinsing with a flow rate of 15 to 670 l/min at 2 bar, as is frequently required in the food and beverage industry. In addition to liquid media, the static spray balls can also be operated with media such as steam and air and therefore


are especially suitable for SIP cleaning (Sterilization in Place).

Lechler products in this class are also designed for operation at higher temperatures and guarantee high process reliability.



 **Operating principles**  
Static

 **Flow rates at 2 bar**  
15 to 670 l/min

 **Recommended operating pressures**  
1.5 to 3 bar

 **Max. temperatures**  
to 200 °C



# Static spray balls Series 527

## Series 527

The 3-A certification also makes the products of series 527 suitable for areas with the highest of hygiene requirements. They clean with powerful solid jets, have a high surface quality and are also reliably resistant to high temperatures.



	<b>Max. tank diameter [m]</b>	0	1	2	3	4	5	6	7	8	9
--	-------------------------------	---	---	---	---	---	---	---	---	---	---



**Material**  
316L SS




**Max. temperature**  
200 °C



**Recommended operating pressure**  
1.5 bar




**Installation**  
Operation in every direction is possible

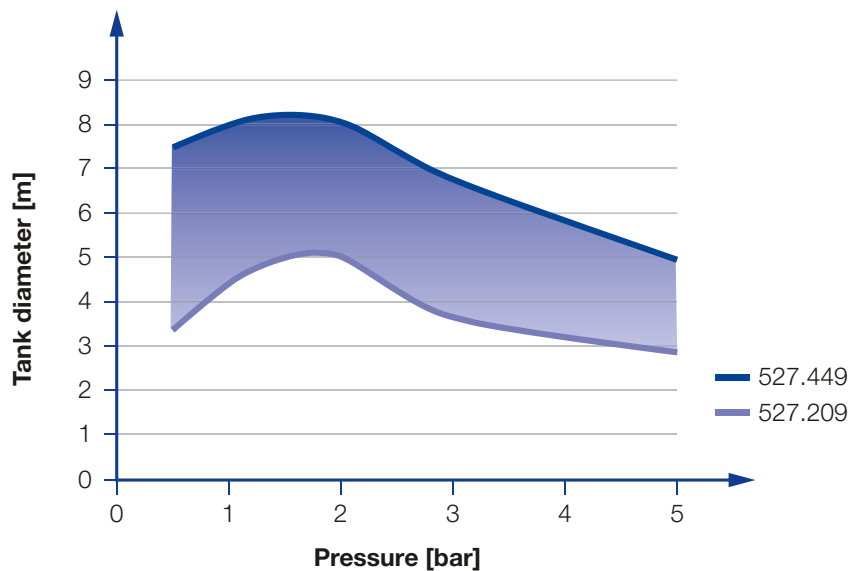



Overview of the tank diameter, depending upon the pressure of series 527





Dimensions slip-on connection according to ASME-BPE (OD-tube)

Spray angle 	Ordering number Type	E Ø [mm]	$\dot{V}$ [l/min]					Dimensions approx. [mm]					Max. tank diameter [m]
			p [bar] ( $p_{\max} = 5$ bar)					Height H	Ø D	Ø B	Ø C	Ø A	
			1	2	3	5	at 40 psi [US gal/min]						
	527.209.1Y.00.75	0.8	42	60	73	95	19	68	32	19.0	3.3	12.7	5.2
	527.289.1Y.01.50	1.1	120	170	208	269	50	116	65	38.3	4.9	25.4	6.0
	527.449.1Y.02.00	1.7	297	420	514	664	127	152	102	51.0	4.9	25.4	8.2

E = narrowest free cross-section

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

### Information on operation

In most applications, static spray balls do not deliver the same cleaning power as rotating nozzles, anyway they do have advantages that make them indispensable for certain tasks:

- No moving parts
- Self-draining
- Easy to inspect
- Proven use in hygienically sensitive environments

Should a rotating nozzle stop turning for some reason, parts of the tank may remain uncleaned. This cannot happen with spray balls. However, gaps can occur in the spray pattern if individual openings are blocked with soil.

Compared to rotating nozzles, static spray balls usually need two to three times the amount of liquid.

### Slip-on information


- R-clip made of 316L SS is included.
- Depending on diameter of the adapter the flow rate can increase due to leakage between connecting pipe and static spray ball.



# Static spray balls Series 540/541

## Series 540/541

The robust series 540/541 have a threaded connection and an especially compact design. They can also be used at high temperatures as well as for the output of steam and air.

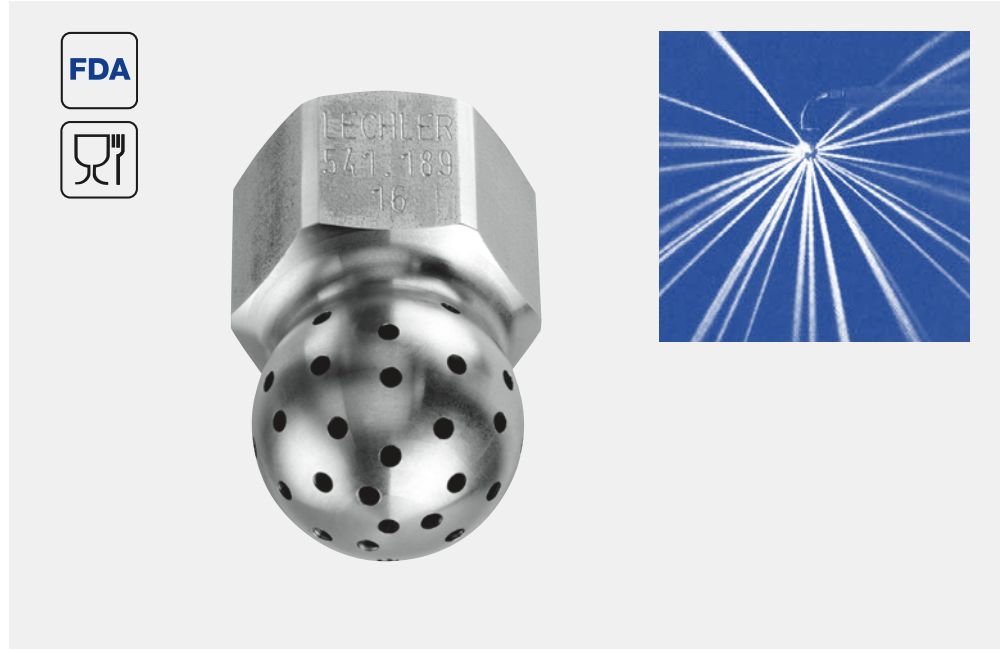

**Max. tank diameter [m]**



**Material**  
303 SS




**Max. temperature**  
200 °C




**Recommended operating pressure**  
3 bar



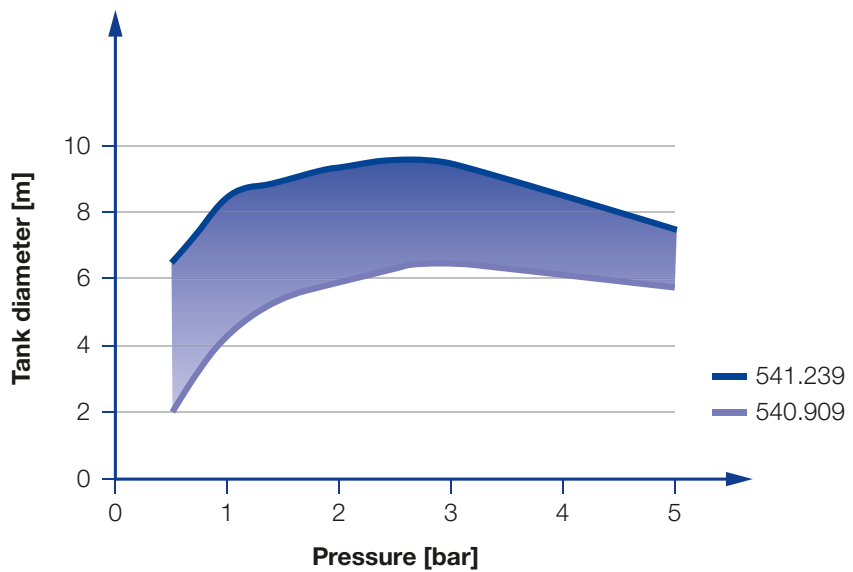

**Installation**  
Operation in every direction is possible

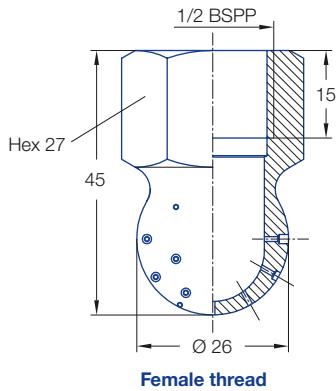

Overview of the tank diameter, depending upon the pressure of series 540/541



Spray angle 	Ordering number Type	E Ø [mm]	$\dot{V}$ [l/min]					Max. tank diameter [m]
			p [bar] ( $p_{max} = 10$ bar)					
			0.5	1	2	3	at 40 psi [US gal/min]	
	<b>540.909.16</b>	0.8	9	13	18	22	6	6.5
	<b>540.989.16</b>	1.0	14	20	28	34	9	7.0
	<b>541.109.16</b>	1.5	29	40	57	70	18	7.5
	<b>541.189.16</b>	2.0	45	64	90	110	28	8.3
	<b>541.239.16</b>	2.3	59	83	118	145	37	9.5

E = narrowest free cross-section · NPT on request

**The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.**

### Information on operation

In most applications, static spray balls do not deliver the same cleaning power as rotating nozzles, anyway they do have advantages that make them indispensable for certain tasks:

- No moving parts
- Self-draining
- Easy to inspect
- Proven use in hygienically sensitive environments

Should a rotating nozzle stop turning for some reason, parts of the tank may remain uncleaned. This cannot happen with spray balls. However, gaps can occur in the spray pattern if individual openings are blocked with soil.


Compared to rotating nozzles, static spray balls usually need two to three times the amount of liquid.



# Static spray balls »RinseClean« Series 5B2/5B3

## Series 5B2/5B3

The spray ball design has proven itself in many applications. It can be used in areas with high hygienic requirements and high temperatures. Our RinseClean spray ball is available with various slip-on connections, as well as in threaded or welded versions.

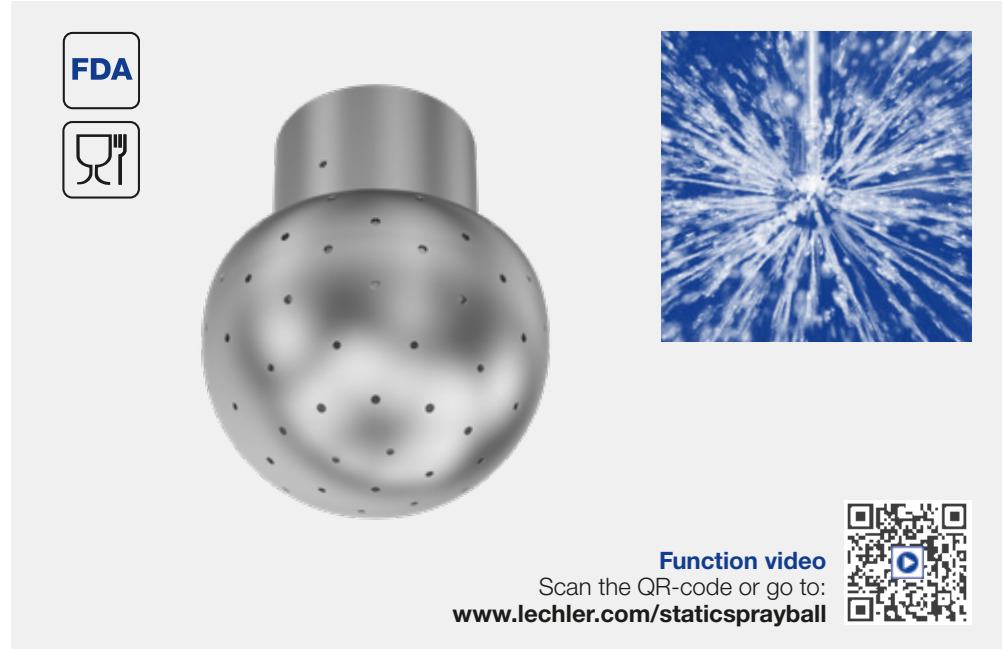


	<b>Max. tank diameter [m]</b>	0	1	2	3	4	5	6	7	8	9
--	-------------------------------	---	---	---	---	---	---	---	---	---	---

**Material**  
316L SS,  
Pin: 316L SS

**Max. temperature**  
200 °C

**Recommended operating pressure**  
2 bar


**Installation**  
Operation in every direction is possible

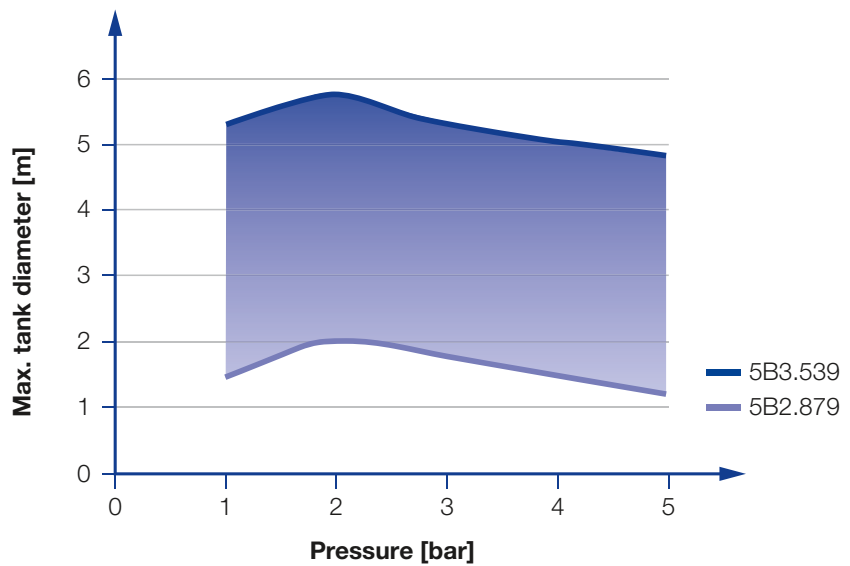


Overview of the tank diameter, depending upon the pressure of series 5B2/5B3



### Connection options

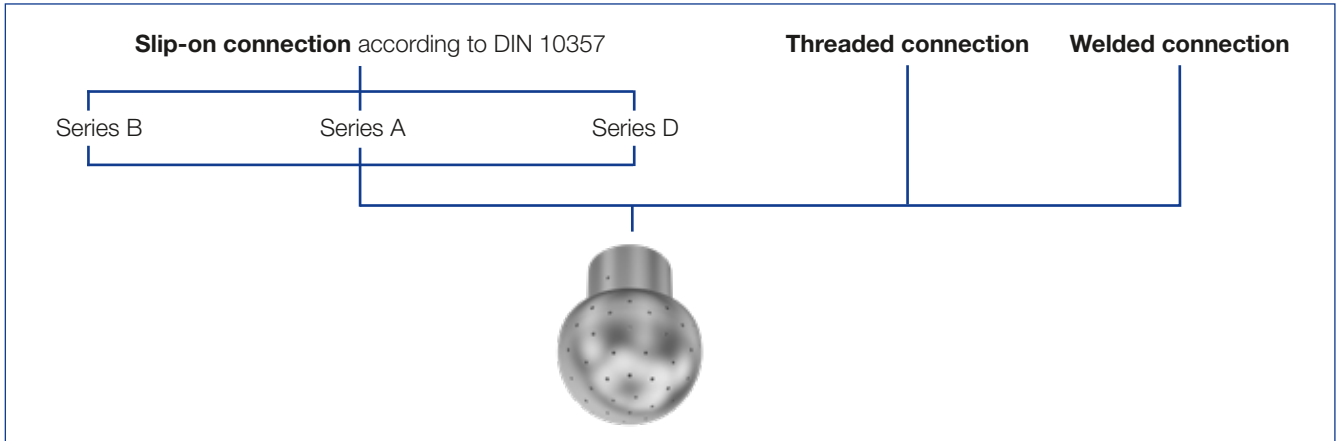


### Slip-on connection



Dimensions slip-on connection according to DIN 10357



Pin 1



Pin 2-5

With the slip-on connection, the spray ball is pushed onto the customer's connection pipe and secured with the supplied cotter pin. Lechler offers the right connection sizes for the three most common pipe standards.

Pin	Ordering no.
1	095.013.1Y.06.55.0
2	095.013.1Y.06.58.0
3	095.013.1Y.06.56.0
4	095.013.1Y.06.59.0
5	095.013.1Y.06.57.0

### Slip-on connection according to DIN EN 10357 series B (replaces DIN 11850 series 1)

Spray angle	Ordering no. Type	E Ø [mm]	$\dot{V}$ [l/min]					Dimensions [mm]					Max. tank diameter [m]	
			p [bar] ( $p_{max} = 5$ bar)					Ø D	Height H	Con- nection Ø B	Ø C	Distance to bore hole A		Pin
			0.5	1	2	3	at 40 psi [US gal/min]							
360° 	5B2.879.1Y.D0.80	0.8	8	11	15	18	4.7	20	37	8.2	2.2	9	1	2.0
	5B3.089.1Y.D1.20	1.0	25	35	50	61	15.5	28	42	12.2	2.2	9	1	2.2
	5B3.139.1Y.D1.20	1.6	33	46	65	80	20.2	28	42	12.2	2.2	9	1	2.3
	5B3.209.1Y.D1.80	1.5	50	71	100	123	31.0	28	42	18.2	2.2	9	1	2.5
	5B3.309.1Y.D2.20	1.7	90	127	180	221	55.8	64	84	22.2	2.2	18	2	3.5
	5B3.379.1Y.D2.80	2.1	130	184	260	318	80.7	64	84	28.2	2.2	18	3	5.2
	5B3.389.1Y.D4.00	2.1	140	198	280	343	86.9	64	84	40.3	2.2	18	4	5.2
	5B3.409.1Y.D3.40	2.3	160	226	320	392	99.3	64	84	34.2	2.2	18	4	5.2
	5B3.449.1Y.D2.80	3.0	205	290	410	502	127.2	64	84	28.2	2.2	18	3	5.4
	5B3.489.1Y.D3.40	2.9	255	361	510	625	158.2	64	84	34.2	2.2	18	4	5.5
5B3.499.1Y.D4.00	2.8	270	382	540	661	167.5	64	84	40.3	2.2	18	4	5.5	
5B3.539.1Y.D5.20	3.2	335	474	670	821	207.8	90	111	52.3	3.0	25	5	5.6	
180° 	5B3.083.1Y.D1.80	1.2	25	35	50	61	15.5	28	42	18.2	2.2	9	1	2.2
	5B3.253.1Y.D2.20	1.8	65	92	130	159	40.3	64	84	22.2	2.2	18	2	3.0
	5B3.323.1Y.D2.80	2.3	100	141	200	245	62.0	64	84	28.2	2.2	18	3	3.5
	5B3.463.1Y.D5.20	3.3	230	325	460	563	142.7	90	111	52.3	3.0	25	5	5.4
180° 	5B3.114.1Y.D1.80	1.4	30	42	60	74	18.6	28	42	18.2	2.2	9	1	2.2
	5B3.274.1Y.D2.20	2.3	75	106	150	184	46.5	64	84	22.2	2.2	18	2	3.0
	5B3.394.1Y.D2.80	3.0	145	205	290	355	90.0	64	84	28.2	2.2	18	3	5.0
	5B3.444.1Y.D5.20	3.2	200	283	400	490	124.1	90	111	52.3	3.0	25	5	5.2


E = narrowest free cross-section

Continued on next page.



# Static spray balls »RinseClean« Series 5B2/5B3

## Slip-on connection

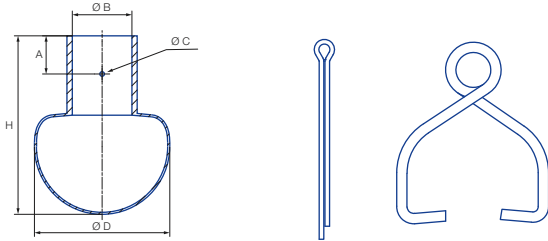



Dimensions slip-on connection according to DIN 10357

Pin 1

Pin 2-5



## Slip-on connection according to DIN EN 10357 series A (replaces DIN 11850 series 2)

Spray angle 	Ordering no.	E Ø [mm]	V̇ [l/min]					Dimensions [mm]						Max. tank diameter [m]
	Type		p [bar] (p <sub>max</sub> = 5 bar)					Ø D	Height H	Con- nection B	Ø C	Distance to bore hole A	Pin	
			0.5	1	2	3	at 40 psi [US gal/min]							
360° 	<b>5B3.149.1Y.D2.90</b>	0.9	35	50	70	86	21.7	64	84	29.2	2.2	18	3	2.3
	<b>5B3.299.1Y.D2.90</b>	1.5	83	117	165	202	51.2	64	84	29.2	2.2	18	3	3.2
	<b>5B3.359.1Y.D2.90</b>	1.9	115	163	230	282	71.3	64	84	29.2	2.2	18	3	5.0
	<b>5B3.399.1Y.D2.90</b>	2.2	150	212	300	367	93.1	64	84	29.2	2.2	18	3	5.2
	<b>5B3.429.1Y.D2.90</b>	2.6	180	255	360	441	111.7	64	84	29.2	2.2	18	3	5.2
	<b>5B3.539.1Y.D5.30</b>	3.2	335	474	670	821	207.8	90	111	53.3	3.0	25	5	5.6

E = narrowest free cross-section

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

## Slip-on connection according to DIN EN 10357 series D (ASME BPE 1997, OD-tube compatible)

Spray angle 	Ordering no.	E Ø [mm]	V̇ [l/min]					Dimensions [mm]						Max. tank diameter [m]
	Type		p [bar] (p <sub>max</sub> = 5 bar)					Ø D	Height H	Con- nection B	Ø C	Distance to bore hole A	Pin	
			0.5	1	2	3	at 40 psi [US gal/min]							
360° 	<b>5B3.089.1Y.A1.00</b>	1.0	25	35	50	61	15.5	28	42	9.8	2.2	9	1	2.2
	<b>5B3.209.1Y.A1.90</b>	1.5	50	71	100	123	31.0	28	42	19.3	2.2	9	1	2.5
	<b>5B3.309.1Y.A1.90</b>	1.7	90	127	180	221	55.8	64	84	19.3	2.2	18	1	3.5
	<b>5B3.379.1Y.A2.60</b>	2.1	130	184	260	318	80.7	64	84	25.6	2.2	18	3	5.2
	<b>5B3.449.1Y.A3.80</b>	3.0	205	290	410	502	127.2	64	84	38.3	2.2	18	4	5.4
	<b>5B3.539.1Y.A5.10</b>	3.2	335	474	670	821	207.8	90	111	51.1	3.0	25	5	5.6


E = narrowest free cross-section

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.


## Slip-on information

- Pin made of 316L SS is included.
- Depending on diameter of adapter, the flow rate can increase due to leakage between connecting pipe and static spray ball.

## Threaded connection




### Threaded connection

Spray angle	Ordering no.	Con- nection BSPP	E Ø [mm]	V̇ [l/min]					Dimensions [mm]			Max. tank diameter [m]
	Type			p [bar] (p <sub>max</sub> = 5 bar)					Ø D	Height H	Screw-in length T	
				0.5	1	2	3	at 40 psi [US gal/min]				
360° 	<b>5B2.879.1Y.AA.00</b>	1/8 A	0.8	8	11	15	18	4.7	20	37	8	2.0
	<b>5B3.309.1Y.AH.00</b>	1/2	1.9	90	127	180	221	55.8	64	84	14	3.5
	<b>5B3.379.1Y.AN.00</b>	1	2.1	130	184	260	318	80.7	64	84	18	5.2
	<b>5B3.539.1Y.AW.00</b>	2	3.1	335	474	670	821	207.8	90	111	24	5.6


E = narrowest free cross-section

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

## Welded connection



### Welded connection according to ISO 2037

Spray angle	Ordering no.	E Ø [mm]	V̇ [l/min]					Dimensions [mm]			Max. tank diameter [m]
	Type		p [bar] (p <sub>max</sub> = 5 bar)					Ø D	Height H	Dimensions of the connection piece	
			0.5	1	2	3	at 40 psi [US gal/min]				
360° 	<b>5B2.879.1Y.W1.20</b>	0.8	8	11	15	18	4.7	20	37	OD 12 ID 10	2.0
	<b>5B3.089.1Y.W1.20</b>	1.0	25	35	50	61	15.5	28	42	OD 12 ID 10	2.2
	<b>5B3.209.1Y.W1.70</b>	1.5	50	71	100	123	31.0	28	42	OD 17.2 ID 15.2	2.5
	<b>5B3.309.1Y.W2.50</b>	1.7	90	127	180	221	55.8	64	84	OD 25 ID 22.6	3.5
	<b>5B3.379.1Y.W2.50</b>	2.1	130	184	260	318	80.7	64	84	OD 25 ID 22.6	5.2
	<b>5B3.449.1Y.W3.80</b>	3.0	205	290	410	502	127.2	64	84	OD 38 ID 35.6	5.4

E = narrowest free cross-section

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.



# PERFECT RINSING AND REMOVAL OF LIGHT SOILING



## Cleaning efficiency class 2


The typical task profile of the rotating nozzles in cleaning efficiency class 2 includes rinsing tasks and the removal of light soiling, particularly the kind that frequently occurs in the food and beverage industry as well as in the chemical and pharmaceutical industry.


The Lechler products in this class are free-spinning and made from particularly high-grade materials such as stainless steel, PVDF, PEEK and PTFE. This ensures the use of a wide range of different cleaning agents.




	<b>Max. tank diameter [m]</b>	0	1	2	3	4	5	6	7	8	9
---	-------------------------------	---	---	---	---	---	---	---	---	---	---

 **Operating principles**  
Free-spinning

 **Flow rates at 2 bar**  
8 to 225 l/min

 **Recommended operating pressures**  
2 to 3 bar

 **Max. temperatures**  
50 to 200 °C





# Rotating cleaning nozzle »PicoWhirly« Series 500.234

## Series 500.234

The PicoWhirly works with rotating solid jets and is also suitable for cleaning at very high temperatures. This rotating cleaning nozzle with kolsterised slide bearing is made entirely from stainless steel and can also be used in very small spaces, thanks to its extremely compact construction.



	<b>Max. tank diameter [m]</b>	0	1	2	3	4	5	6	7	8	9
--	-------------------------------	---	---	---	---	---	---	---	---	---	---



**Material**  
316L SS



**Max. temperature**  
200 °C



**Recommended operating pressure**  
3 bar




**Installation**  
Operation in every direction is possible




**Filtration**  
Line strainer with a mesh size of 0.3 mm/50 mesh



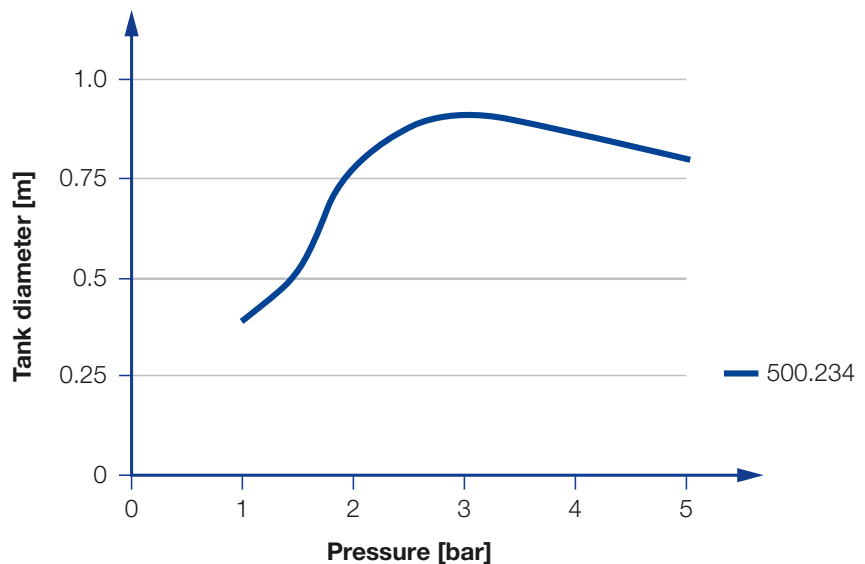

**Bearing**  
Kolsterised slide bearing

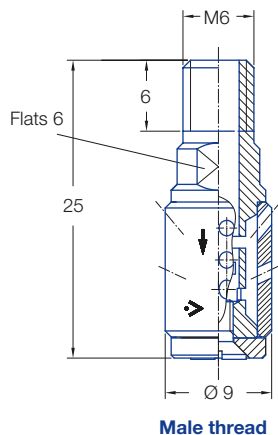

Overview of the tank diameter, depending upon the pressure of series 500.234



Spray angle 	Ordering number Type	E Ø [mm]	V̇ [l/min]				Max. tank diameter [m]
			p [bar] (p <sub>max</sub> = 5 bar)				
			1	2	3	at 40 psi [US gal/min]	
300° 	<b>500.234.G9.00</b>	1.8	5.7	8.0	9.8	2.5	0.9

E = narrowest free cross-section

**The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.**

### Information on operation

- Operation with compressed air only for short-term usage. Operation above the recommended operating pressure has negative effects on the cleaning result and wear.



# Rotating cleaning nozzle »MicroWhirly« Series 566

## Series 566

The MicroWhirly, with effective flat fan nozzles, is licensed for contact with food. Thanks to the robust slide bearing made from PEEK, the MicroWhirly has a particularly long service life. The MicroWhirly is alternatively available with an internal or external thread and in an ATEX version, which allows it to be adapted to a wide range of uses.



**Function video**  
Scan the QR-code or go to:  
[www.lechler.com/microwhirly](http://www.lechler.com/microwhirly)



**Max. tank diameter [m]**

0	1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---	---



**Materials**  
316L SS, PEEK,  
PEEK ESD (ATEX  
version only)



**Max. temperature**  
130 °C  
90 °C ATEX Version



**Recommended operating pressure**  
2 bar




**Installation**  
Operation in every  
direction is possible




**Filtration**  
Line strainer with  
a mesh size of  
0.3 mm/50 mesh




**Bearing**  
Slide bearing made of  
PEEK

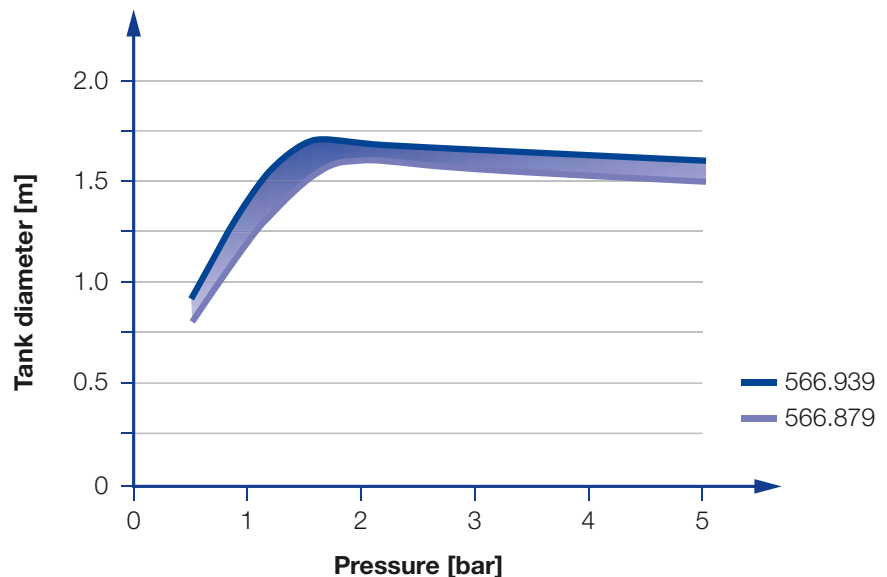


Overview of the tank diameter, depending upon the pressure of series 566

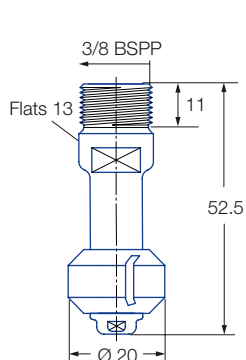

Male thread

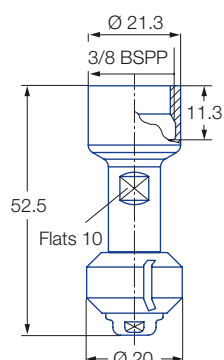

Female thread

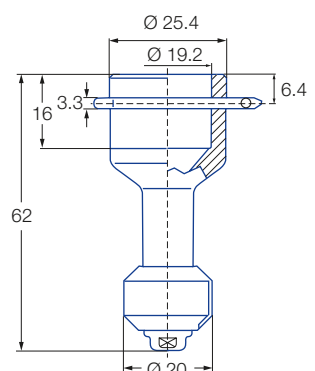

Dimensions slip-on connection according to ASME-BPE (OD-tube)

Spray angle	Ordering number				E Ø [mm]	V̇ [l/min]				Max. tank diameter [m]
	Type	Connection				p [bar] (p <sub>max</sub> = 6 bar)				
		3/8 BSPP* male	3/8 BSPP* female	3/4" Slip-on		1	2	3	at 40 psi [US gal/min]	
180° 	566.873.1Y	AE	AF	TF	1	12	15	18	5	1.6
	566.933.1Y	AE	AF	TF	2.4	15	21	26	7	1.7
180° 	566.874.1Y	AE	AF	TF	1	12	15	18	5	1.6
	566.934.1Y	AE	AF	TF	2.4	15	21	26	7	1.7
360° 	566.879.1Y	AE	AF	TF	1	12	15	18	5	1.6
	566.939.1Y	AE	AF	TF	2.4	15	21	26	7	1.7

E = narrowest free cross-section · \* NPT and weld-on version on request

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

### Information on operation

- Operation with compressed air only for short-term usage. Operation above the recommended operating pressure has negative effects on the cleaning result and wear.

### Slip-on information

- R-clip made of 316L SS is included (Ordering no.: 095.022.1Y.50.94.E).
- Depending on diameter of the adapter the flow rate can increase due to leakage between connecting pipe and rotating cleaning nozzle.

**Example of ordering with ATEX approval. No FDA and (EC) 1935/2004 conformity.**

Unit group/category/zones:

II 1G Ex h IIB T6...T3 Ga

II 1D Ex h IIIC T85 °C...T150 °C Da

Example    Type                    + Connection = Ordering no.  
of ordering: 566.873.1Y.XX.EX + AE                    = 566.873.1Y.AE.EX

**Example of ordering with FDA and (EC) 1935/2004 conformity.**

All Materials are suitable for contact with food.



Example    Type                    + Connection = Ordering no.  
of ordering: 566.873.1Y.XX + AE                    = 566.873.1Y.AE

**ATTENTION:** For the **ATEX** version of the slip-on connection the code for the connection changes. For a 566.873.1Y.**TF.07** with ATEX the order number changes to 566.873.1Y.**TF.EX**



# Rotating cleaning nozzle »MiniWhirly« Series 500.186

## Series 500.186

The MiniWhirly made from POM is the economical entry-level model in the area of tank cleaning. The rotating nozzle has effective flat fan nozzles and was specifically designed for applications in barrel and canister cleaning.



**Max. tank diameter [m]**

0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9



**Materials**

POM,  
316 SS



**Max. temperature**

50 °C



**Recommended operating pressure**

2 bar



**Installation**

Vertically facing downward




**Filtration**

Line strainer with a mesh size of 0.3 mm/50 mesh




**Bearing**

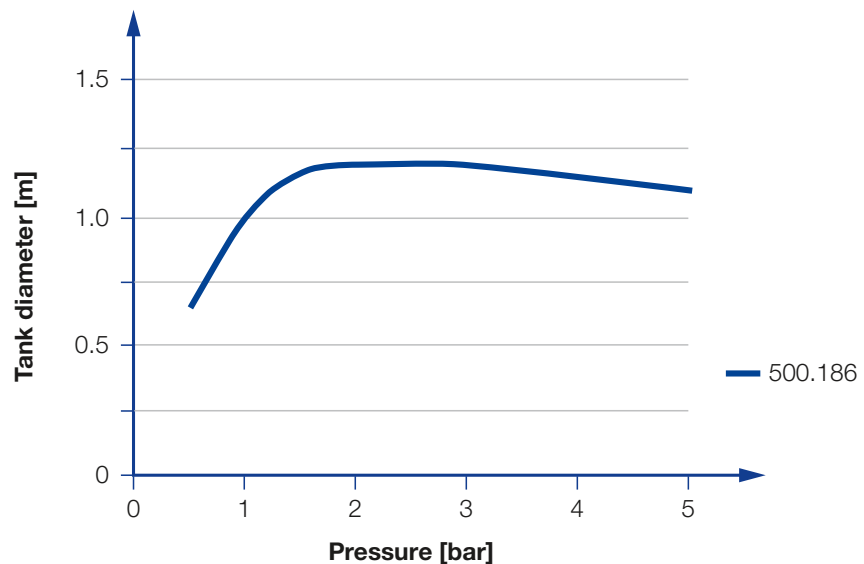

Ball bearing made of stainless steel

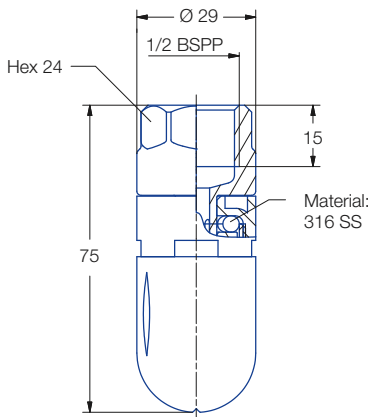

Overview of the tank diameter, depending upon the pressure of series 500.186



Female thread

Spray angle 	Ordering number Type	E $\text{Ø}$ [mm]	$\dot{V}$ [l/min]				Max. tank diameter [m]
			p [bar] ( $p_{\text{max}} = 5 \text{ bar}$ )				
			1	2	3	at 40 psi [US gal/min]	
300° 	<b>500.186.56.AH</b>	1.9	13	18	22	6	1.3

E = narrowest free cross-section

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

### Information on operation

- Operation with compressed air only for short-term usage. Operation above the recommended operating pressure has negative effects on the cleaning result and wear.





# Rotating cleaning nozzle »PVDF MicroWhirly« Series 500.191

## Series 500.191

The PVDF MicroWhirly is made entirely from PVDF and designed to work in a corrosive environment. It is also suitable for contact with food and the application of foam, and can be used for cleaning equipment – all for a very good price-performance ratio.



**Max. tank diameter[m]**



**Material**  
PVDF



**Max. temperature**  
90 °C



**Recommended operating pressure**  
2 bar




**Installation**  
Operation in every direction is possible




**Filtration**  
Line strainer with a mesh size of 0.3 mm/50 mesh



**Bearing**  
Slide bearing made of PVDF

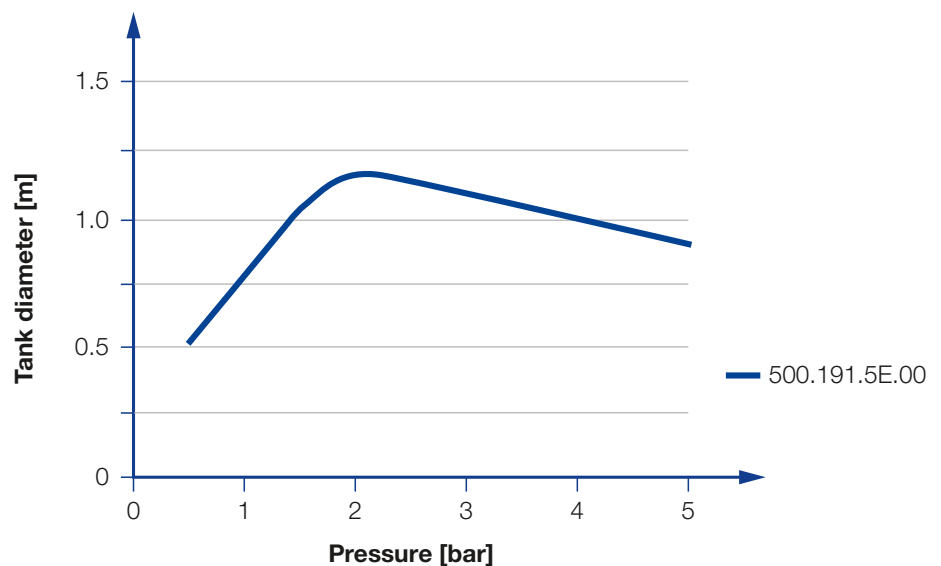






Overview of the tank diameter, depending upon the pressure of series 500.191

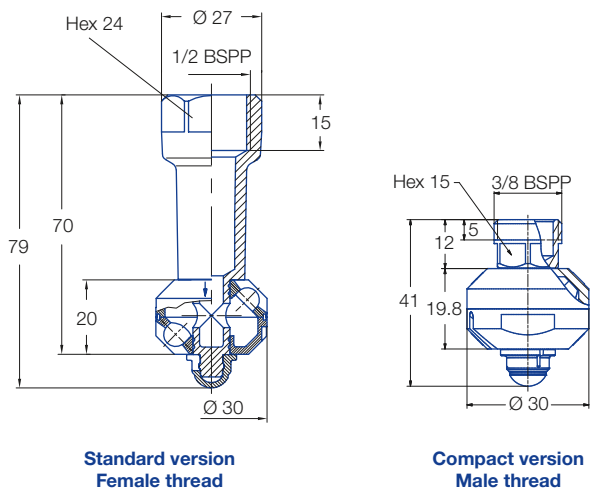

**Standard version**  
Female thread

**Compact version**  
Male thread




**Standard version**

Spray angle 	Ordering number Type	E Ø [mm]	Connection BSPP female	V̇ [l/min]				Max. tank diameter [m]
				p [bar] (p <sub>max</sub> = 5 bar)				
				1	2	3	at 40 psi [US gal/min]	
180° 	<b>500.191.5E.02</b>	2.2	1/2"	9	13	16	4	0.8
180° 	<b>500.191.5E.01</b>	2.2	1/2"	9	13	16	4	0.8
270° 	<b>500.191.5E.31</b>	2.2	1/2"	14	20	25	6	1.1
360° 	<b>500.191.5E.00</b>	2.2	1/2"	14	20	25	6	1.1

E = narrowest free cross-section

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

**Compact version**

Spray angle 	Ordering number Type	E Ø [mm]	Connection BSPP male	V̇ [l/min]				Max. tank diameter [m]
				p [bar] (p <sub>max</sub> = 5 bar)				
				1	2	3	at 40 psi [US gal/min]	
180° 	<b>500.191.5E.21</b>	2.2	3/8"	9	13	16	4	0.8
360° 	<b>500.191.5E.22</b>	2.2	3/8"	14	20	25	6	1.1

E = narrowest free cross-section

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

**Information on operation**

- The PVDF MicroWhirly is not suitable for operation with compressed air or any other gas. Operation above the recommended operating pressure has negative effects on the cleaning result and wear.



# Rotating cleaning nozzle »NanoSpinner« Series 5NA

## Series 5NA

The NanoSpinner convinces by its compact design which allows the cleaning in confined spaces. In addition, the rotating cleaning nozzle is characterized by a popular design and its double ball bearing. It is made entirely from stainless steel and designed for use also at high temperatures.



	<b>Max. tank diameter [m]</b>	0	1	2	3	4	5	6	7	8	9
--	-------------------------------	---	---	---	---	---	---	---	---	---	---

**Material**  
316L SS, 440C SS


**Max. temperature**  
140 °C

**Recommended operating pressure**  
2 bar


**Installation**  
Operation in every direction is possible



**Filtration**  
Line strainer with a mesh size of 0.1 mm/170 mesh

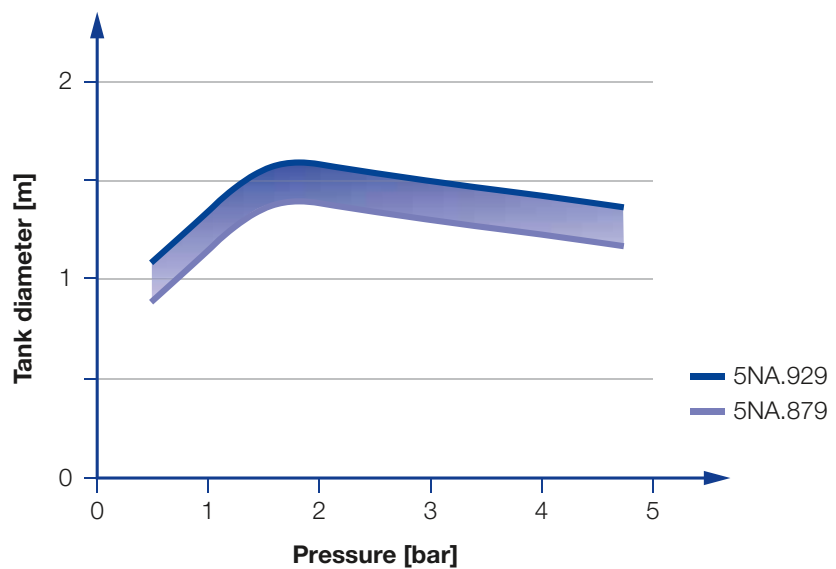**Bearing**  
Double ball bearing made of 440C SS

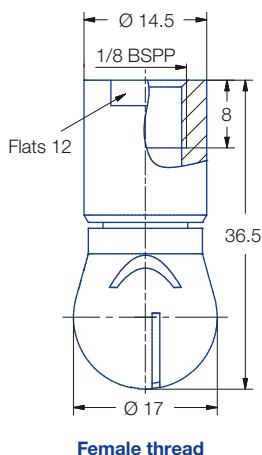

Overview of the tank diameter, depending upon the pressure of series 5NA



Spray angle 	Ordering number Type	E Ø [mm]	V̇ [l/min]				Max. tank diameter [m]
			p [bar] (p <sub>max</sub> = 5 bar)				
			1	2	3	at 40 psi [US gal/min]	
360° 	<b>5NA.879.1Y.AB</b>	0.5	11	15	18	5	1.4
	<b>5NA.929.1Y.AB</b>	0.5	14	20	25	6	1.6

E = narrowest free cross-section


The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.


### Information on operation



- Operation with compressed air only for short-term usage. Operation above the recommended operating pressure has negative effects on the cleaning result and wear.

**Example of ordering with ATEX approval. No FDA and (EC) 1935/2004 conformity.**

**Unit group/category/zones:**

 II 1G Ex h IIB T6...T3 Ga



 II 1D Ex h IIIC T85 °C...T200 °C Da

**Example of ordering:** Type/Ordering no. **5NA.879.1Y.AB.EX**

**Example of ordering with FDA and (EC) 1935/2004 conformity.**

**All Materials are suitable for contact with food.**

**Example of ordering:** Type/Ordering no. **5NA.879.1Y.AB**



# Rotating cleaning nozzle »MicroSpinner« Series 5MC

## Series 5MC

The innovative slot design gives the MicroSpinner its high degree of effectiveness. Due to the modern bearing construction, it is particularly reliable and durable. The MicroSpinner is made entirely from stainless steel and designed for use also at high temperatures. Apart from stainless steel, it is also available in Hastelloy and in many flow rates.



	<b>Max. tank diameter [m]</b>	0	1	2	3	4	5	6	7	8	9
--	-------------------------------	---	---	---	---	---	---	---	---	---	---

**Materials**  
316L SS, 440C SS  
Hastelloy C22,  
Hastelloy C276


**Max. temperature**  
140 °C

**Recommended operating pressure**  
2 bar


**Installation**  
Operation in every direction is possible

**Filtration**  
Line strainer with a mesh size of 0.1 mm/170 mesh

**Bearing**  
Double ball bearing made of 440C SS  
Double ball bearing made of C276

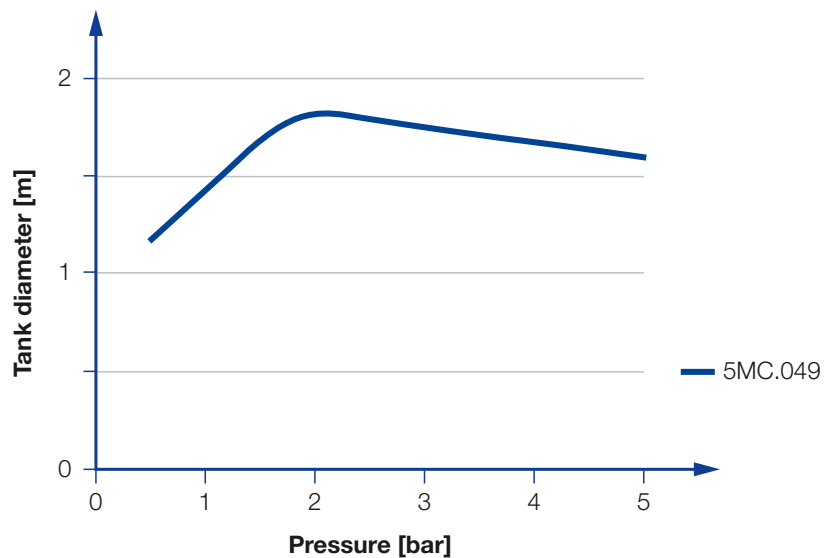



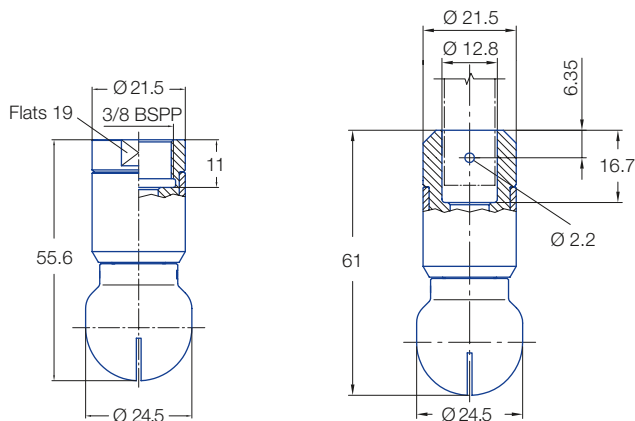

Overview of the tank diameter, depending upon the pressure of series 5MC



Female thread

Dimensions slip-on connection according to ASME-BPE (OD-tube)

Spray angle 	Ordering number					E Ø [mm]	V̇ [l/min]				Max. tank diameter [m]
	Type	Mat. no.		Connection			p [bar] (p <sub>max</sub> = 5 bar)				
		1Y 316L SS	21 Hastelloy C22	3/8 BSPP	1/2" Slip-on		1	2	3	at 40 psi [US gal/min]	
60° 	5MC.022	○	○	AF	TF05	1.0	16	23	28	7	-
	5MC.042	○	○	AF	TF05	3.0	28	40	49	12	-
180° 	5MC.004	○	○	AF	TF05	0.8	22	32	39	10	1.8
360° 	5MC.969	○	○	AF	TF05	0.9	18	25	31	8	1.7
	5MC.049	○	○	AF	TF05	0.9	28	39	48	12	1.8

E = narrowest free cross-section  
NPT, more slip-on sizes and weld-on versions on request

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

### Information on operation


- Operation with compressed air only for short-term usage. Operation above the recommended operating pressure has negative effects on the cleaning result and wear.


### Slip-on information


- R-clip is included.  
Mat. no. 1Y: R-clip made of 316L SS (Ordering no. 095.013.1E.05.59).  
Mat. no. 21: R-clip made of Hastelloy C22 (Ordering no. 095.013.21.06.03)
- Depending on diameter of the adapter the flow rate can increase due to leakage between connecting pipe and rotating cleaning nozzle.


**Example of ordering with ATEX approval. FDA and (EC) 1935/2004 conform.**  
Only material 316L SS available with ATEX approval.

**Unit group/category/zones:**

 II 1G Ex h IIB T6...T3 Ga

 II 1D Ex h IIIC T85 °C...T200 °C Da







**Example of Ordering:** Type + Mat. no. + Connection = Ordering no.  
5MC.022 + 1Y + AF = 5MC.022.1Y.AF.EX

**Example of ordering with FDA and (EC) 1935/2004 conformity.**

**All Materials are suitable for contact with food.**





**Example of Ordering:** Type + Mat. no. + Connection = Ordering no.  
5MC.022 + 1Y + AF = 5MC.022.1Y.AF





# Rotating cleaning nozzle »MiniSpinner« Series 5MI

## Series 5MI

The innovative slot design gives the MiniSpinner its high degree of effectiveness. Due to the modern bearing construction, it is particularly reliable and durable. The MiniSpinner is made entirely from stainless steel and designed for use also at high temperatures. Apart from stainless steel, it is also available in Hastelloy and in many flow rates.



	<b>Max. tank diameter [m]</b>	0	1	2	3	4	5	6	7	8	9
--	-------------------------------	---	---	---	---	---	---	---	---	---	---

**Materials**  
316L SS, 440C SS  
Hastelloy C22,  
Hastelloy C276


**Max. temperature**  
140 °C

**Recommended operating pressure**  
2 bar


**Installation**  
Operation in every direction is possible

**Filtration**  
Line strainer with a mesh size of 0.1 mm/170 mesh


**Bearing**  
Double ball bearing made of 440C SS  
Double ball bearing made of C276

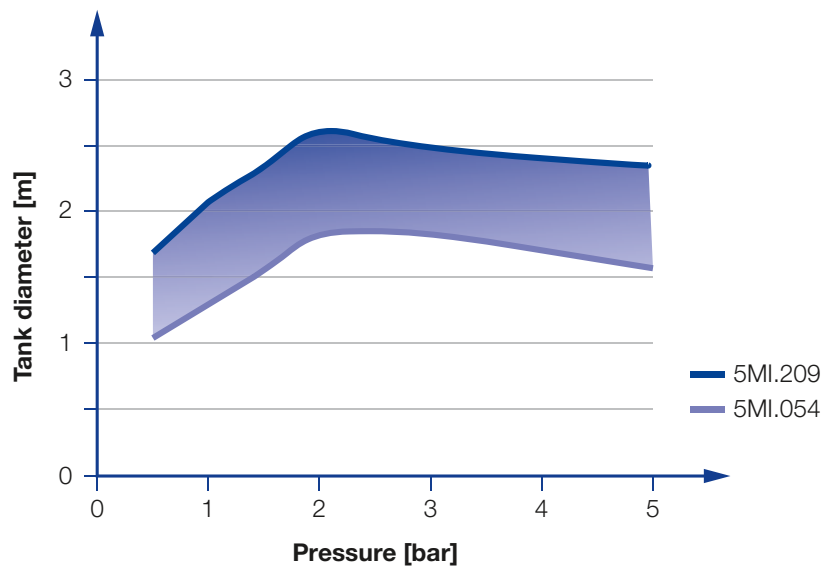

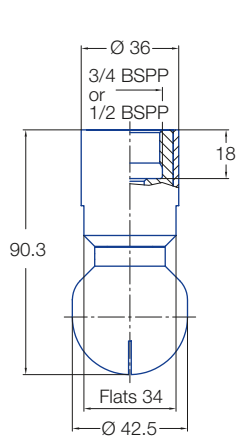




Overview of the tank diameter, depending upon the pressure of series 5MI

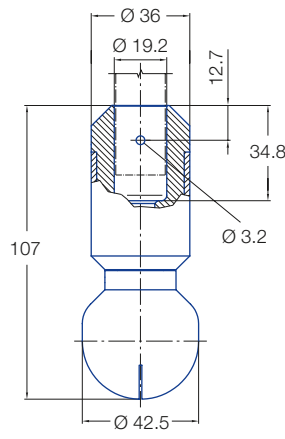

Female thread



Dimensions slip-on connection according to ASME-BPE (OD-tube)

Spray angle 	Ordering no.						E Ø [mm]	V̇ [l/min]				Max. tank diameter [m]
	Type	Mat. no.		Connection				p [bar] (p <sub>max</sub> = 5 bar)				
		1Y 316L SS	21 Hastelloy C22	1/2 BSPP	3/4 BSPP	3/4" Slip-on		1	2	3	at 40 psi [US gal/min]	
60° 	5MI.162	○	○	AH	-	TF07	2.6	45	63	77	20	-
180° 	5MI.113	○	○	-	AL	TF07	1.0	47	67	82	21	2.6
180° 	5MI.114	○	○	-	AL	TF07	1.0	47	67	82	21	2.6
360° 	5MI.054	○	○	-	AL	TF07	0.5	21	30	37	9	1.8
	5MI.074	○	○	-	AL	TF07	0.6	35	49	60	15	2.1
	5MI.014	○	○	-	AL	TF07	0.9	49	69	85	21	2.3
	5MI.209	○	○	-	AL	TF07	1.5	71	100	122	31	2.6

E = narrowest free cross-section  
NPT, more slip-on sizes and weld-on versions on request

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

### Information on operation


- Operation with compressed air only for short-term usage. Operation above the recommended operating pressure has negative effects on the cleaning result and wear.


### Slip-on information


- R-clip is included. Mat. no. 1Y: R-clip made of 316L SS (Ordering no. 095.022.1Y.50.60). Mat. no. 21: R-clip made of Hastelloy C22 (Ordering no. 095.022.21.50.60)
- Depending on diameter of the adapter the flow rate can increase due to leakage between connecting pipe and rotating cleaning nozzle.


**Example of ordering with ATEX approval. FDA and (EC) 1935/2004 conform. Only material 316L SS available with ATEX approval.**

**Unit group/category/zones:**

 II 1G Ex h IIB T6...T3 Ga

 II 1D Ex h IIIC T85 °C...T200 °C Da







**Example of Ordering: 5MI.162 + 1Y + AH = 5MI.162.1Y.AH.EX**

**Example of ordering with FDA and (EC) 1935/2004 conformity.**

**All Materials are suitable for contact with food.**





**Example of Ordering: 5MI.162 + 1Y + AH = 5MI.162.1Y.AH**



**ATTENTION:** For the ATEX version of the slip-on connection the code for the connection changes. For a 5MI.XXX.1Y.TF.07 with ATEX the order number changes to 5MI.XXX.1Y.T2.EX



# Rotating cleaning nozzles »PTFE Whirly« Series 573/583

## Series 573/583

The PTFE Whirly is of particular interest for applications in the chemical, pharmaceutical and food industries. It works with rotating solid jets and is suitable for use in corrosive environments. The slip-on connection has a 3-A certification and can be used in areas subject to particularly high hygiene requirements, such as contact with food.

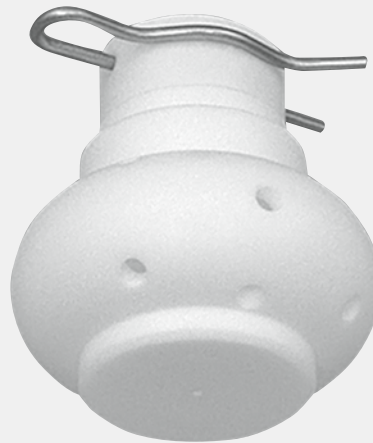

**Function video**  
Scan the QR-code or go to:  
[www.lechler.com/ptfewhirly](http://www.lechler.com/ptfewhirly)

	<b>Max. tank diameter [m]</b>	0	1	2	3	4	5	6	7	8	9
--	-------------------------------	---	---	---	---	---	---	---	---	---	---



**Material**  
PTFE



**Max. temperature**  
95 °C (versions for use with higher temperature (130 °C) on request)



**Recommended operating pressure**  
2 bar




**Installation**  
Operation in every direction is possible




**Filtration**  
Line strainer with a mesh size of 0.3 mm/50 mesh



**Bearing**  
Slide bearing made of PTFE

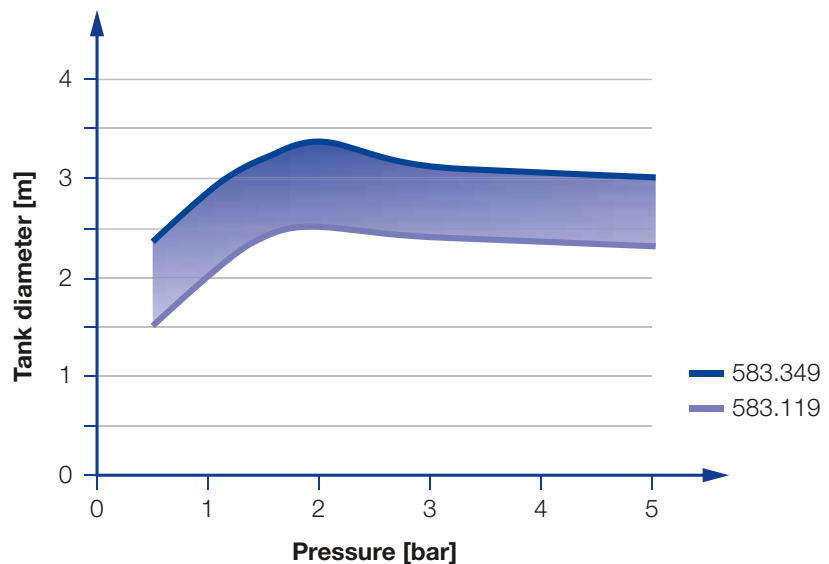

Overview of the tank diameter, depending upon the pressure of series 573/583

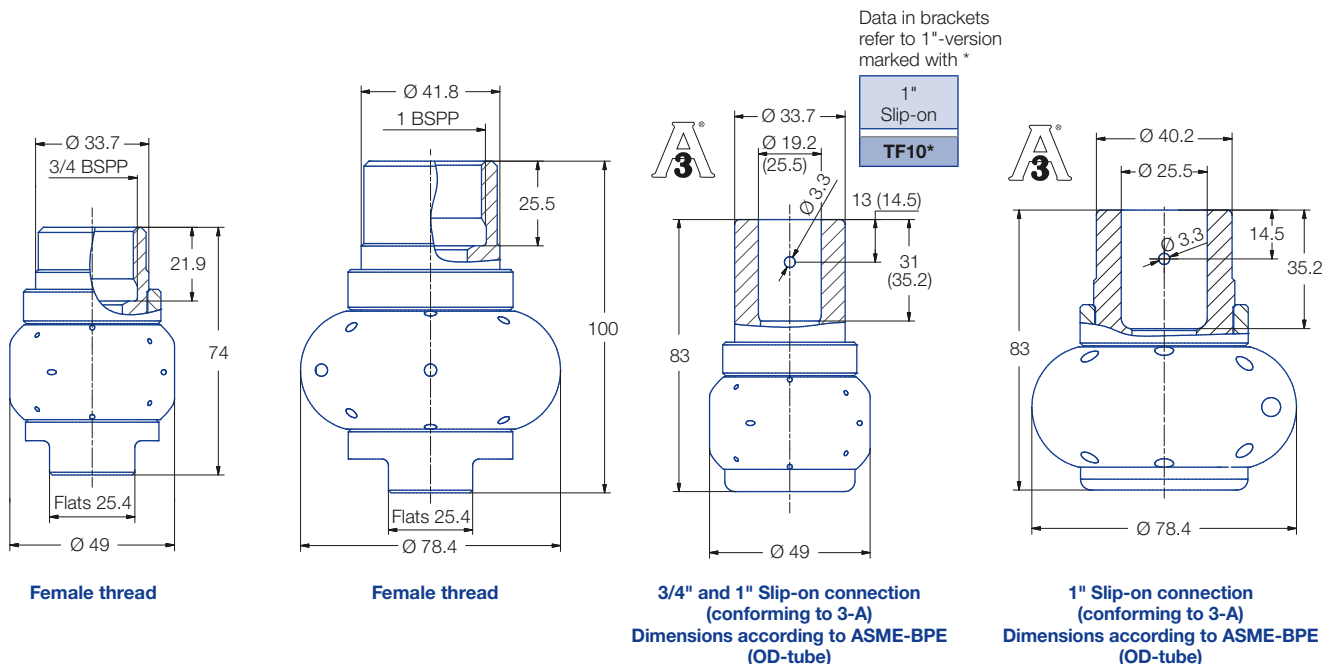

Spray angle	R-clip	Ordering no.				E Ø [mm]	V̇ [l/min]				Max. tank diameter [m]	
		Type	Connection				p [bar] (p <sub>max</sub> = 6 bar)					
			3/4 BSPP	1 BSPP	3/4" Slip-on		1" Slip-on	1	2	3		at 40 psi [US gal/min]
270°	1)	<b>583.116.55</b>	<b>AL</b>	-	<b>TF07</b>	-	2.4	47	67	82	21	2.5
	2)	<b>583.346.55</b>	-	-	-	<b>TF10</b>	5.9	159	225	276	70	3.2
270°	1)	<b>573.116.55</b>	<b>AL</b>	-	<b>TF07</b>	-	2.4	47	67	82	21	2.5
360°	1)	<b>583.119.55</b>	<b>AL</b>	-	<b>TF07</b>	<b>TF10*</b>	1.8	41	58	71	18	2.4
	1)	<b>583.209.55</b>	<b>AL</b>	-	<b>TF07</b>	<b>TF10*</b>	3.5	71	100	122	31	2.5
	1)	<b>583.269.55</b>	<b>AL</b>	-	<b>TF07</b>	-	4.8	103	145	178	45	2.8
	2)	<b>583.279.55</b>	-	<b>AN</b>	-	<b>TF10</b>	3.7	106	150	184	47	3.0
	2)	<b>583.349.55</b>	-	<b>AN</b>	-	<b>TF10</b>	5.6	159	225	276	70	3.2

E = narrowest free cross-section · NPT on request  
 \* See drawing 3 for details

**The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.**

### Information on operation

- Operation with compressed air only for short-term usage. Operation above the recommended operating pressure has negative effects on the cleaning result and wear.

### Slip-on information

- R-clip made of 316L SS is included (Ordering no.: R-clip 1: 095.013.17.06.60, R-clip 2: 095.013.17.06.61).
- Depending on diameter of the adapter the flow rate can increase due to leakage between connecting pipe and rotating cleaning nozzle.

<b>Example of ordering:</b>	<b>Type</b>	<b>+</b>	<b>Connection</b>	<b>=</b>	<b>Ordering no.</b>
	<b>583.119.55.</b>	<b>+</b>	<b>AL</b>	<b>=</b>	<b>583.119.55.AL</b>



# Pop-up rotating cleaning nozzles »PopUp Whirly« Series 5P2/5P3

**NEW**

## Series 5P2/5P3

When a certain fluid pressure is reached, the rotating cleaning nozzle of PopUp Whirly is automatically extended from the enclosure. These free-spinning rotating nozzles can be installed flush in the tank wall. They are also suitable for cleaning pipes and for applications that use foam. They are of particular interest for applications in the food and beverage industry as well as for the pharmaceutical and chemical industry.



**Function video**  
Scan the QR-code or go to:  
[www.lechler.com/popupwhirly](http://www.lechler.com/popupwhirly)

	<b>Max. tank diameter [m]</b>	0	1	2	3	4	5	6	7	8	9
--	-------------------------------	---	---	---	---	---	---	---	---	---	---



### Materials

316L SS,  
316Ti SS (spring),  
316 SS (snap ring),  
PEEK (slide-bearing),  
FKM (O-ring)



### Max. temperature

140 °C



### Recommended operating pressure

2 bar, 5P2: opening pressure approx. 1.0 bar, closing pressure approx. 0.5 bar,  
5P3: opening pressure approx. 0.9 bar, closing pressure approx. 0.5 bar



### Installation

Operation in every direction is possible




### Filtration

Line strainer with a mesh size of 0.3 mm/50 mesh




### Bearing

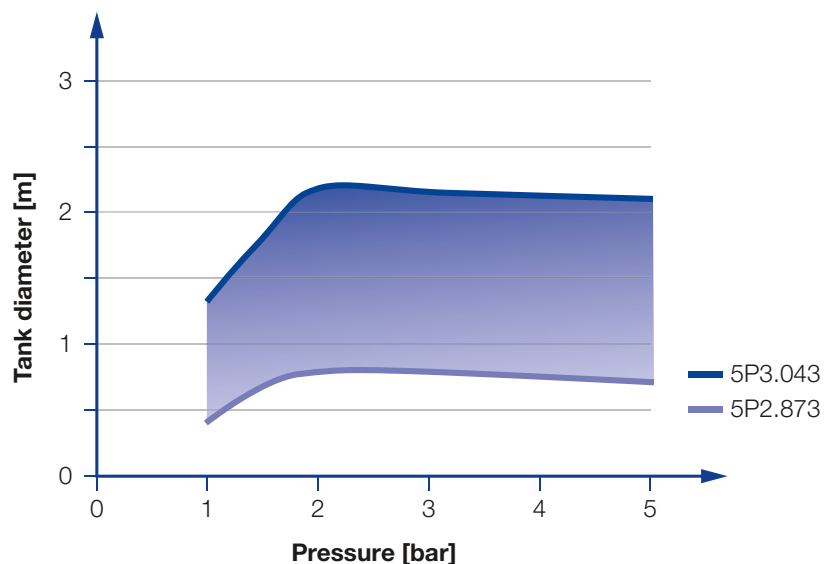

Slide bearing made of PEEK



Overview of the tank diameter, depending upon the pressure of series 5P2/5P3
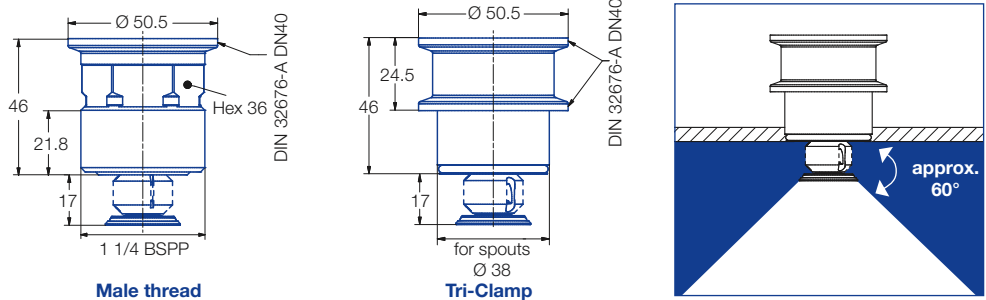
### Series 5P2




Spray angle 	Ordering no.	Tank connection		E Ø [mm]	V [l/min]				Max. tank diameter [m]
		1 1/4 BSPP	Tri- Clamp		p [bar] (p <sub>max</sub> = 6 bar)				
					1	2	3	at 40 psi [US gal/min]	
	5P2.873.1Y.AP	○	-	1.0	10.6	15.0	18.4	5	0.8
	5P2.873.1Y.00	-	○	1.0	10.6	15.0	18.4	5	0.8
	5P2.923.1Y.AP	○	-	2.4	14.1	20.0	24.5	6	1.0
	5P2.923.1Y.00	-	○	2.4	14.1	20.0	24.5	6	1.0


The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

### Nozzle installation

Via thread in idle position




Via Tri-Clamp in operating position

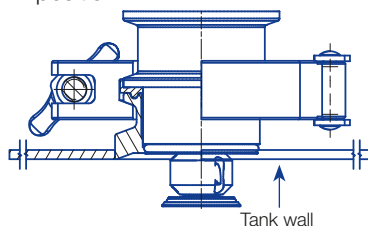

### Information on operation

- The PopUp Whirly is not suitable for operation with compressed air or any other gas.
- Operation above the recommended operating pressure has negative effects on the cleaning result and wear.

### Weld-in flange for Tri-Clamp-Version



#### Ordering number

050.020.1Y.01.00

#### Material


316L SS

#### Information


Gasket with a thickness of 2 mm must be used if the PopUp Whirly is installed with this weld-in flange.




## Series 5P3



Male thread



Tri-Clamp




Spray angle	Ordering no.	Tank connection		E Ø [mm]	V [l/min]				Max. tank diameter [m]
		1 1/2 BSPP	Tri-Clamp		p [bar] (p <sub>max</sub> = 6 bar)				
					1	2	3	at 40 psi [US gal/min]	
	<b>5P3.043.1Y.AR</b>	○	-	3.2	28.3	40	49	12	2.2
	<b>5P3.043.1Y.00</b>	-	○	3.2	28.3	40	49	12	2.2


The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

## Nozzle installation

Via thread in idle position




Via Tri-Clamp in operating position

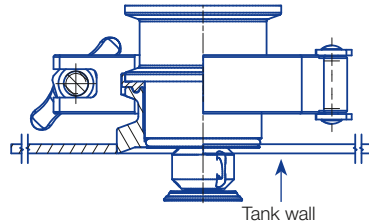

## Information on operation

- The PopUp Whirly is not suitable for operation with compressed air or any other gas.
- Operation above the recommended operating pressure has negative effects on the cleaning result and wear.

## Weld-in flange for Tri-Clamp-Version



### Ordering number

050.020.1Y.01.01

### Material

316L SS

### Information

Gasket with a thickness of 2 mm must be used if the PopUp Whirly is installed with this weld-in flange.

# Pop-up rotating cleaning nozzles »PopUp Whirly« Series 5P2/5P3 ATEX version

## Series 5P2/5P3

The PopUp Whirly is designed for cleaning in confined spaces and for tanks or pipelines where conventional cleaning systems could affect the process. The free-spinning rotating nozzle can be installed flush with the wall. When a certain liquid pressure is applied, the rotating cleaning nozzle of the PopUp Whirly extends automatically and starts cleaning. The PopUp Whirly is also suitable for pipe cleaning and for applications that use foam. It is particularly interesting for applications in the food and beverage industry as well as in the chemical and pharmaceutical industry. The ATEX approval makes the PopUp Whirly suitable for use in explosive areas.



	<b>Max. tank diameter [m]</b>	0	1	2	3	4	5	6	7	8	9
--	-------------------------------	---	---	---	---	---	---	---	---	---	---

**Materials**  
316L SS,  
316Ti SS (spring),  
316 SS (snap ring),  
FKM (O-rings)


**Max. temperature**  
140 °C

**Recommended operating pressure**  
2 bar  
5P2:  
opening pressure approx. 1.0 bar  
closing pressure approx. 0.5 bar  
5P3:  
opening pressure approx. 0.9 bar  
closing pressure approx. 0.5 bar

**Installation**  
Operation in every direction is possible




**Filtration**  
Line strainer with a mesh size of 0.3 mm/50 mesh

**Bearing**  
Slide bearing made of hardened stainless steel

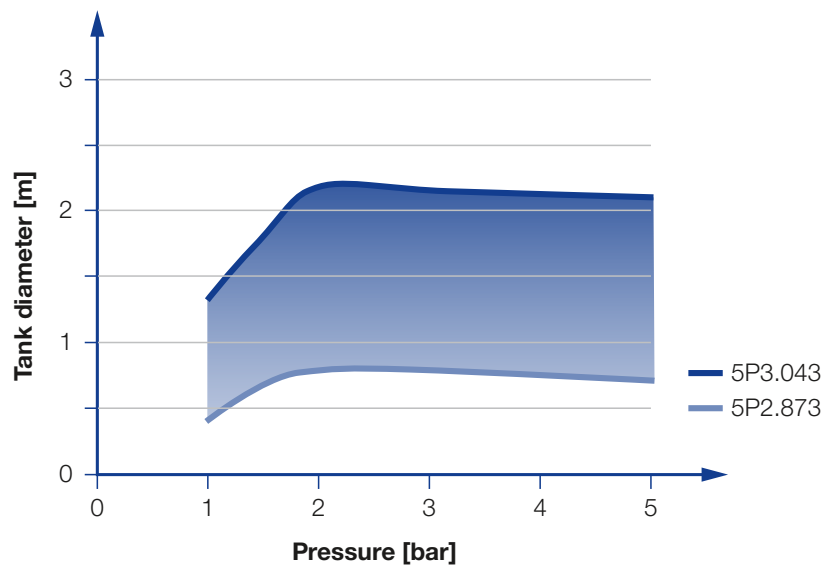

Overview of the tank diameter, depending upon the pressure of series 5P2/5P3




### Series 5P2



Spray angle	Ordering no.	Tank connection		E Ø [mm]	V̇ [l/min]				Max. tank diameter [m]
		1 1/4 BSPP	Tri-Clamp		p [bar] (p <sub>max</sub> = 6 bar)				
					1	2	3	at 40 psi [US gal/min]	
	5P2.873.1Y.AP.EX	○	-	3.0	10.6	15.0	18.4	5	0.8
	5P2.873.1Y.00.EX	-	○	3.0	10.6	15.0	18.4	5	0.8
	5P2.923.1Y.AP.EX	○	-	3.5	14.1	20.0	24.5	6	1.0
	5P2.923.1Y.00.EX	-	○	3.5	14.1	20.0	24.5	6	1.0

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

### Series 5P3




Spray angle	Ordering no.	Tank connection		E Ø [mm]	V̇ [l/min]				Max. tank diameter [m]
		1 1/2 BSPP	Tri-Clamp		p [bar] (p <sub>max</sub> = 6 bar)				
					1	2	3	at 40 psi [US gal/min]	
	5P3.043.1Y.AR.EX	○	-	3.3	28.3	40	49	12	2.2
	5P3.043.1Y.00.EX	-	○	3.3	28.3	40	49	12	2.2


The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

### Nozzle installation

With thread




With Tri-Clamp



### Information on operation


- The PopUp Whirly is not suitable for operation with compressed air or any other gas.
- Operation above the recommended operating pressure has negative effects on the cleaning result and wear.

### Weld-in flange for Tri-Clamp-Version



**5P2**

Ord.-no. 050.020.1Y.01.00



**5P3**

Ord.-no. 050.020.1Y.01.01


### Information

Gasket with a thickness of 2 mm must be used if the PopUp Whirly is installed with this weld-in flange.

### Material


316L SS

### Weld-in socket for Thread-Version



**5P2**

Ord.-no. 050.020.1Y.AQ.00



**5P3**

Ord.-no. 050.020.1Y.AS.00

### Information

The thread is hygienically sealed with 2 O-rings included in the scope of delivery.

### Material


316L SS

### Unit group/category/zones

- Ex II 1G Ex h IIB T6...T3 Ga
- Ex I 1D Ex h IIIC T85 ° C...T170 ° C Da



# EFFICIENT REMOVAL OF LIGHT AND MEDIUM SOILING

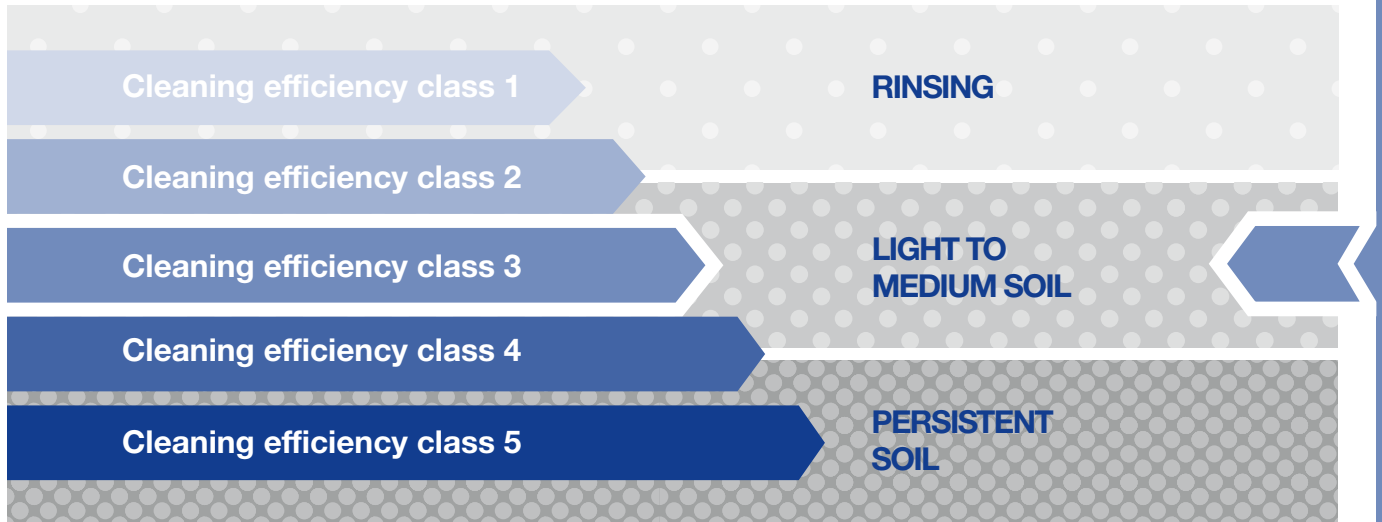

## Cleaning efficiency class 3

Due to their special nozzle geometry and flow rates from 11 to 639 l/min at 2 bar, the rotating nozzles in efficiency class 3 are suitable for cleaning medium soiling from tanks and equipment. Such soiling is especially found in the food and beverage industry, but also in the chemical and pharmaceutical industry. The free-spinning rotating nozzles in class 3 are made from especially high-grade materials and are available in tank sizes from small to large.

The HygienicWhirly is perfectly suited for hygienically sensitive areas and can also be used for the output of foam.

The Whirly series is also available as an ATEX version and can therefore also be used in explosive environments.



Max. tank diameter [m]	0	1	2	3	4	5	6	7	8

**Operating principles**  
Free-spinning

**Flow rates at 2 bar**  
11 to 639 l/min

**Recommended operating pressures**  
2 to 3 bar

**Max. temperatures**  
90 to 140 °C





# Rotating cleaning nozzles »HygienicWhirly« Series 594/595

## Series 594/595

The HygienicWhirly with its highly effective flat jets is particularly suited for high hygiene requirements and for the application of foam. Operation at low pressure with good cleaning effect is also possible.



	<b>Max. tank diameter [m]</b>	0	1	2	3	4	5	6	7	8
--	-------------------------------	---	---	---	---	---	---	---	---	---



**Materials**  
316L SS, PEEK,  
Slip-on connection  
version: O-ring made  
of EPDM



**Max. temperature**  
100 °C,  
short-term  
up to 140 °C



**Recommended  
operating pressure**  
3 bar




**Installation**  
Operation in every  
direction is possible




**Filtration**  
Line strainer with  
a mesh size of  
0.3 mm/50 mesh




**Bearing**  
Slide bearing  
made of PEEK

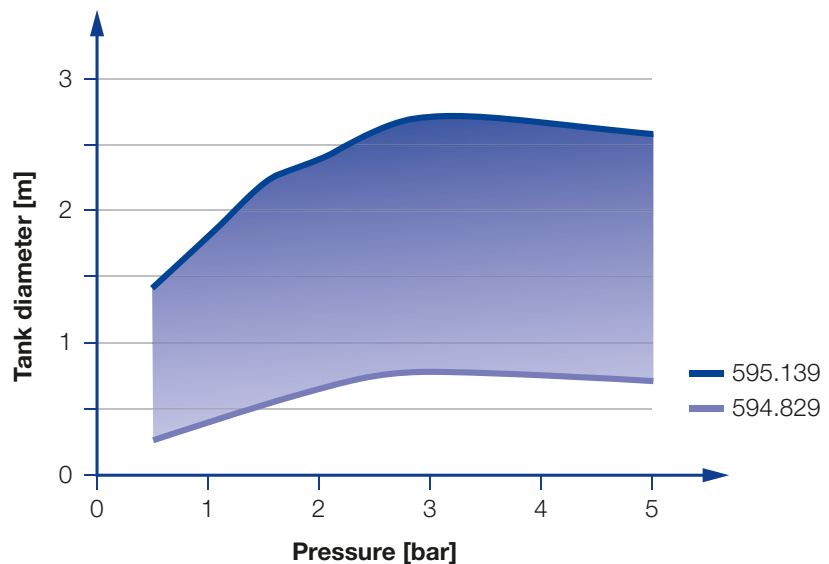


Overview of the tank diameter, depending upon the pressure of series 594/595




**Standard version  
Female tread  
59X.XX9.1Y.AF**



**Standard version  
Female tread  
595.139.1Y.AL**

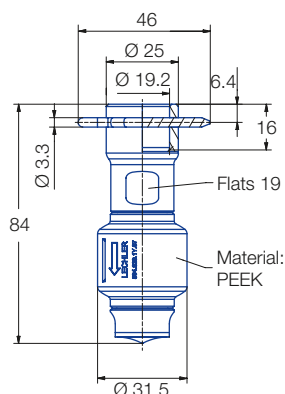

**Dimensions slip-on connection  
according to ASME-BPE (OD-tube)  
59X.XX9.1Y.67**

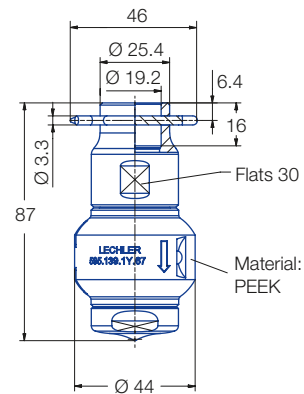

**Dimensions slip-on connection  
according to ASME-BPE (OD-tube)  
595.139.1Y.67**

Spray angle	Ordering no.				E Ø [mm]	V̇ [l/min]					Max. tank diameter [m]
	Type	Connection				p [bar] (p <sub>max</sub> = 5 bar)					
		3/8 BSPP female	3/4 BSPP female	3/4" Slip-on		0.5	1	2	3	at 40 psi [US gal/min]	
360°	594.829.1Y	AF	-	67	1.7	6	8	11	14	3	0.8
	594.879.1Y	AF	-	67	2.5	8	11	15	18	5	1.2
	595.009.1Y	AF	-	67	4.0	16	22	32	39	10	1.5
	595.049.1Y	AF	-	67	4.2	20	28	40	49	12	2.0
	595.139.1Y	-	AL	67	5.0	34	47	67	82	21	2.7

E = narrowest free cross-section · NPT on request

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

### Information on operation

- Operation with compressed air only for short-term usage. Operation above the recommended operating pressure has negative effects on the cleaning result and wear.

### Slip-on information

- R-clip made of 316L SS is included (Ordering no.: 095.022.1Y.50.94.E).
- Depending on diameter of the adapter the flow rate can increase due to leakage between connecting pipe and rotating cleaning nozzle.

<b>Example of ordering:</b>	<b>Type</b>	<b>+</b>	<b>Connection</b>	<b>=</b>	<b>Ordering no.</b>
	594.829.1Y	+	AF	=	594.829.1Y.AF



# Rotating cleaning nozzle »Whirly« Series 569

## Series 569

Popular and proven: the design of the Whirly. It generates effective flat jets, offers various connection options and is available in a very wide range of flow rates. It is also available in an ATEX-approved version and in a range of versions with different spray angles.



	<b>Max. tank diameter [m]</b>	0	1	2	3	4	5	6	7	8
--	-------------------------------	---	---	---	---	---	---	---	---	---



**Materials**  
316L SS, PEEK,  
Rulon 641



**Max. temperature**  
140 °C  
90 °C ATEX version



**Recommended operating pressure**  
2 bar




**Installation**  
Operation in every direction is possible; in horizontal installation position no rotating until 2 bar, ATEX version only vertical use




**Filtration**  
Line strainer with a mesh size of 0.1 mm / 170 mesh





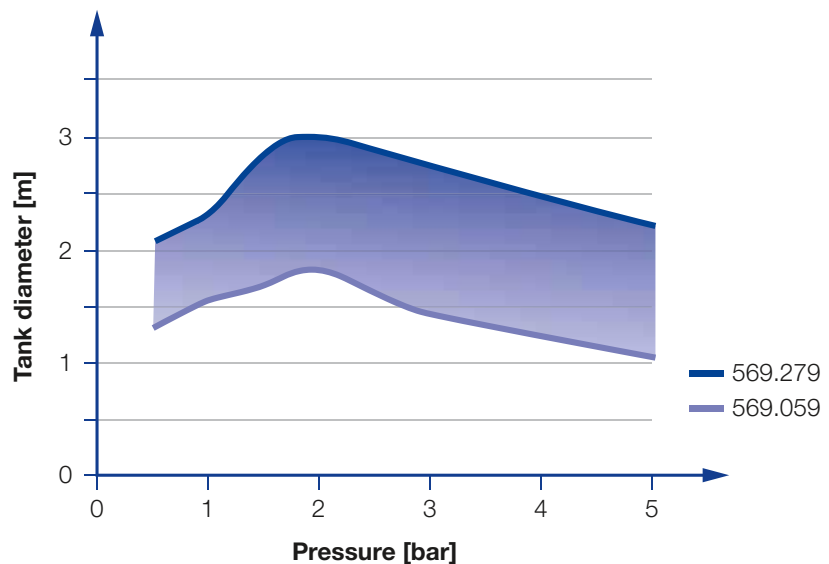

**Bearing**  
Double ball bearing made of stainless steel

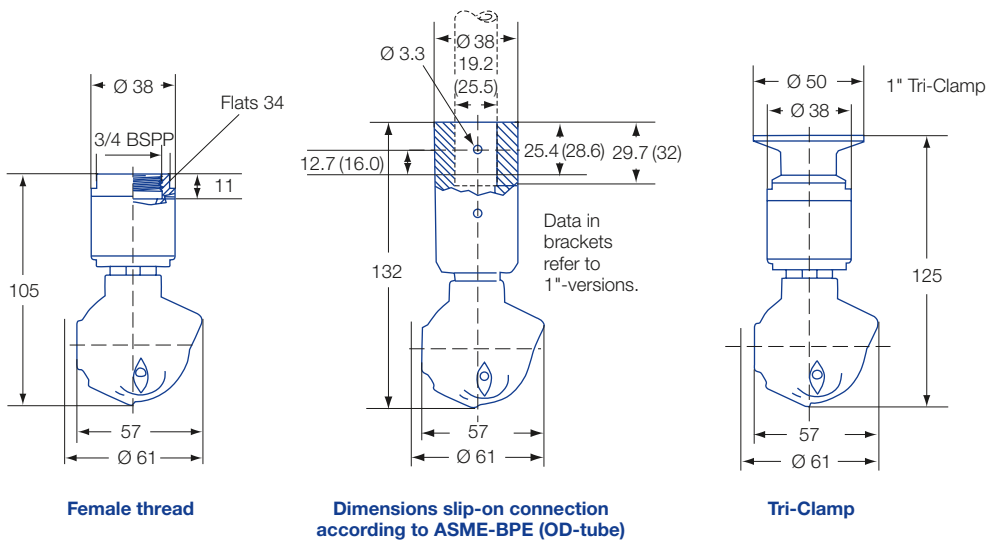

Overview of the tank diameter, depending upon the pressure of series 569



Spray angle 	Ordering no.					E Ø [mm]	V̇ [l/min]				Max. tank diameter [m]
	Type	Connection					p [bar] (p <sub>max</sub> = 6 bar)				
		3/4 BSPP female	3/4" Slip-on	1" Slip-on	1" Tri-Clamp		1	2	3	at 40 psi [US gal/min]	
270° 	569.055.1Y	AL	TF07	TF10	10	3.6	36	48	62	15	1.8
	569.135.1Y	AL	TF07	TF10	10	4.8	52	71	87	22	2.1
	569.195.1Y	AL	TF07	TF10	10	5.6	69	97	119	30	2.6
270° 	569.056.1Y	AL	TF07	TF10	10	3.6	36	48	62	15	1.8
	569.106.1Y	AL	TF07	TF10	10	4.8	41	58	71	18	2.1
	569.196.1Y	AL	TF07	TF10	10	5.6	69	97	119	30	2.6
360° 	569.059.1Y	AL	TF07	TF10	10	3.2	36	48	62	15	1.8
	569.139.1Y	AL	TF07	TF10	10	3.6	52	71	87	22	2.1
	569.199.1Y	AL	TF07	TF10	10	4.8	69	97	119	30	2.6
	569.279.1Y	AL	TF07	TF10	10	7.1	103	145	178	45	3.0

E = narrowest free cross-section · NPT on request

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

### Information on operation


- Operation with compressed air only for short-term usage. Operation above the recommended operating pressure has negative effects on the cleaning result and wear.


### Slip-on information


- R-clip made of 316L SS is included (Ordering no.: 095.022.1Y.50.60.E).
- Depending on diameter of the adapter the flow rate can increase due to leakage between connecting pipe and rotating cleaning nozzle.


**Example of ordering with ATEX approval. FDA and (EC) 1935/2004 conform. Only 3/4" thread connection and 3/4" Slip-on connection available with ATEX approval.**

**Unit group/category/zones:**

 II 1G Ex h IIB T6...T3 Ga

 II 1D Ex h IIIC T85 °C...T170 °C Da







Example of Ordering:	Type	+ Connection	= Ordering no.
569.055.1Y.XX.EX	AL		= 569.055.1Y.AL.EX

**Example of ordering with FDA and (EC) 1935/2004 conformity.**

**All Materials are suitable for contact with food.**





Example of Ordering:	Type	+ Connection	= Ordering no.
569.055.1Y.XX	AL		= 569.055.1Y.AL


**ATTENTION:** For the **ATEX** version of the slip-on connection the code for the connection changes. For a 569.XXX.1Y.**TF.07** with ATEX the order number changes to 569.055.1Y.**TF.EX**



# Rotating cleaning nozzles »Gyro« Series 577

## Series 577

The Gyro cleans with powerful nozzle inserts and is available in many flow rates and spray angles. It is also suitable for very large tanks and is insensitive to clogging.



Function video  
Scan the QR-code or go to:  
[www.lechler.com/gyro](http://www.lechler.com/gyro)

	<b>Max. tank diameter [m]</b>	0	1	2	3	4	5	6	7	8	9
--	-------------------------------	---	---	---	---	---	---	---	---	---	---

**Materials**  
316L SS, PTFE

**Max. temperature**  
90 °C


**Recommended operating pressure**  
3 bar

**Installation**  
Vertically facing downward


**Filtration**  
Line strainer with a mesh size of 0.3 mm/50 mesh

**Bearing**  
Slide bearing made of PTFE



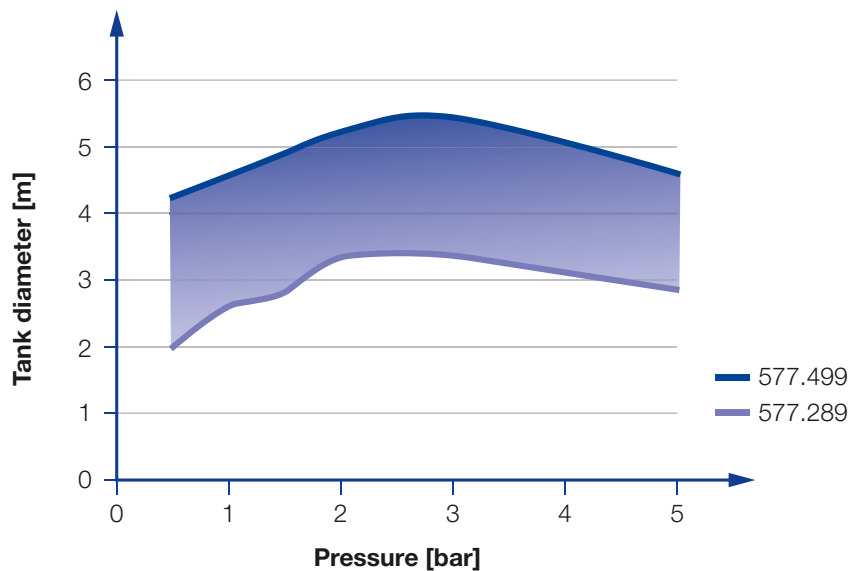


**Accessories**  
Spare parts set consisting of:  
top seal, bottom seal, bolt, nut, sleeve, instructions for use

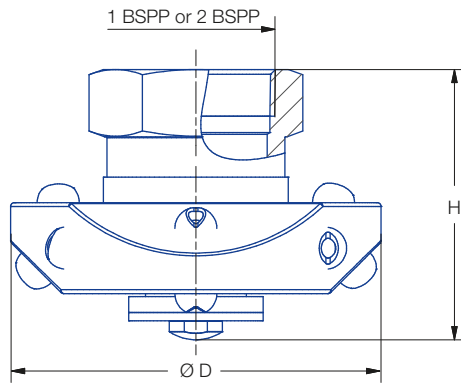

Overview of the tank diameter, depending upon the pressure of series 577



Female thread

Spray angle 	Ordering no.			V̇ [l/min]					Dimensions	
	Type	Connection		p [bar] (p <sub>max</sub> = 5 bar)					Height H [mm]	Diameter D [mm]
		1 BSPP	2 BSPP	1	2	3	5	at 40 psi [US gal/min]		
180° 	577.283.1Y	AN	-	115	163	200	258	50	72	118
	577.363.1Y	AN	-	182	258	316	408	80	72	118
	577.403.1Y	-	AW	228	322	394	509	100	103	156
	577.433.1Y	-	AW	273	386	473	610	120	103	156
	577.523.1Y	-	AW	452	639	783	1,010	170	103	156
180° 	577.284.1Y	AN	-	115	163	200	258	50	72	118
	577.364.1Y	AN	-	182	258	316	408	80	72	118
	577.404.1Y	-	AW	228	322	394	509	100	103	156
	577.434.1Y	-	AW	273	386	473	610	120	103	156
	577.494.1Y	-	AW	380	538	659	851	170	103	156
270° 	577.285.1Y	AN	-	115	163	200	258	50	72	118
	577.365.1Y	AN	-	182	258	316	408	80	72	118
	577.405.1Y	-	AW	228	322	394	509	100	103	156
	577.435.1Y	-	AW	273	386	473	610	120	103	156
	577.495.1Y	-	AW	380	538	659	851	170	103	156
360° 	577.289.1Y	AN	-	115	163	200	258	50	72	118
	577.369.1Y	AN	-	182	258	316	408	80	72	118
	577.409.1Y	-	AW	228	322	394	509	100	103	156
	577.439.1Y	-	AW	273	386	473	610	120	103	156
	577.499.1Y	-	AW	380	538	659	851	170	103	156

NPT on request

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

**Information on operation**


- Operation with compressed air only for short-term usage. Operation above the recommended operating pressure has negative effects on the cleaning result and wear.

<b>Example for Ordering:</b>	<b>Type</b>	<b>+</b>	<b>Connection</b>	<b>=</b>	<b>Ordering no.</b>
	577.283.1Y.	+	AN	=	577.283.1Y.AN





# EFFECTIVE REMOVAL OF HEAVY SOILING

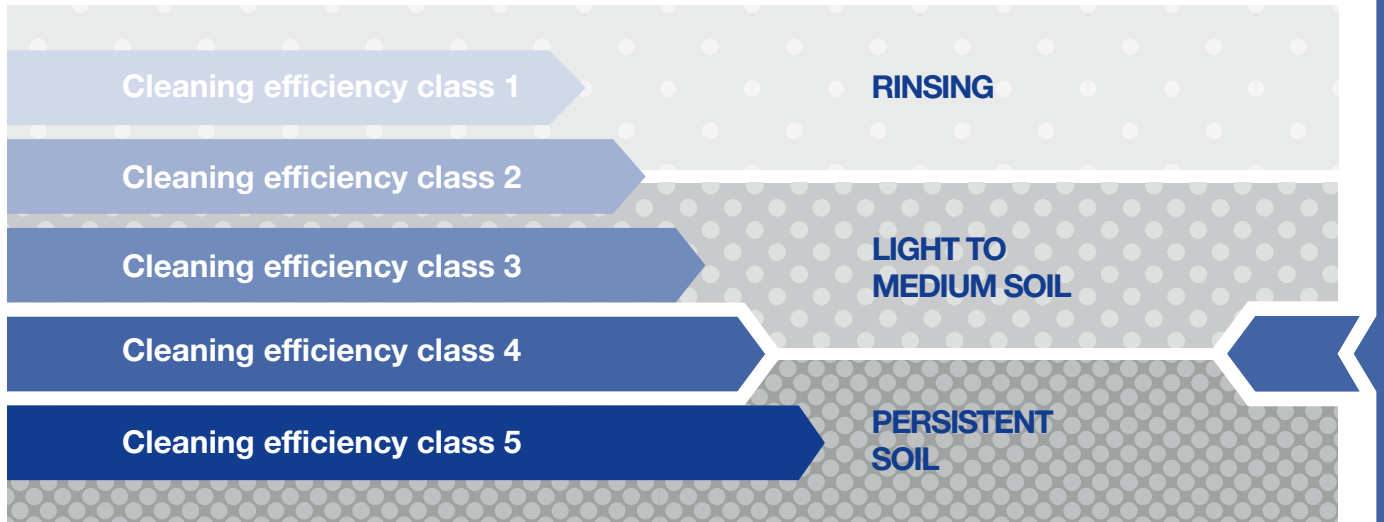


## Cleaning efficiency class 4


The Lechler products in this class have controlled rotating cleaning nozzles. They are suitable for contact with food and the cleaning of large tanks. The cleaning nozzles of cleaning efficiency class 4 are available in many different sizes and flow rates.


The efficient flat spray nozzle geometry of the rotating cleaners in cleaning efficiency class 4 ensures the removal of heavy soiling at temperatures of up to 140 °C. Process reliability is increased through combination with the Lechler rotation monitoring sensor.



 **Operating principles**  
Controlled rotation

 **Flow rates at 2 bar**  
25 to 300 l/min

 **Recommended operating pressures**  
3 to 5 bar

 **Max. temperatures**  
95 to 140 °C



# Rotating cleaning nozzle »XactClean® HP« Series 5S2/5S3

## Series 5S2/5S3

Specially developed flat fan nozzles provide high impact and uniform cleaning for the XactClean® HP. The controlled rotation ensures that the XactClean® HP works extremely efficient. Thanks to the robust drive unit the XactClean® HP is very reliable and ensures increased operation liability. It is available in various spray angles and flow rates and is also compatible with the Lechler rotating monitoring sensor.



**Materials**  
316L SS, 316 SS, 632 SS, PEEK, PEEK ESD (ATEX version only), PTFE, Zirconium oxide, EPDM

**Max. temperature**  
95 °C


**Recommended operating pressure**  
5 bar

**Installation**  
Operation in every direction is possible


**Filtration**  
Line strainer with a mesh size of 0.3 mm/50 mesh

**Bearing**  
Double ball bearing

**Rotation monitoring sensor**  
Sensor compatible  
Info: see page 65

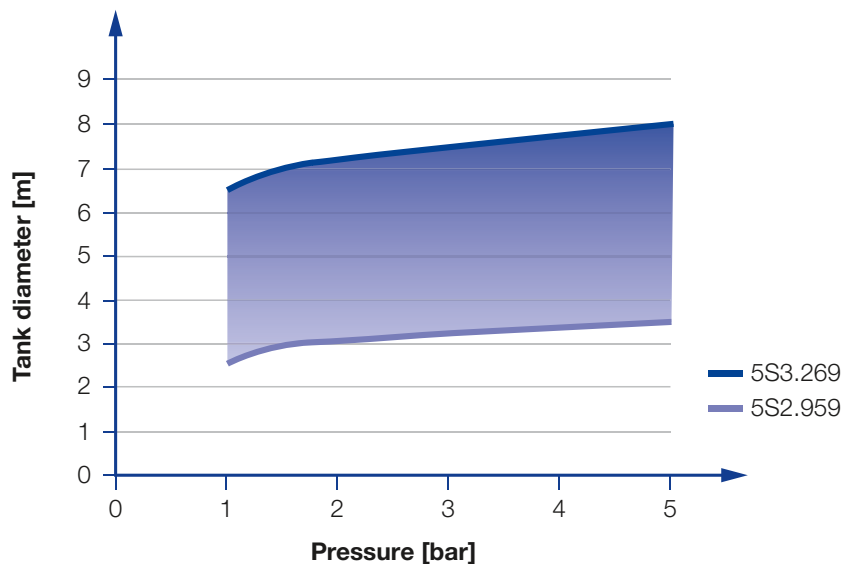

Overview of the tank diameter, depending upon the pressure of series 5S2/5S3

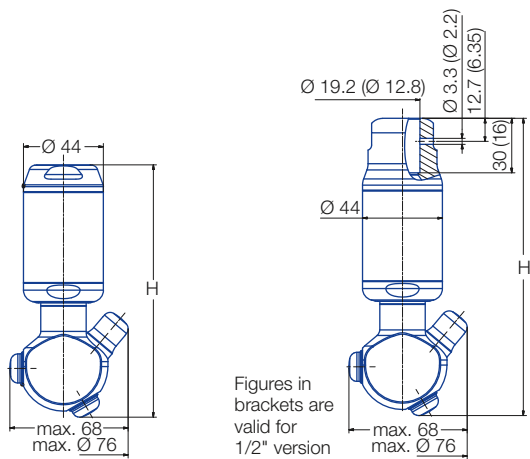

Female thread

Dimensions slip-on connection according to ASME-BPE (OD-tube)

### Nozzle dimensions [mm]

Connection	Max. Height [H]
<b>AF</b>	146
<b>AH</b>	149
<b>AL</b>	139
<b>AN</b>	139
<b>TF05</b>	148
<b>TF07</b>	164

Spray angle	Ordering no.							E Ø [mm]	V̇ [l/min]					Max. tank diameter [m]
	Type	Connection							p [bar] (p <sub>max</sub> = 15 bar)					
		3/8 BSPP female	1/2 BSPP female	3/4 BSPP female	1 BSPP female	1/2" Slip-on	3/4" Slip-on		2	5	10	at 40 psi [US gal/min]		
180° 	<b>5S2.953.1Y</b>	<b>AF</b>	<b>AH</b>	-	-	<b>TF05</b>	-	1.7	25	40	57	7.8	3.5	
	<b>5S3.053.1Y</b>	-	<b>AH</b>	-	-	-	<b>TF07</b>	2.0	41	65	92	12.8	4.0	
	<b>5S3.113.1Y</b>	-	<b>AH</b>	<b>AL</b>	-	-	<b>TF07</b>	2.0	60	94	133	18.4	6.0	
	<b>5S3.183.1Y</b>	-	-	<b>AL</b>	-	-	<b>TF07</b>	2.0	89	141	199	27.7	7.0	
	<b>5S3.233.1Y</b>	-	-	<b>AL</b>	-	-	<b>TF07</b>	2.0	111	175	248	34.3	7.5	
	<b>5S3.263.1Y</b>	-	-	<b>AL</b>	<b>AN</b>	-	<b>TF07</b>	2.0	135	213	301	41.8	8.0	
180° 	<b>5S2.954.1Y</b>	<b>AF</b>	<b>AH</b>	-	-	<b>TF05</b>	-	1.7	25	40	57	7.8	3.5	
	<b>5S3.054.1Y</b>	-	<b>AH</b>	-	-	-	<b>TF07</b>	2.0	41	65	92	12.8	4.0	
	<b>5S3.114.1Y</b>	-	<b>AH</b>	<b>AL</b>	-	-	<b>TF07</b>	2.0	60	94	133	18.4	6.0	
	<b>5S3.184.1Y</b>	-	-	<b>AL</b>	-	-	<b>TF07</b>	2.0	89	141	199	27.7	7.0	
	<b>5S3.234.1Y</b>	-	-	<b>AL</b>	-	-	<b>TF07</b>	2.0	111	175	248	34.3	7.5	
	<b>5S3.264.1Y</b>	-	-	<b>AL</b>	<b>AN</b>	-	<b>TF07</b>	2.0	135	213	301	41.8	8.0	
270° 	<b>5S2.955.1Y</b>	<b>AF</b>	<b>AH</b>	-	-	<b>TF05</b>	-	1.7	25	40	57	7.8	3.5	
	<b>5S3.055.1Y</b>	-	<b>AH</b>	-	-	-	<b>TF07</b>	2.0	41	65	92	12.8	4.0	
	<b>5S3.115.1Y</b>	-	<b>AH</b>	<b>AL</b>	-	-	<b>TF07</b>	2.0	60	94	133	18.4	6.0	
	<b>5S3.185.1Y</b>	-	-	<b>AL</b>	-	-	<b>TF07</b>	2.0	89	141	199	27.7	7.0	
	<b>5S3.235.1Y</b>	-	-	<b>AL</b>	-	-	<b>TF07</b>	2.0	111	175	248	34.3	7.5	
	<b>5S3.265.1Y</b>	-	-	<b>AL</b>	<b>AN</b>	-	<b>TF07</b>	2.0	135	213	301	41.8	8.0	
270° 	<b>5S2.956.1Y</b>	<b>AF</b>	<b>AH</b>	-	-	<b>TF05</b>	-	1.7	25	40	57	7.8	3.5	
	<b>5S3.056.1Y</b>	-	<b>AH</b>	-	-	-	<b>TF07</b>	2.0	41	65	92	12.8	4.0	
	<b>5S3.116.1Y</b>	-	<b>AH</b>	<b>AL</b>	-	-	<b>TF07</b>	2.0	60	94	133	18.4	6.0	
	<b>5S3.186.1Y</b>	-	-	<b>AL</b>	-	-	<b>TF07</b>	2.0	89	141	199	27.7	7.0	
	<b>5S3.236.1Y</b>	-	-	<b>AL</b>	-	-	<b>TF07</b>	2.0	111	175	248	34.3	7.5	
	<b>5S3.266.1Y</b>	-	-	<b>AL</b>	<b>AN</b>	-	<b>TF07</b>	2.0	135	213	301	41.8	8.0	
360° 	<b>5S2.959.1Y</b>	<b>AF</b>	<b>AH</b>	-	-	<b>TF05</b>	-	1.5	25	40	57	7.8	3.5	
	<b>5S3.059.1Y</b>	-	<b>AH</b>	-	-	-	<b>TF07</b>	2.0	41	65	92	12.8	4.0	
	<b>5S3.119.1Y</b>	-	<b>AH</b>	<b>AL</b>	-	-	<b>TF07</b>	2.0	60	94	133	18.4	6.0	
	<b>5S3.189.1Y</b>	-	-	<b>AL</b>	-	-	<b>TF07</b>	2.0	89	141	199	27.7	7.0	
	<b>5S3.239.1Y</b>	-	-	<b>AL</b>	-	-	<b>TF07</b>	2.0	111	175	248	34.3	7.5	
	<b>5S3.269.1Y</b>	-	-	<b>AL</b>	<b>AN</b>	-	<b>TF07</b>	2.0	135	213	301	41.8	8.0	

E = narrowest free cross-section · NPT on request

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.



# Rotating cleaning nozzle »XactClean® HP« Series 5S2/5S3

## Information on operation


- Operation with compressed air only for short-term usage. Operation above the recommended operating pressure has negative effects on the cleaning result and wear.


## Slip-on information

- R-clip made of 316L SS is included (Ordering no.: 095.022.1Y.50.60.E (TF07), 095.013.1E.05.59.0 (TF05)).
- Depending on diameter of the adapter the flow rate can increase due to leakage between connecting pipe and rotating cleaning nozzle.

### Example of ordering with ATEX approval. No FDA and (EC) 1935/2004 conformity.

#### Unit group/category/zones:

 II 1G Ex h IIB T6...T3 Ga

 II 1D Ex h IIIC T85 °C...T150 °C Da

Example	Type	+ Connection	= Ordering no.
of Ordering:	5S2.953.1Y.XX.EX	+ AL	= 5S2.953.1Y.AL.EX

### Example of ordering with FDA and (EC) 1935/2004 conformity.

All Materials are suitable for  
contact with food.



Example	Type	+ Connection	= Ordering no.
of Ordering:	5S2.953.1Y.XX	+ AL	= 5S2.953.1Y.AL


## ATTENTION:

For the **ATEX** version of the slip-on connection the code for the connection changes.  
For a 5S2.XXX.1Y.**TF.05** with ATEX the order number changes to 5S2.XXX.1Y.**T5.EX**  
For a 5S3.XXX.1Y.**TF.07** with ATEX the order number changes to 5S3.XXX.1Y.**T7.EX**



# Rotation Monitoring Sensor

Cleaning processes can be easily and reliably monitored with the Lechler rotation monitoring sensor. The sensor records the quantity of liquid flowing over the sensor tip. With the aid of the software\*, the sensor function can be specifically adjusted to the tank size, pressure and nozzle.

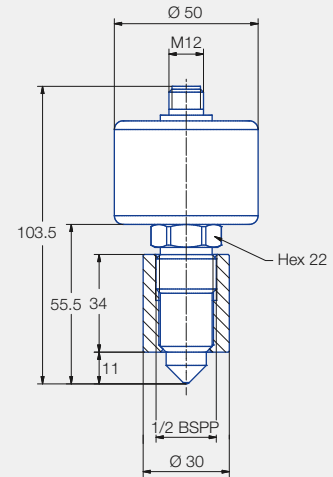

### Electrical data

- Supply voltage:  $U_b = 24\text{ V} \pm 20\%$  (18 to 32 VDC)
- Power requirements:  $< 20\text{ mA}$
- Output signal: PNP, 50 mA short circuit protected, active

### Operating conditions

- Ambient temperature:  $-10^\circ$  up to  $+60^\circ\text{ C}$
- Process temperature:  $0^\circ$  up to  $+100^\circ\text{ C}$

### Materials

- Socket (G 1/2"): 316L SS
- Probe tip: PEEK
- Body: 303 SS

### Operating principle

- Capacitive

### Advantages

- Reliable recognition of any faults during the cleaning cycle
- The process connection of the sensor is in compliance with the hygiene guidelines of the EHEDG
- Simple operation
- Can be connected to PLC
- Only needs to be set up once using the software provided
- Can be specifically adapted to each cleaning task



### Ordering data

Ordering data	Ordering no.
Rotation monitoring sensor with weld-in sleeve	050.040.00.00.00.0
Cable set for first-time operation	050.040.00.00.01.0

### Rotation monitoring sensor with weld-in sleeve



### Cable set for first-time operation/installation



Main adapter with cable



USB adapter with cable



Programming adapter Y-piece



Weld-in mandrel

\* Software download (free of charge): [www.lechler.com/software/rotationcontrolsystem](http://www.lechler.com/software/rotationcontrolsystem)



# Rotating cleaning nozzle »XactClean® HP+« Series 5S5

**NEW**

## Series 5S5

The XactClean® HP+ provides uniform cleaning and high impact, thanks to specially developed flat fan nozzles. Controlled rotation, along with higher flow rates, ensures effective results, especially in larger tanks. The robust drive unit makes the XactClean® HP+ extremely dependable and increases operational reliability. This nozzle is compatible with the Lechler rotation monitoring sensor, making it easy to oversee the cleaning process.



**Function video**  
Scan the QR-code or go to:  
[www.lechler.com/xactcleanhpplus](http://www.lechler.com/xactcleanhpplus)



**Max. tank diameter [m]**



**Material**  
316L SS, 316 SS,  
PEEK, EPDM



**Max. temperature**  
95 °C



**Recommended operating pressure**  
3 bar



**Installation**  
Operation in every direction is possible




**Filtration**  
Line strainer with a mesh size of 0.3 mm/50 mesh




**Bearing**  
Double ball bearing




**Rotation monitoring sensor**  
Sensor compatible,  
Info: see page 65.

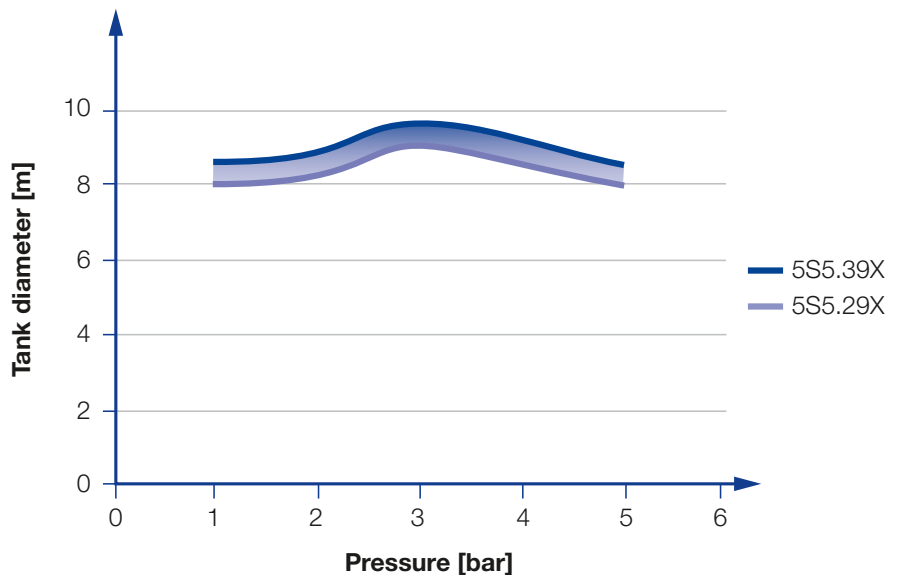

Overview of the tank diameter, depending upon the pressure of series 5S5

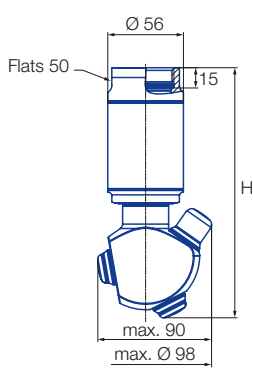



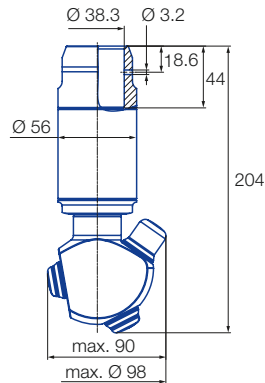



Female thread



Dimensions slip-on connection according to ASME-BPE (OD-tube)

### Nozzle dimensions [mm]

Connection	Max. Height [H]
<b>AN</b>	185
<b>AQ</b>	185
<b>AS</b>	187

Spray angle 	Ordering no.					E Ø [mm]	V [l/min]				Max. tank diameter [m]
	Type	Connection					p [bar] (p <sub>max</sub> = 10 bar)				
		1 BSPP	1 1/4 BSPP	1 1/2 BSPP	1 1/2" Slip-on		2	3	5	at 40 psi [US gal/min]	
180° 	5S5.293.1Y	AN	-	-	TF15	3.0	165	202	261	51.2	9.0
	5S5.323.1Y	AN	AQ	-	TF15	3.0	200	245	316	62.0	9.2
	5S5.363.1Y	-	AQ	AS	TF15	3.0	250	306	395	77.6	9.4
180° 	5S5.294.1Y	AN	-	-	TF15	3.0	165	202	261	51.2	9.0
	5S5.324.1Y	AN	AQ	-	TF15	3.0	200	245	316	62.0	9.2
	5S5.364.1Y	-	AQ	AS	TF15	3.0	250	306	395	77.6	9.4
270° 	5S5.295.1Y	AN	-	-	TF15	3.0	165	202	261	51.2	9.0
	5S5.325.1Y	AN	AQ	-	TF15	3.0	200	245	316	62.0	9.2
	5S5.365.1Y	-	AQ	AS	TF15	3.0	250	306	395	77.6	9.4
270° 	5S5.296.1Y	AN	-	-	TF15	3.0	165	202	261	51.2	9.0
	5S5.326.1Y	AN	AQ	-	TF15	3.0	200	245	316	62.0	9.2
	5S5.366.1Y	-	AQ	AS	TF15	3.0	250	306	395	77.6	9.4
360° 	5S5.299.1Y	AN	-	-	TF15	3.0	165	202	261	51.2	9.0
	5S5.329.1Y	AN	AQ	-	TF15	3.0	200	245	316	62.0	9.2
	5S5.369.1Y	-	AQ	AS	TF15	3.0	250	306	395	77.6	9.4
	5S5.399.1Y	-	AQ	AS	TF15	3.0	300	367	474	93.1	9.6

E = narrowest free cross-section · NPT on request

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

### Information on operation

- Operation with compressed air only for short-term usage. Operation above the recommended operating pressure has negative effects on the cleaning result and wear.

### Slip-on information


- R-clip made of 316L SS is included (Ordering no.: 095.013.1Y.06.45.0).
- Depending on diameter of the adapter the flow rate can increase due to leakage between connecting pipe and rotating cleaning nozzle.

Example of ordering: Type 5S5.293.1Y. + Connection AN = Ordering no. 5S5.293.1Y.AN






# THE EFFECTIVE MEDIUM AGAINST THE MOST PERSISTENT SOILING

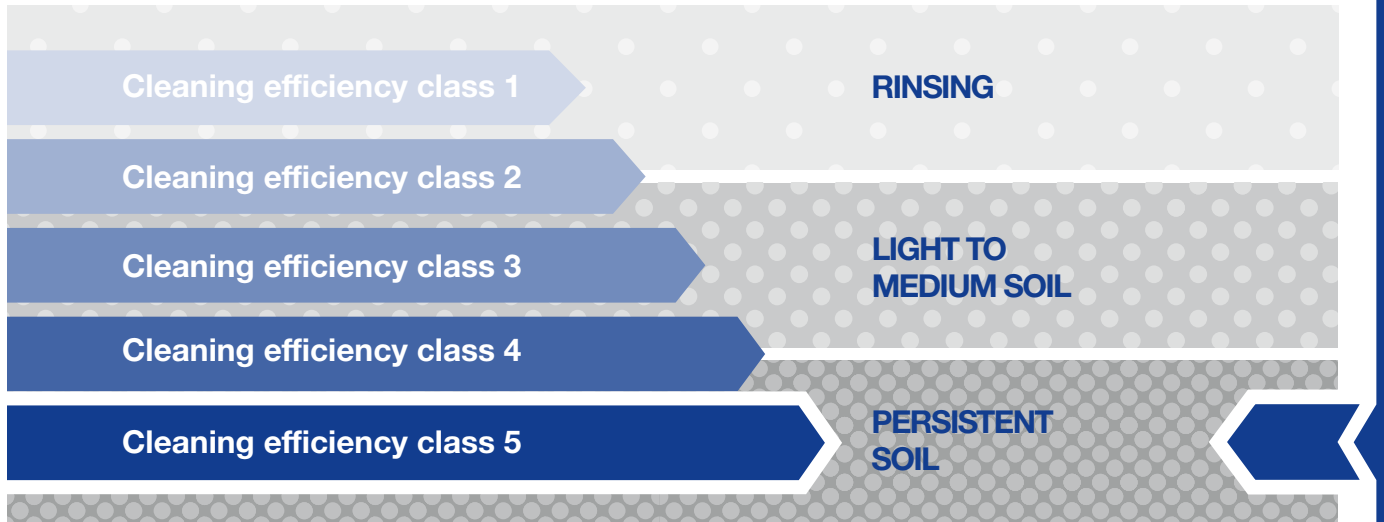


## Cleaning efficiency class 5


Persistent soiling requires special measures. That's why the Lechler high impact tank cleaning nozzles in efficiency class 5 are equipped with high-grade gear units and work with deliberately controlled rotation. They prove their capabilities in tasks in the food and beverage industry, the chemical and petrochemical industry and the paper industry.


Solid jet nozzles ensure maximum efficiency and maximum impact. Cleaning efficiency class 5 includes rotating cleaners that are suitable for medium to very large tanks. Process reliability is increased through combination with the Lechler rotation monitoring sensor.

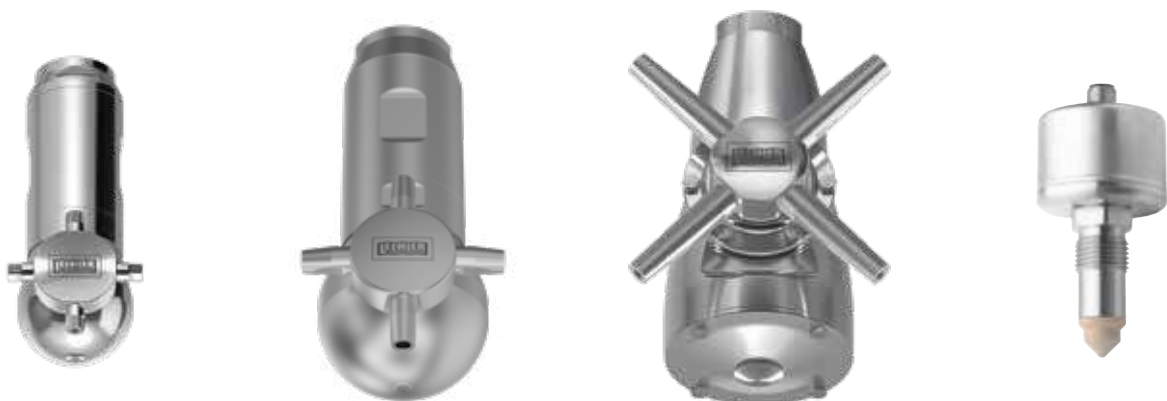


 <b>Max. tank diameter [m]</b>	0	3	6	9	12	15	18	21	24	27
---	---	---	---	---	----	----	----	----	----	----

 **Operating principles**  
Gear-controlled

 **Flow rates at 2 bar**  
25 to 260 l/min

 **Recommended operating pressures**  
5 bar

 **Max. temperatures**  
60 to 95 °C




# High impact tank cleaning machine

## »IntenseClean Hygienic«

### Series 5TA

#### Series 5TA

The IntenseClean Hygienic 5TA is a permanent feature, especially in the pharmaceutical, food and beverage industries. It is extremely effective thanks to the particularly powerful solid jet nozzles and is also suitable for small tanks with persistent soiling. The series can resist pressures of up to 15 bar and high temperatures without any problem. All parts used exhibit a particularly high surface quality.



Function video

Scan the QR-code or go to:

[www.lechler.com/intensecleanhygienic5ta](http://www.lechler.com/intensecleanhygienic5ta)



**Max. Tank diameter [m]**

0 | 3 | 6 | 9 | 12 | 15 | 18 | 21 | 24 | 27



#### Materials

316L SS, 632 SS,  
PEEK, PTFE,  
Zirconium oxide,  
EPDM



#### Max. temperature

95 °C



#### Recommended operating pressure

5 bar



#### Installation

Operation in every direction is possible



#### Filtration

Line strainer with a mesh size of 0.2 mm/80 mesh



#### Bearing

Ball bearing




#### Weight

0.9 kg




#### Rotation monitoring sensor


Sensor compatible,  
Info: see page 76

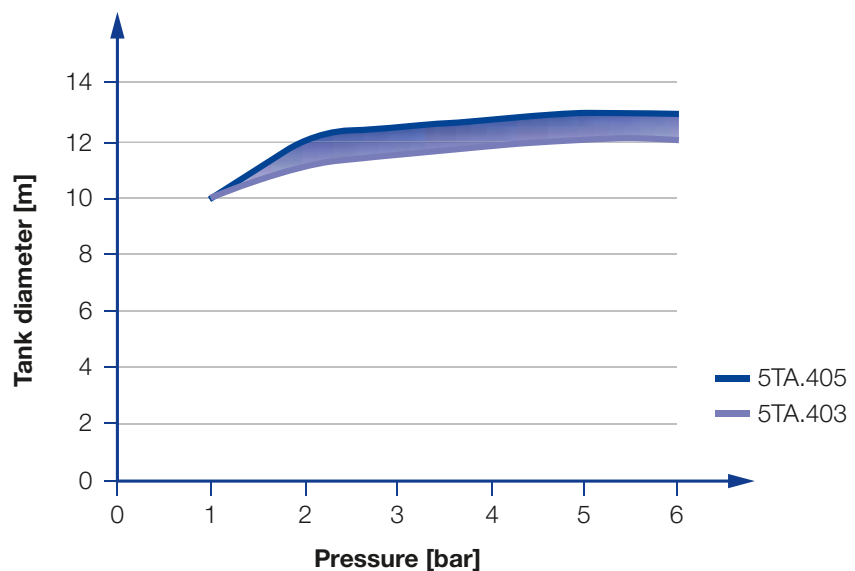

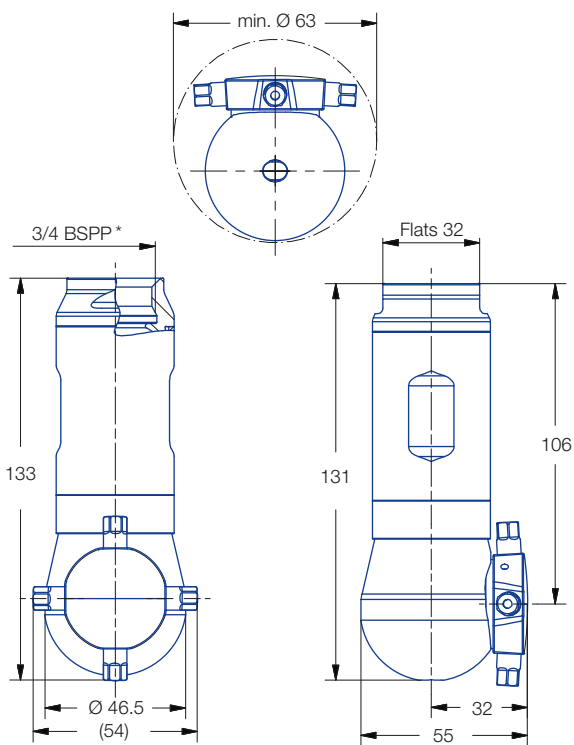

Overview of the tank diameter, depending upon the pressure of series 5TA

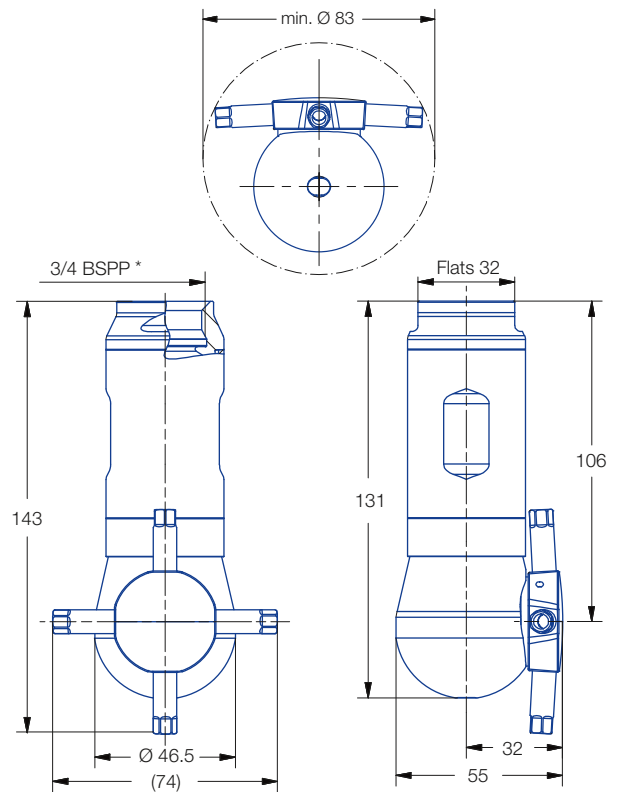

Female thread  
5TA.403.1Y.AL and 5TA.404.1Y.AL




Female thread  
5TA.405.1Y.AL

Spray angle 	Ordering no. Type	E Ø [mm]	Number. Ø Nozzles [mm]	V̇ [l/min]				Max. tank diameter [m]
				p [bar] (p <sub>max</sub> = 15 bar)				
				2	5	10	at 40 psi [US gal/min]	
360° 	5TA.403.1Y.AL	1.5	4 x 3.0	24	39	55	7.7	12.0
	5TA.404.1Y.AL	1.5	4 x 4.0	35	56	79	11	12.5
	5TA.405.1Y.AL	1.5	4 x 5.0	50	79	111	15.5	13.0

E = narrowest free cross-section  
\* Slip-on connection on request


The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

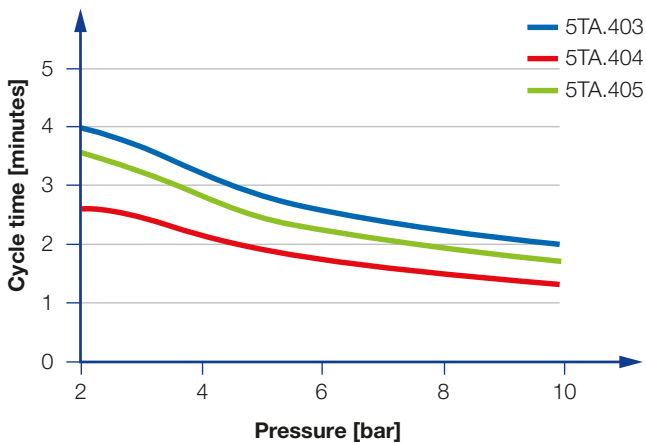

Cycle time depending on pressure of series 5TA

**Example of ordering with ATEX approval.  
FDA and (EC) 1935/2004 conform.**

Unit group/category/zones:

 II 1G Ex h IIB T6...T4 Ga

 II 1D Ex h IIIC T85 °C...T135 °C Da



Example  
of Ordering:

Type/Ordering no.  
5TA.403.1Y.AL.EX

**Example of ordering with FDA  
and (EC) 1935/2004 conformity.**

All Materials are suitable for  
contact with food.



Example  
of Ordering:

Type/Ordering no.  
5TA.403.1Y.AL



# High impact tank cleaning machine

## »IntenseClean Hygienic«

### Series 5TB

#### Series 5TB

The IntenseClean Hygienic 5TB has firmly established itself, above all in the pharmaceutical, food and beverage industries – and with good reason: The especially strong solid jets produce an extremely high degree of effectiveness, while the gear-controlled rotation ensures high levels of efficiency. All parts used are noted for their particularly high surface quality. This series is suitable for high pressures and temperatures.



**Max. Tank diameter [m]**

0 | 3 | 6 | 9 | 12 | 15 | 18 | 21 | 24 | 27



**Materials**

316L SS, 632 SS, PEEK, PTFE, Zirconium oxide, EPDM



**Max. temperature**

95 °C



**Recommended operating pressure**

5 bar



**Installation**

Operation in every direction is possible



**Filtration**

Line strainer with a mesh size of 0.2 mm/80 mesh



**Bearing**

Ball bearing




**Weight**

4.0 kg




**Rotation monitoring sensor**

Sensor compatible, Info: see page 76

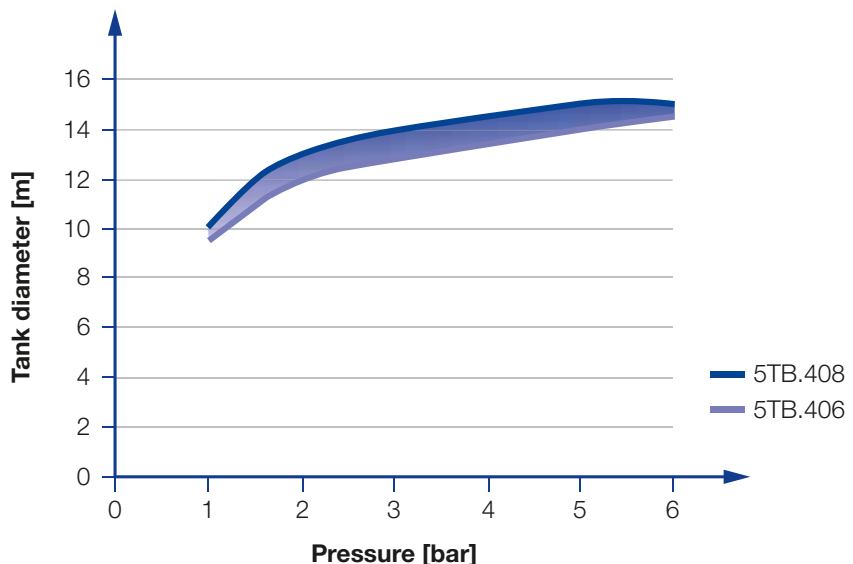


Overview of the tank diameter, depending upon the pressure of series 5TB

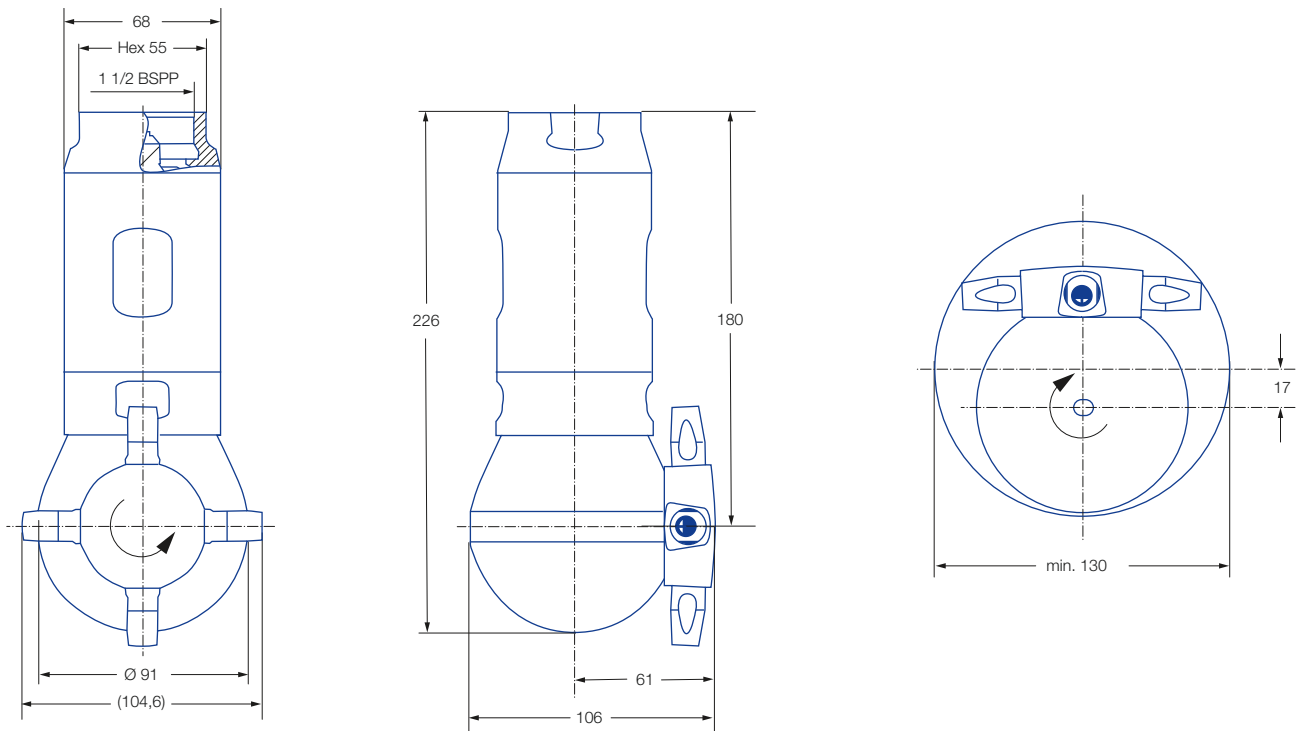

Spray angle	Ordering no. Type	E Ø [mm]	Number, Ø Nozzles [mm]	V̇ [l/min]				Max. tank diameter [m]
				p [bar] (p <sub>max</sub> = 25 bar)				
				2	5	10	at 40 psi [US gal/min]	
360°	<b>5TB.406.1Y.AS</b>	6.0	4 x 6.0	107	169	239	33.1	14.0
	<b>5TB.407.1Y.AS</b>	6.0	4 x 7.0	132	209	296	41.0	14.0
	<b>5TB.408.1Y.AS</b>	6.0	4 x 8.0	150	238	336	46.7	15.0

E = narrowest free cross-section

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

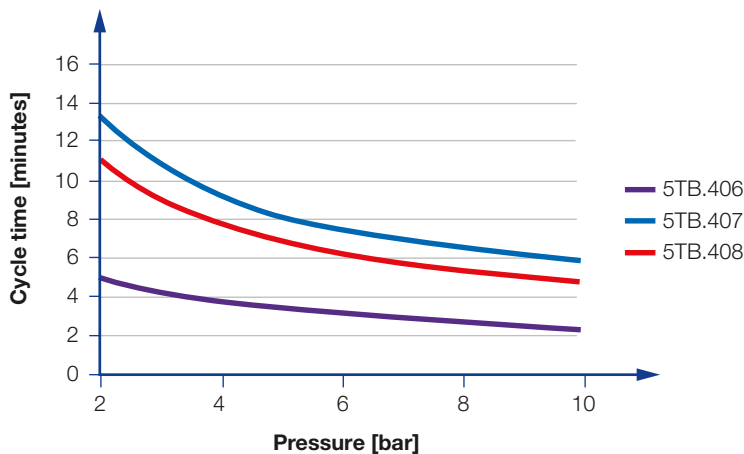

Cycle time depending on pressure of series 5TB

**Example of ordering with ATEX approval. FDA and (EC) 1935/2004 conform.**

Unit group/category/zones:

Ex II 1G Ex h IIB T6...T4 Ga

Ex II 1D Ex h IIIC T85 °C...T135 °C Da



Example of Ordering:

Type/Ordering no. 5TB.406.1Y.AS.EX

**Example of ordering with FDA and (EG) 1935/2004 conformity.**

All Materials are suitable for contact with food.



Example of Ordering:

Type/Ordering no. 5TB.406.1Y.AS



# High impact tank cleaning machine

## »IntenseClean«

### Series 5TM

#### Series 5TM

The IntenseClean is used in many applications, amongst others in the petrochemical industry. It is noted for its robust and proven construction, effective solid jets and gear-controlled rotation.



Function video

Scan the QR-code or go to:  
[www.lechler.com/intenseclean](http://www.lechler.com/intenseclean)



**Max. tank diameter [m]**

0 | 3 | 6 | 9 | 12 | 15 | 18 | 21 | 24 | 27



**Materials**  
316L SS, 304 SS, 302 SS,  
PTFE, PEEK



**Max. temperature**  
95 °C



**Recommended operating pressure**  
5 bar



**Installation**  
Operation in every direction is possible



**Filtration**  
Line strainer with a mesh size of 0.2 mm/80 mesh




**Bearing**  
Ball bearing



**Weight**  
7.5 kg




**Rotation monitoring sensor**  
Sensor compatible,  
Info: see page 76

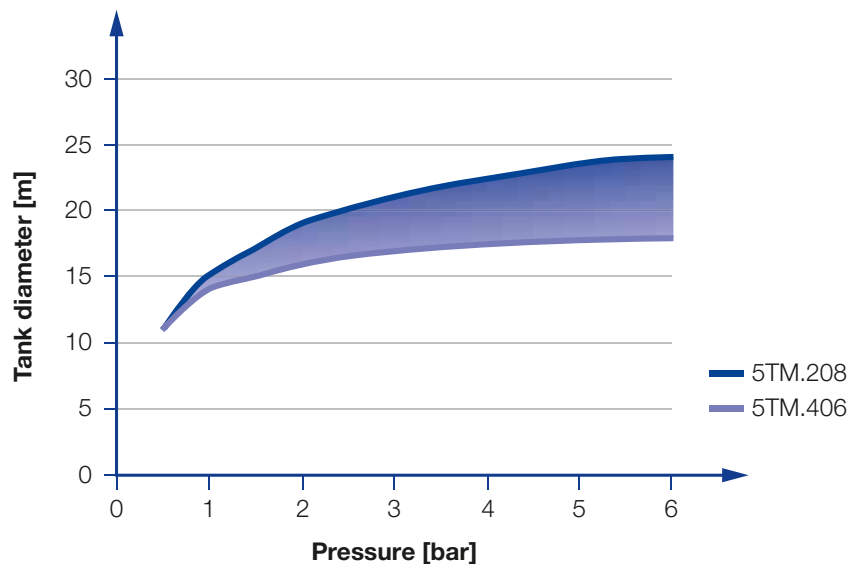


Overview of the tank diameter, depending upon the pressure of series 5TM



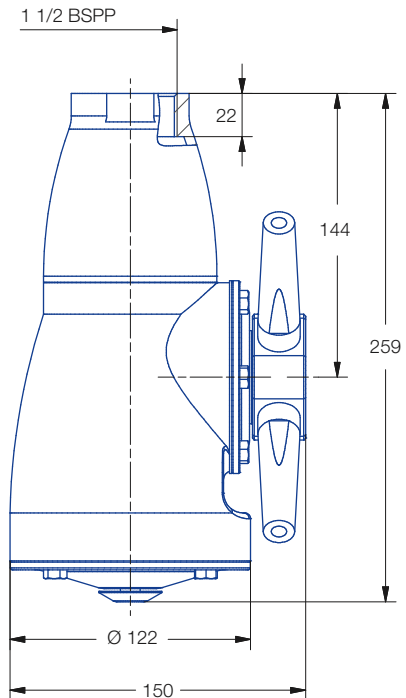

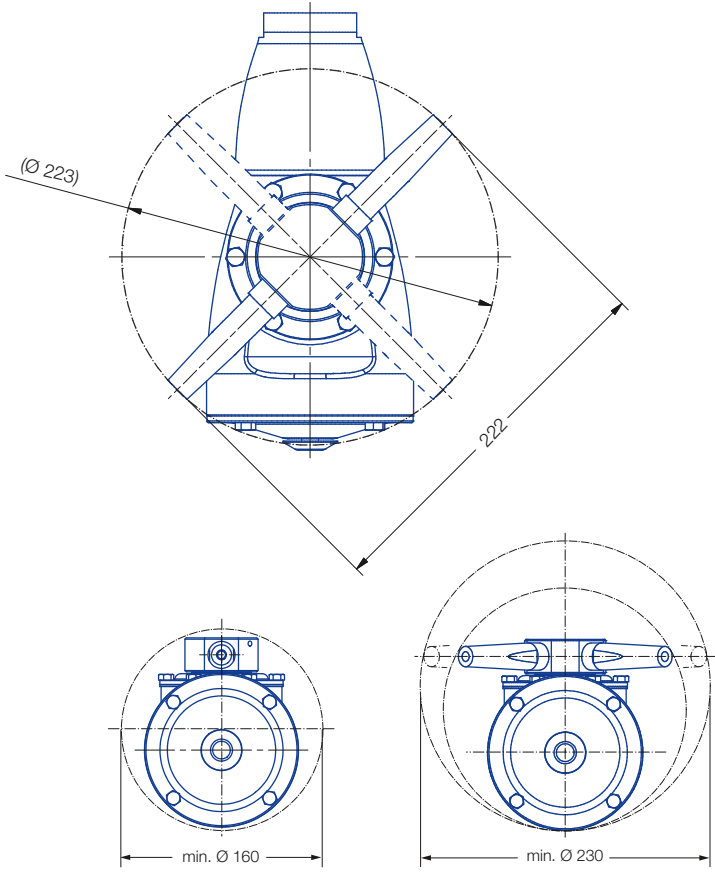

Female thread




5TM.2XX.1Y.AS (2 nozzles)

5TM.4XX.1Y.AS (4 nozzles)

Spray angle 	Ordering no.	E Ø [mm]	Number, Ø Nozzles [mm]	V̇ [l/min]				Max. tank diameter [m]
				p [bar] (p <sub>max</sub> = 7 bar)				
				2	3	5	at 40 psi [US gal/min]	
	5TM.208.1Y.AS	8	2 x 8.0	125	153	198	39	24.0
	5TM.210.1Y.AS	10	2 x 10.0	160	196	253	50	24.0
	5TM.406.1Y.AS	6	4 x 6.0	140	171	221	43	18.0
	5TM.407.1Y.AS	7	4 x 7.0	170	208	269	53	20.0
	5TM.408.1Y.AS	8	4 x 8.0	200	245	316	62	22.0
	5TM.410.1Y.AS	10	4 x 10.0	260	318	411	81	23.0

E = narrowest free cross-section

The maximum tank diameter shown above applies for the recommended operating pressure and is indicative only. The cleaning result is also affected by the type of soiling.

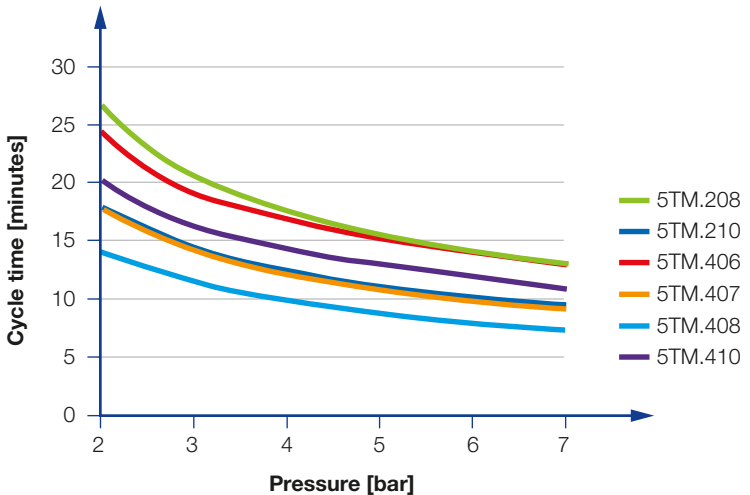


Cycle time depending on pressure of series 5TM



# Rotation Monitoring Sensor

Cleaning processes can be easily and reliably monitored with the Lechler rotation monitoring sensor. The sensor records the quantity of liquid flowing over the sensor tip. With the aid of the software\*, the sensor function can be specifically adjusted to the tank size, pressure and nozzle.

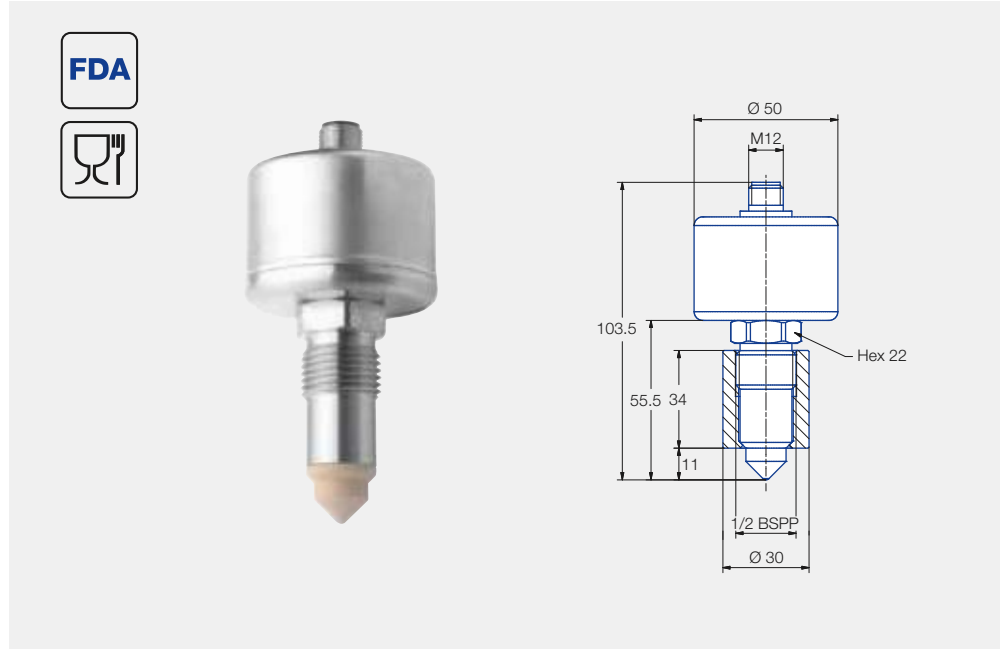

## Electrical data

- Supply voltage:  
Ub = 24 V +/-20%  
(18 to 32 VDC)
- Power requirements:  
< 20 mA
- Output signal:  
PNP, 50 mA short circuit protected, active

## Operating conditions

- Ambient temperature:  
-10° up to +60 °C
- Process temperature:  
0° up to +100 °C

## Materials

- Socket (G 1/2"): 316L SS
- Probe tip: PEEK
- Body: 303 SS

## Operating principle

- Capacitive

## Advantages

- Reliable recognition of any faults during the cleaning cycle
- The process connection of the sensor is in compliance with the hygiene guidelines of the EHEDG
- Simple operation
- Can be connected to PLC
- Only needs to be set up once using the software provided
- Can be specifically adapted to each cleaning task



## Ordering data

Ordering data	Ordering no.
Rotation monitoring sensor with weld-in sleeve	050.040.00.00.00.0
Cable set for first-time operation	050.040.00.00.01.0

## Rotation monitoring sensor with weld-in sleeve



## Cable set for first-time operation/installation




Main adapter with cable

USB adapter with cable

Programming adapter Y-piece

Weld-in mandrel

# FOR A COMPLETE CLEANING SPRAY SHADOW REMOVER

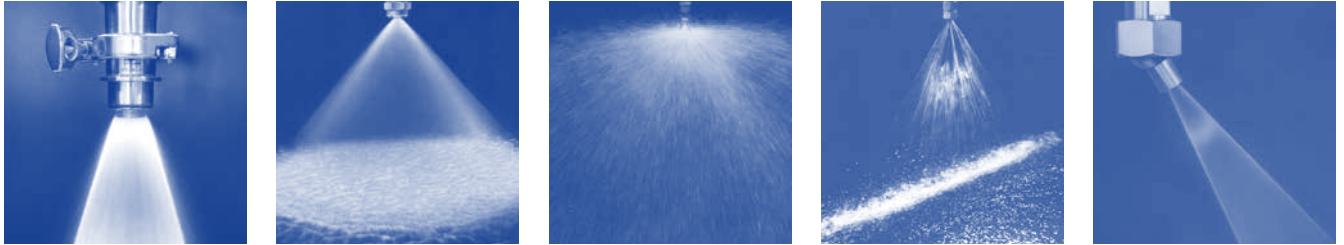

## Spray Shadow Remover

The range of applications of the static cleaning nozzles in the support of rotating cleaners focuses on particularly difficult tasks, such as equipment cleaning and the avoidance of spray shadows.

They deliberately support the cleaning efficiency of the process and are used in addition to rotating cleaners or spray balls to reach hard to access places and for removing persistent soiling.



# Pop-up cleaning nozzles »PopUp Clean« Series 5P5

## Series 5P5

The series PopUp Clean is used for cleaning agitators or other spray shadow areas. The tank cleaning nozzle made of high-quality materials convinces with its compact and robust design and can be installed flush with the wall.



### Material

316L SS,  
316Ti SS (spring),  
316 SS (snap ring),  
FKM (O-ring)



### Max. temperature

95 °C



### Recommended operating pressure

2 – 5 bar  
opening pressure  
0.3 bar  
closing pressure  
0.3 bar




### Installation

Operation in every direction is possible






### Filtration


Line strainer with a mesh size of 0.3 mm/  
50 mesh

Spray angle 	Ordering no. Type	E Ø [mm]	V̇ [l/min]		
			p [bar]		
			1	2	3
30°	<b>5P5.081.1Y.00.00.0</b>	0.7	35	50	61

E = narrowest free cross-section




### Nozzle installation

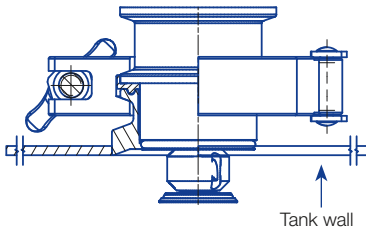

### Information on operation

The PopUp Clean is not suitable for operation with compressed air or any other gas.

### Weld-in flange



### Information

Gasket with a thickness of 2 mm must be used if the PopUp Whirly is installed with this weld-in flange.

### Ordering number

050.020.1Y.01.00


### Material

316L SS




# Axial-flow full cone nozzles Series 490/491

Non-clogging nozzle design. Stable spray angle. Particularly even liquid distribution.



Code  
CC-CG



Code  
AK-AM

Code	Dimensions [mm]				
	G	L <sub>1</sub>	L <sub>2</sub>	D	Hex/Flats
<b>CC</b>	1/4 BSPT	22.0	10.0	13.0	14
<b>CE</b>	3/8 BSPT	24.5	10.0	16.0	17
<b>CG</b>	1/2 BSPT	32.5	13.0	21.0	22
<b>AK</b>	3/4 BSPP	42.0	15.0	32.0	27
<b>AM</b>	1 BSPP	56.0	17.0	40.0	36

Subject to technical modification.  
In a critical installation situation, please ask for the exact dimensions.

Spray angle 	Type	Ordering no.						B Ø [mm]	E Ø [mm]	V [l/min]							Spray diameter D  at p=2 bar		
		Mat. no. 1Y	Code							p [bar]							H = 200 mm	H = 500 mm	
			316L SS	1/4 BSPT	3/8 BSPT	1/2 BSPT	3/4 BSPP			1 BSPP	0.5	1.0	2.0	3.0	5.0	7.0			10.0
60°	490.644	○	CC	CE	-	-	-	2.30	2.30	2.30	3.03	4.00	4.70	5.77	6.60	7.61	220	560	
	490.684	○	CC	CE	-	-	-	2.60	2.60	2.87	3.79	5.00	5.88	7.21	8.25	9.52	220	560	
	490.724	○	CC	CE	-	-	-	2.95	2.80	3.62	4.77	6.30	7.41	9.09	10.40	11.99	220	560	
	490.764	○	-	CE	-	-	-	3.25	3.25	4.59	6.06	8.00	9.41	11.54	13.20	15.22	220	560	
	490.804	○	-	CE	-	-	-	3.70	3.70	5.74	7.58	10.00	11.76	14.43	16.51	19.04	220	560	
	490.844	○	-	-	CG	-	-	4.05	4.05	7.18	9.47	12.50	14.70	18.03	20.63	23.80	220	560	
	490.884	○	-	-	CG	-	-	4.65	4.65	9.19	12.13	16.00	18.82	23.08	26.41	30.46	220	560	
	490.924	○	-	-	-	AK	-	5.20	5.20	11.49	15.16	20.00	23.52	28.85	33.01	38.07	220	560	
	490.964	○	-	-	-	AK	-	5.80	5.80	14.36	18.95	25.00	29.40	36.07	41.26	47.59	220	560	
	491.044	○	-	-	-	-	AM	7.25	7.25	22.97	30.31	40.00	47.04	57.71	66.02	76.15	220	560	
	491.084	○	-	-	-	-	AM	8.15	8.15	28.72	37.89	50.00	58.80	72.14	82.53	95.18	220	560	


E = narrowest free cross-section · B = bore diameter

Example    Type    + Material no. + Code = Ordering no.  
for ordering: 490.644    + 1Y    + CC    = 490.644.1Y.CC




# Deflector-plate nozzle Series 524/525

Full cone spray. Non clogging nozzle without swirl insert.



Type 524.809 – 525.269



Type 525.349 – 525.489

Spray angle 	Ordering no.		B Ø [mm]	$\dot{V}$ [l/min]						Spray diameter D [m]  at p=3 bar approx.	
	Type	Mat. no. 17 <sup>1</sup> 316Ti SS/316L SS		p [bar]						H = 1 m	H = 3 m
				0.5	1.0	2.0	3.0	5.0	10.0		
180°	524.809	○	4.00	5.00	7.10	10.00	12.20	15.80	22.40	5.60	6.40
	524.969	○	6.20	12.50	17.70	25.00	30.60	39.50	55.90	8.00	9.00
	525.049	○	8.00	20.00	28.30	40.00	49.00	63.20	89.40	10.00	13.20
	525.269	○	12.30	70.00	99.00	140.00	171.00	221.00	313.00	5.20	10.20
	525.349	○	16.20	112.00	158.40	224.00	274.30	354.20	500.80	4.80	9.70
	525.469	○	23.80	222.70	315.00	445.50	545.60	704.40	996.20	4.50	9.50
	525.489	○	25.30	250.00	353.60	500.00	612.40	790.60	1,118.00	4.00	9.00

B = bore diameter

<sup>1</sup>We reserve the right to deliver 316Ti SS or 316L SS under the material no. 17.


<b>Example of ordering:</b>	<b>Type</b>	<b>+</b>	<b>Material-no.</b>	<b>=</b>	<b>Ordering no.</b>
	525.809	+	17	=	525.809.17






# Flat fan nozzles Series 632/633


Standard design with conical, self-sealing thread connection. Stable spray angle. Uniform, parabolic distribution of liquid.



1/4" version



3/8" version




1/2" version








# Flat fan nozzles with ball joint Series 676

Swivelling nozzle for precise adjusting of jet direction. No gaskets necessary. Long, unproblematic service life.

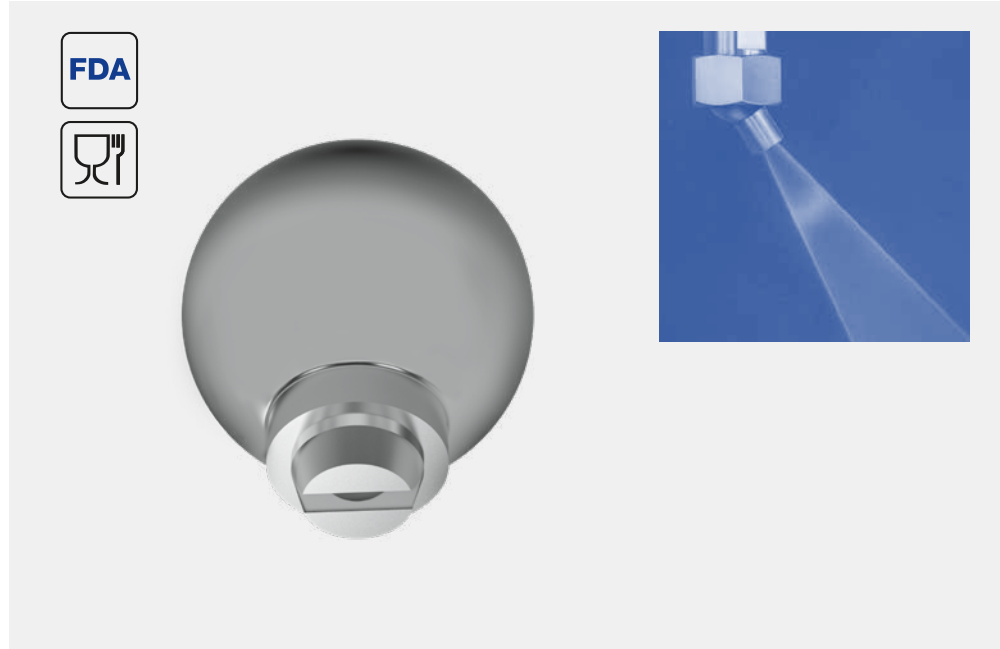

Allround swivelling by 30°



Spray angle 	Ordering no.		A Ø [mm]	E Ø [mm]	V̇ [l/min]						Spray width B  at p=2 bar	
	Type	Mat. no.			p [bar] (p <sub>max</sub> = 30 bar)						H = 250 mm	H = 500 mm
		16			0.5	1.0	2.0	3.0	5.0	10.0		
30°	676.642	○	2.50	1.80	2.00	2.83	4.00	4.90	6.33	8.94	120	240
	676.722	○	3.00	2.40	3.15	4.46	6.30	7.72	9.96	14.09	125	240
	676.762	○	3.50	2.70	4.00	5.66	8.00	9.80	12.65	17.89	125	245
	676.802	○	4.00	3.10	5.00	7.07	10.00	12.25	15.81	22.36	130	250
45°	676.643	○	2.50	1.80	2.00	2.83	4.00	4.90	6.33	8.94	195	370
	676.723	○	3.00	2.40	3.15	4.46	6.30	7.72	9.96	14.09	200	375
	676.763	○	3.50	2.60	4.00	5.66	8.00	9.80	12.65	17.89	200	380
	676.803	○	4.00	3.00	5.00	7.07	10.00	12.25	15.81	22.36	205	385
60°	676.644	○	2.50	1.60	2.00	2.83	4.00	4.90	6.33	8.94	295	565
	676.674	○	2.70	1.80	2.38	3.36	4.75	5.82	7.51	10.62	300	575
	676.724	○	3.00	2.10	3.15	4.46	6.30	7.72	9.96	14.09	305	590
	676.764	○	3.50	2.30	4.00	5.66	8.00	9.80	12.65	17.89	310	595


E = narrowest free cross-section · A = equivalent bore diameter

**Example**    **Type**    +    **Material no.**    =    **Ordering no.**  
**for ordering:**    676.642    +    16    =    676.642.16




# Flat fan nozzles with ball joint Series 676 – Accessories


**Retaining nut**  
**092.020.16.00.02**  
Material: 303 SS




**Socket**  
**092.020.16.AF.03**  
Material: 303 SS




**Retaining nipple**  
**092.024.16.AC.03**  
Material: 303 SS

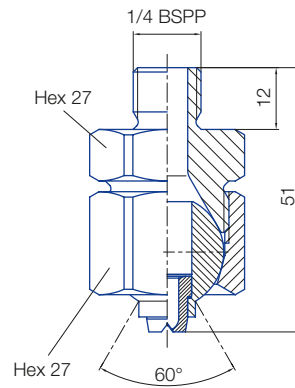

**Welding nipple**  
**092.020.17.00.04**  
Material: 316Ti SS

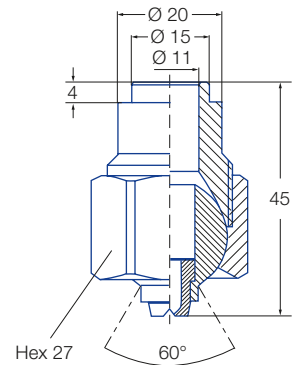

## Compact ball joints for narrow installation conditions




For series	Ordering no.			Dimensions						
	Type	Mat. no.	Code	G <sub>1</sub> BSPP	G <sub>2</sub> BSPP	L <sub>G1</sub> [mm]	L <sub>G2</sub> [mm]	L [mm]	Hex <sub>1</sub>	Hex <sub>2</sub>
		16 303 SS								
For all nozzles with 1/8" male thread	<b>092.010</b>	○	<b>AA</b>	1/8A	1/8	8.0	8.0	29.3	22	24
For all nozzles with 1/4" male thread	<b>092.024</b>	○	<b>AC</b>	1/4A	1/4	12.0	12.0	44	27	27
For all nozzles with 3/8" male thread	<b>092.030</b>	○	<b>AE</b>	3/8A	3/8	12.0	12.0	44	27	30

# YOU CAN FIND MORE NOZZLES IN OUR STANDARD CATALOGUE ...

The catalogue „Precision Spray Nozzles and Accessories“ is a sought-after manual of nozzle technology.

It contains valuable working aids and extensive technical information on Lechler products and ordering instructions.

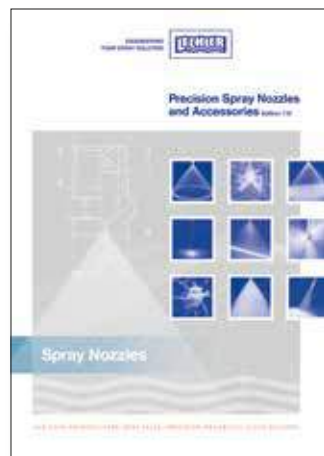

## ... AND IN OUR INDUSTRY BROCHURES

Information is available for various industries in special industry brochures.

All documents can be downloaded from our website at [www.lechler.com](http://www.lechler.com). We would also be happy to send you the brochures.



Brochure „Precision Spray Nozzles for the Food and Beverage Industry“

Brochure „Precision Spray Nozzles and Engineered Solutions for the Chemical Industry“

Brochure „Precision Spray Nozzles for Surface Technology“


# THE IDEAL SOLUTION TO THE PERFECT NOZZLE

## NOZZLE SELECTION QUESTIONNAIRE



Nobody knows your process and requirements better than you. Your knowledge is critical to us in order to find the optimal nozzle for your application.

Simply fax us the completed questionnaire or enter your information online.

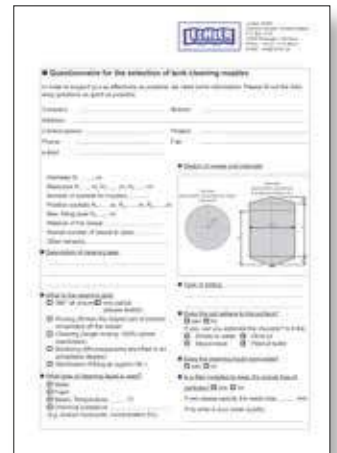

[www.lechler.com/tankcleaning/questionnaire\\_tankcleaning](http://www.lechler.com/tankcleaning/questionnaire_tankcleaning)

## FULL INFORMATION IS JUST A CLICK AWAY: THE LECHLER WEBSITE



Our website contains further information on our products as well as useful resources. In addition to technical data, there is also a product finder to help you in your search for the right nozzle.

[www.lechler.com](http://www.lechler.com)




## 3D DESIGN DATA FOR YOUR WORK



So you can work on your designs with reliable data from the outset, free 3D data on Lechler nozzles and accessories are available to you online.

- Your advantages:
- Time-saving, immediate download of design drawings and technical data
  - Simple, fast product selection
  - Preview function with product photo and 3D graphics
  - All popular 3D formats available
  - Free use following one-time registration




<http://lechler.partcommunity.com>

**ENGINEERING  
YOUR SPRAY SOLUTION**



## LECHLER WORLDWIDE

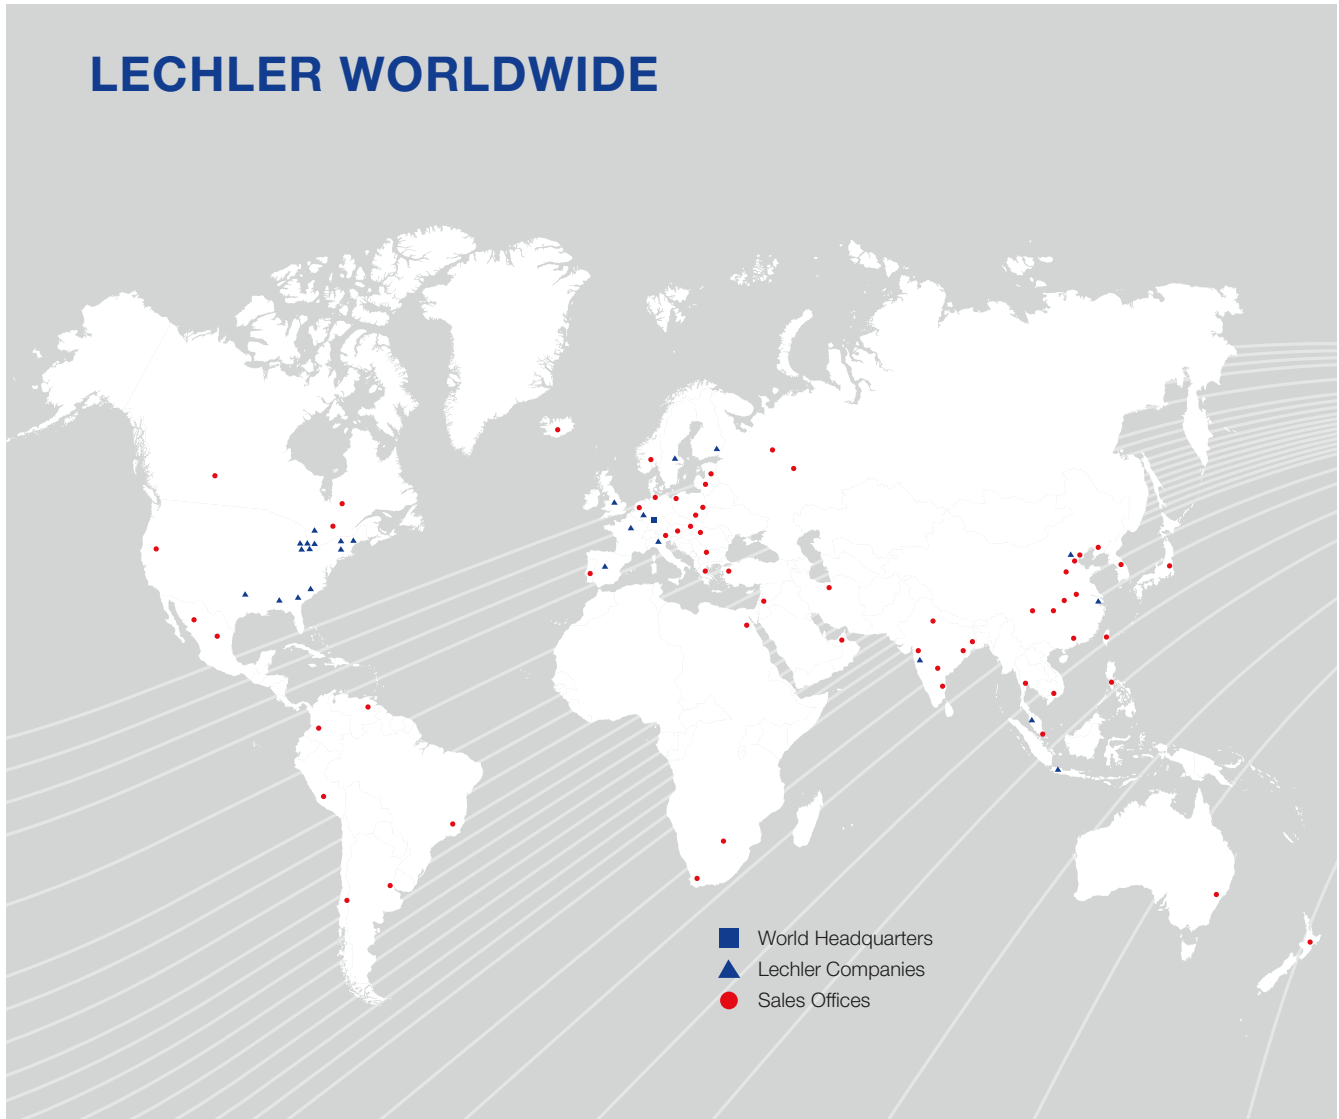

### **Lechler GmbH · Precision Nozzles · Nozzle Systems**

**P.O. Box 13 23 · 72544 Metzingen, Germany · Phone: +49 7123 962-0 · Fax: +49 7123 962-444 · info@lechler.de · www.lechler.com**

**ASEAN:** Lechler Spray Technology Sdn. Bhd. · No. 23, Jalan Teknologi 3/3A · Taman Sains Selangor 1 · Kota Damansara, PJU 5 · 47810 Petaling Jaya · Malaysia · info@lechler.com.my

**Belgium:** Lechler S.A./N.V. · Avenue Newton 4 · 1300 Wavre · Phone: +32 10 225022 · Fax: +32 10 243901 · info@lechler.be

**China:** Lechler Intl. Trad. Co. Ltd. · Beijing · Rm. 418 Landmark Tower · No. 8 Dong San Huan Bei Lu · Phone: +86 10 84537968, Fax: +86 10 84537458 · info@lechler.com.cn

**Finland:** Lechler Oy · Ansatie 6 a C 3 krs · 01740 Vantaa · Phone: +358 207 856880 · Fax: +358 207 856881 · info@lechler.fi

**France:** Lechler France, SAS · Bât. CAP2 · 66-72, Rue Marceau · 93558 Montreuil · Phone: +33 1 49882600 · Fax: +33 1 49882609 · info@lechler.fr

**Great Britain:** Lechler Ltd. · 1 Fell Street, Newhall · Sheffield, S9 2TP · Phone: +44 114 2492020 · Fax: +44 114 2493600 · info@lechler.com

**India:** Lechler (India) Pvt. Ltd. · Plot B-2 · Main Road · Wagle Industrial Estate · Thane (W) · 400604 · Phone: +91 22 40634444 · Fax: +91 22 406344988 · lechler@lechlerindia.com

**Italy:** Lechler Spray Technology S.r.l. · Via Don Dossetti 2 · 20080 Carpiano (MI) · Phone: +39 02 98859027 · Fax: +39 02 9815647 · info@lechleritalia.com

**Spain:** Lechler S.A. · Avda. Pirineos 7 · Oficina B7, Edificio Inbisa I · 28700 San Sebastián de los Reyes, Madrid · Phone: +34 91 6586346 · Fax: +34 91 6586347 · info@lechler.es

**Sweden:** Lechler AB · Kungsängsvägen 31 B · 753 23 Uppsala · Phone: +46 18 167030 · Fax: +46 18 167031 · info@lechler.se

**USA:** Lechler Inc. · 445 Kautz Road · St. Charles, IL, 60174 · Phone: +1 630 3776611 · Fax: +1 630 3776657 · info@lechlerUSA.com